SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M2 (Intel Xeon E5649, 2.53 GHz)

SPECint®_rate2006 = 338

SPECint_rate_base2006 = 326

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: Jan-2012
Hardware Availability: Mar-2011
Software Availability: Dec-2011

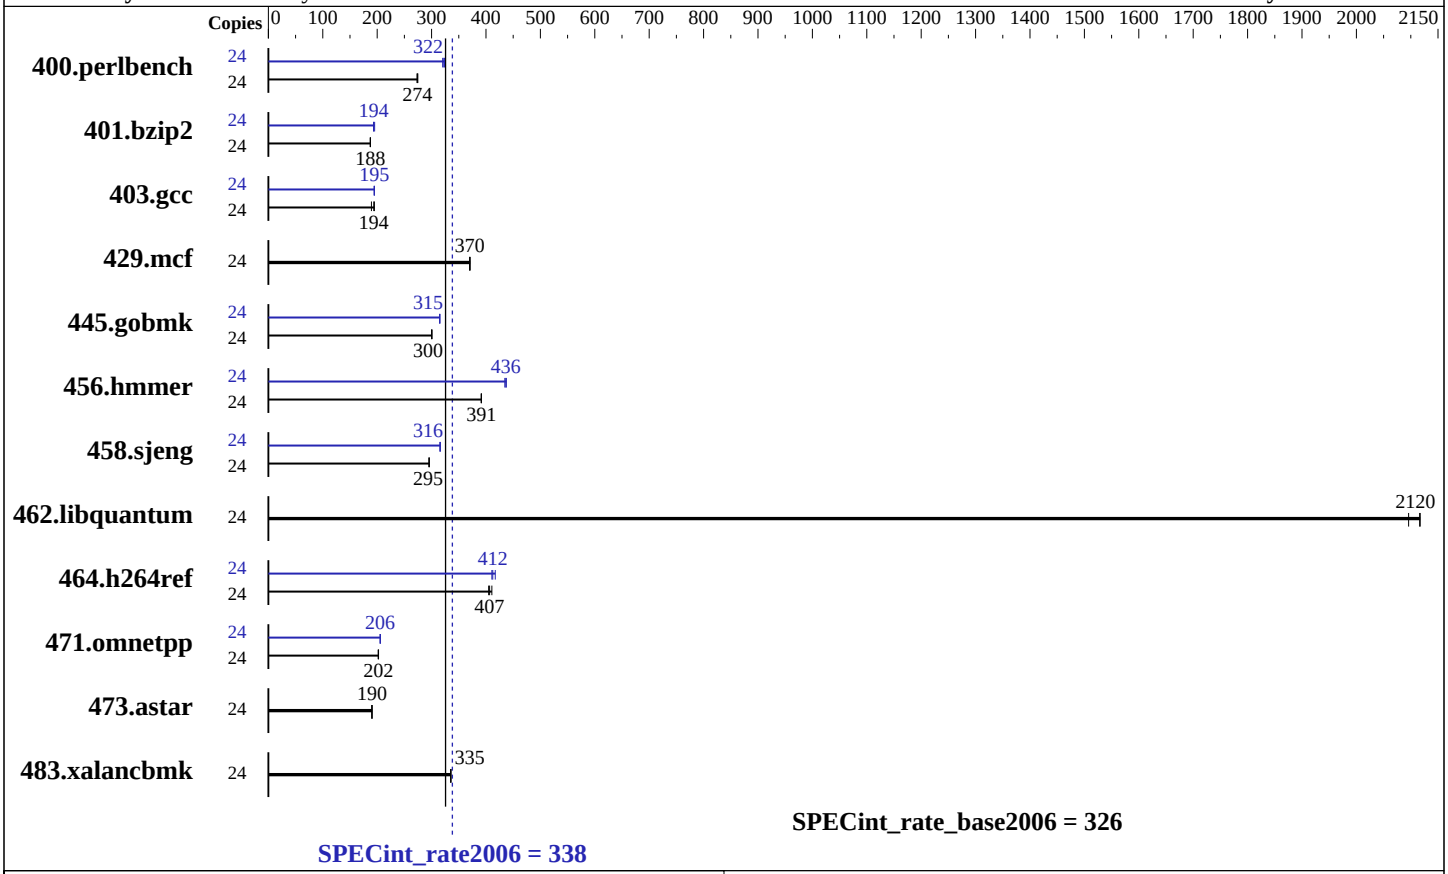

Hardware

CPU Name:	Intel Xeon E5649
CPU Characteristics:	Intel Turbo Boost Technology up to 2.93 GHz
CPU MHz:	2533
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	12 MB I+D on chip per chip
Other Cache:	None
Memory:	96 GB (12 x 8 GB 2Rx4 PC3L-10600R-9, ECC)
Disk Subsystem:	600 GB SAS 10K RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.2 (Santiago) 2.6.32-220.el6.x86_64
Compiler:	C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V9.01

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M2 (Intel Xeon E5649, 2.53 GHz)

SPECint_rate2006 = 338

SPECint_rate_base2006 = 326

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: Jan-2012
Hardware Availability: Mar-2011
Software Availability: Dec-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	**856**	**274**	858	273	853	275	24	724	324	**727**	**322**	732	320
401.bzip2	24	1238	187	**1234**	**188**	1234	188	24	1198	193	**1195**	**194**	1186	195
403.gcc	24	**997**	**194**	991	195	1020	189	24	**992**	**195**	994	194	991	195
429.mcf	24	590	371	**591**	**370**	592	370	24	590	371	**591**	**370**	592	370
445.gobmk	24	**838**	**300**	838	301	839	300	24	799	315	799	315	**799**	**315**
456.hmmer	24	572	392	572	391	**572**	**391**	24	512	437	**513**	**436**	515	435
458.sjeng	24	984	295	**983**	**295**	982	296	24	**920**	**316**	920	316	919	316
462.libquantum	24	237	2100	**235**	**2120**	235	2120	24	237	2100	**235**	**2120**	235	2120
464.h264ref	24	**1306**	**407**	1293	411	1312	405	24	**1288**	**412**	1273	417	1293	411
471.omnetpp	24	743	202	741	203	**742**	**202**	24	730	205	**729**	**206**	729	206
473.astar	24	884	191	887	190	**885**	**190**	24	884	191	887	190	**885**	**190**
483.xalancbmk	24	494	335	493	336	**494**	**335**	24	494	335	493	336	**494**	**335**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS Configuration : Data Reuse Optimization = Disabled
 Sysinfo program /opt/cpu2006/config/sysinfo.rev6800
 $Rev: 6800 $ $Date:: 2011-10-11 #$ 6f2ebdff5032aaa42e583f96b07f99d3
 running on localhost.localdomain Sun Jan 22 02:06:39 2012

 This section contains SUT (System Under Test) info as seen by
 some common utilities.  To remove or add to this section, see:
   http://www.spec.org/cpu2006/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5649 @ 2.53GHz
       2 "physical id"s (chips)
       24 "processors"
    cores, siblings (Caution: counting these is hw and system dependent.  The
    following excerpts from /proc/cpuinfo might not be reliable.  Use with
    caution.)
       cpu cores : 6
```

Continued on next page

Platform Notes (Continued)

```
        siblings  : 12
        physical 0: cores 0 1 2 8 9 10
        physical 1: cores 0 1 2 8 9 10
     cache size : 12288 KB

  From /proc/meminfo
     MemTotal:       98999868 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /usr/bin/lsb_release -d
     Red Hat Enterprise Linux Server release 6.2 (Santiago)

  From /etc/*release* /etc/*version*
     redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
     system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
     system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

  uname -a:
     Linux localhost.localdomain 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13
     EST 2011 x86_64 x86_64 x86_64 GNU/Linux

  run-level 3 Jan 22 01:50

  SPEC is set to: /opt/cpu2006
     Filesystem     Type    Size  Used Avail Use% Mounted on
     /dev/sda1      ext4    551G  5.5G  517G   2% /

  Additional information from dmidecode:

  (End of data from sysinfo program)
```

General Notes

```
 Environment variables set by runspec before the start of the run:
 LD_LIBRARY_PATH = "/opt/cpu2006/libs/32:/opt/cpu2006/libs/64"

  Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
  memory using RHEL5.5
  Transparent Huge Pages enabled with:
  echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
  Filesystem page cache cleared with:
  echo 1>       /proc/sys/vm/drop_caches
  runspec command invoked through numactl i.e.:
  numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
icc  -m32
```

C++ benchmarks:
```
icpc -m32
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
```

C++ benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/smartheap -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
```
icc  -m32
```

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:
```
icpc -m32
```

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/smartheap -lsmartheap

473.astar: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html`
`http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml`
`http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 03:45:33 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 February 2012.