SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

Sun Blade X6270 M3 (Intel Xeon E5-2690 2.9GHz)

SPECint®_rate2006 = 705

SPECint_rate_base2006 = 632

CPU2006 license: 6
Test sponsor: Oracle Corporation
Tested by: Oracle Corporation

Test date: Mar-2012
Hardware Availability: Apr-2012
Software Availability: Jun-2012

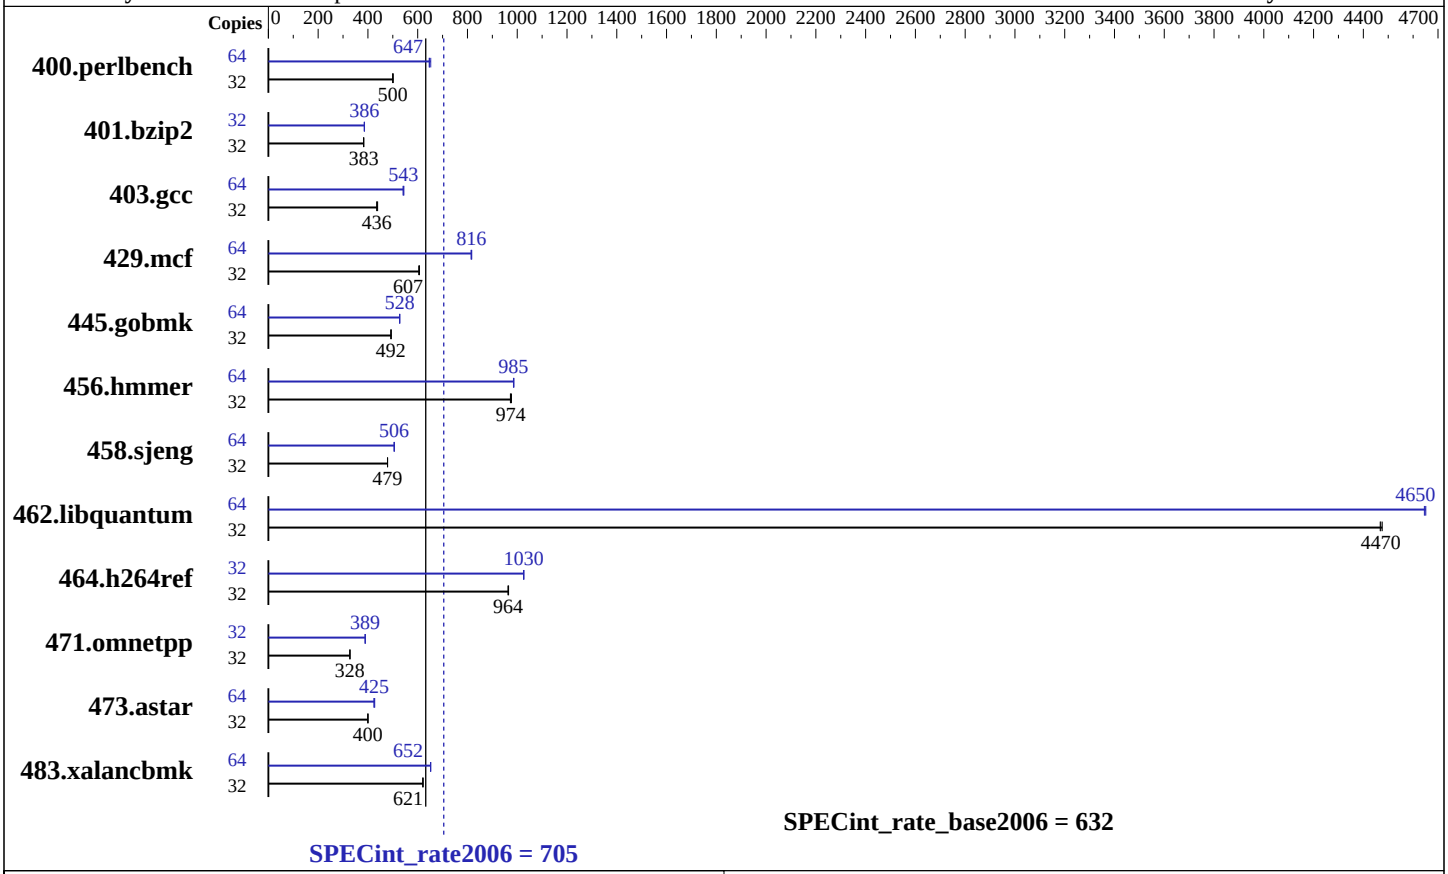

Hardware

CPU Name:	Intel Xeon E5-2690
CPU Characteristics:	Intel Turbo Boost Technology up to 3.80 GHz
CPU MHz:	2900
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable:	2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	20 MB I+D on chip per chip
Other Cache:	None
Memory:	128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem:	3 x 300 GB 10K RPM SAS
Other Hardware:	None

Software

Operating System:	Oracle Solaris 11 11/11 (SRU 02)
Compiler:	C/C++: Version 12.3 of Oracle Solaris Studio (patch update 1, tested with nightly build 20120313)
Auto Parallel:	No
File System:	zfs (with raidz)
System State:	Default
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V9.01

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

Sun Blade X6270 M3 (Intel Xeon E5-2690 2.9GHz)

SPECint_rate2006 = 705

SPECint_rate_base2006 = 632

CPU2006 license: 6
Test sponsor: Oracle Corporation
Tested by: Oracle Corporation

Test date: Mar-2012
Hardware Availability: Apr-2012
Software Availability: Jun-2012

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	623	502	626	499	**625**	**500**	64	958	652	968	646	**966**	**647**
401.bzip2	32	806	383	807	383	**806**	**383**	32	799	386	**800**	**386**	802	385
403.gcc	32	**590**	**436**	587	439	592	435	64	**948**	**543**	952	541	947	544
429.mcf	32	**481**	**607**	483	604	481	607	64	**715**	**816**	717	814	714	817
445.gobmk	32	682	492	680	494	**682**	**492**	64	1272	528	**1272**	**528**	1272	528
456.hmmer	32	307	973	306	977	**307**	**974**	64	606	985	605	987	**606**	**985**
458.sjeng	32	**809**	**479**	809	479	808	479	64	**1531**	**506**	1532	505	1530	506
462.libquantum	32	148	4480	148	4470	**148**	**4470**	64	285	4650	285	4650	**285**	**4650**
464.h264ref	32	734	965	735	963	**735**	**964**	32	690	1030	**690**	**1030**	691	1030
471.omnetpp	32	**610**	**328**	611	328	610	328	32	**514**	**389**	514	389	514	389
473.astar	32	562	399	561	400	**561**	**400**	64	1059	424	1051	427	**1057**	**425**
483.xalancbmk	32	356	621	355	622	**356**	**621**	64	678	652	677	652	**677**	**652**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used to bind processes to CPU threads with pbind(1)
```

Operating System Notes

```
ulimit -s 10000  (shell): increases stack

/etc/system parameters
   autoup=1000
   zfs:zfs_arc_max=0x400000000
   zfs:zfs_arc_min=0x400000000
   ncsize=0x10000
   lpg_alloc_prefer=1

gzip compression set using "zfs set compression=gzip <zfs-filesystem>"
```

Platform Notes

```
Default BIOS Settings were used, except:
  Energy Performance set to Performance

Oracle's Sun Blade X6270 M3 is now known as the Sun Blade X3-2B.

Sysinfo program /benchpool/data1/cpu2006v1.2/Docs/sysinfo
: 6775  2011-08-16 #f7622badcf24e01c368b1db4377c
running on bur398-85 Fri Mar 30 15:33:02 2012

This section contains SUT (System Under Test) info as seen by
```

Continued on next page

Platform Notes (Continued)

```
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo


From /usr/sbin/psrinfo -pv
 Intel(r) Xeon(r) CPU E5-2690 0 @ 2.90GHz
 x86 (GenuineIntel 206D7 family 6 model 45 step 7 clock 2893 MHz)

/usr/sbin/psrinfo -p:   2 chips
/usr/sbin/psrinfo -pv | grep "core has" | wc -l:  16 cores
/usr/sbin/psrinfo | wc -l: 32 threads

/usr/sbin/prtconf | grep "Memory size:": 131038 Megabytes

/etc/release:
                            Oracle Solaris 11 11/11 X86
uname -a:
SunOS bur398-85 5.11 11.0 i86pc i386 i86pc

disk: df -h
Filesystem             Size   Used  Available Capacity  Mounted on
benchpool/data1        545G    25G       521G     5%    /benchpool/data1

(End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
OMP_NUM_THREADS = "1"
```

Base Compiler Invocation

C benchmarks:
cc

C++ benchmarks:
CC

Base Portability Flags

400.perlbench: -DSPEC_CPU_SOLARIS_X64 -DSPEC_CPU_LP64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_SOLARIS -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64

Continued on next page

Base Portability Flags (Continued)

456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_SOLARIS -DSPEC_CPU_LP64
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_SOLARIS

Base Optimization Flags

C benchmarks:
-g -fast -xipo=2 -m64 -xaddr32 -xpagesize=2M -xalias_level=std

C++ benchmarks:
-fast -xipo=2 -m32 -xpagesize=2M -xalias_level=compatible
-library=stlport4 -lfast

Peak Compiler Invocation

C benchmarks:
cc

C++ benchmarks:
CC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_SOLARIS_X64 -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_SOLARIS
462.libquantum: -DSPEC_CPU_SOLARIS
483.xalancbmk: -DSPEC_CPU_SOLARIS

Peak Optimization Flags

C benchmarks:

400.perlbench: -g -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xprefetch=no%auto
-xtarget=nehalem -xipo=1 -m64 -xpagesize=2M
-xalias_level=std -lbsdmalloc

401.bzip2: -g -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -m64
-xpagesize=2M -xalias_level=strong

Continued on next page

Peak Optimization Flags (Continued)

403.gcc: -g -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -m32
-xpagesize=2M -xalias_level=std
-W2,-Abuiltin_opt:calloc_no_support=on

429.mcf: -g -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -m32
-xpagesize_heap=2M -xpagesize_stack=4k -xalias_level=std

445.gobmk: -g -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -m64 -xpagesize=2M
-xrestrict -xalias_level=strong

456.hmmer: -g -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -m64
-xpagesize=4k -xalias_level=strong

458.sjeng: -g -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xtarget=nehalem
-xipo=2 -m64 -xpagesize=2M -xalias_level=std

462.libquantum: -g -fast -xtarget=nehalem -xipo=2 -m64 -xpagesize=2M
-xalias_level=std -xunroll=8

464.h264ref: -g -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -m32
-xpagesize=2M -xalias_level=strong

C++ benchmarks:

471.omnetpp: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xpagesize=2M -xalias_level=compatible -library=stlport4
-L/benchpool/data1/cpu2006v1.2/SmartHeap_9/lib/ -R/benchpool/data1/cpu2006v1.2/SmartHeap_9/lib/ -lsma

473.astar: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -m64
-xpagesize=2M -xalias_level=compatible -xrestrict
-library=stlport4 -lfast

483.xalancbmk: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xpagesize=2M -xunroll=8 -library=stlport4 -lfast

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.3-x86_64.html
http://www.spec.org/cpu2006/flags/Oracle-platform-x86_64.CPUv1.2-RevA.20120425.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.3-x86_64.xml
http://www.spec.org/cpu2006/flags/Oracle-platform-x86_64.CPUv1.2-RevA.20120425.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 04:02:46 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 April 2012.