SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 7047R-TXRF (X9DRX+-F, Intel Xeon E5-2667)

SPECint®_rate2006 = 517

SPECint_rate_base2006 = 493

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Mar-2012
Hardware Availability: Mar-2012
Software Availability: Dec-2011

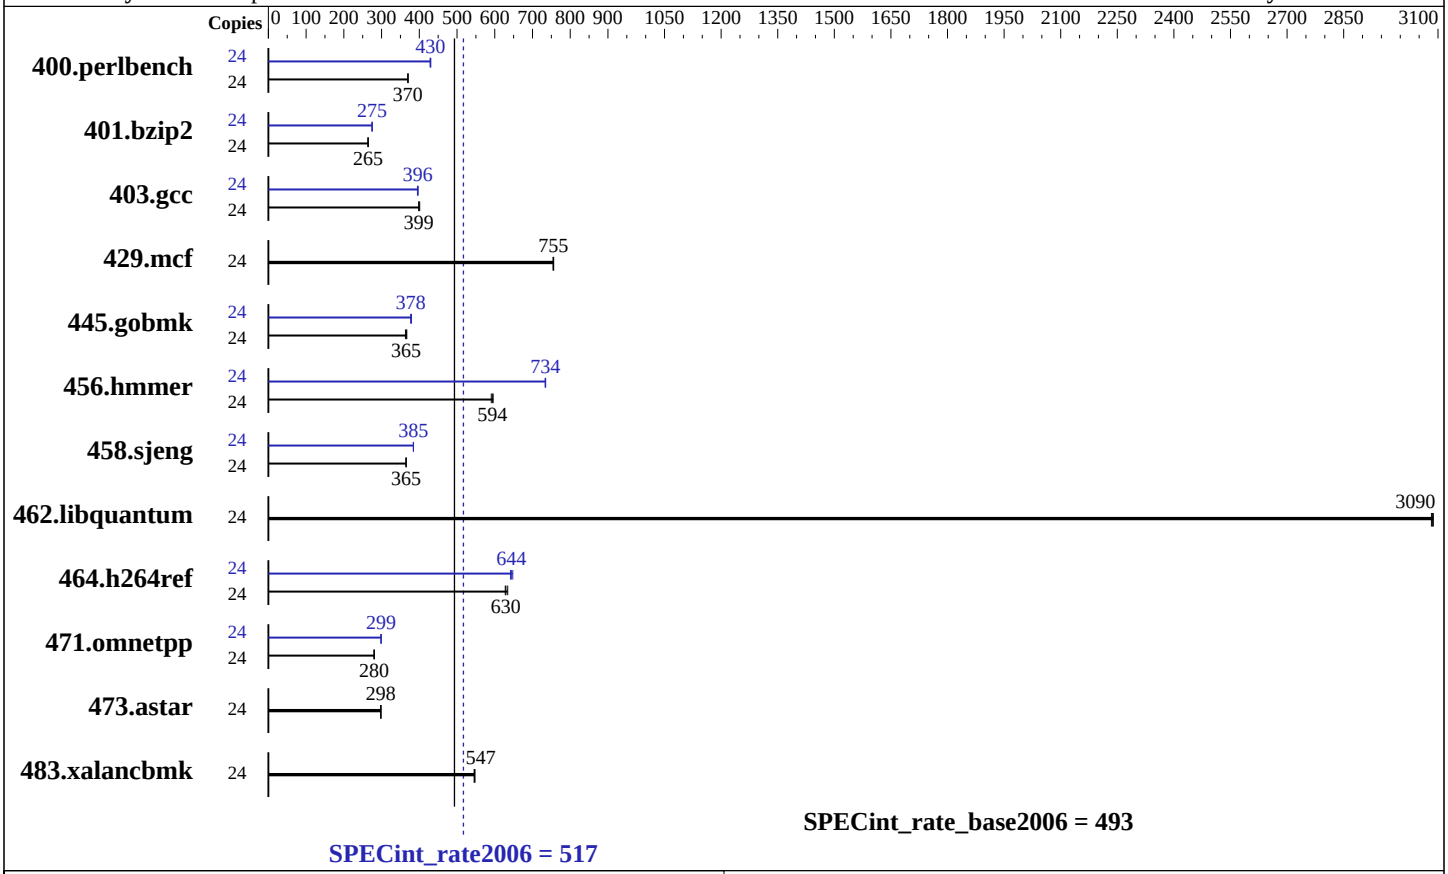

Hardware

CPU Name:	Intel Xeon E5-2667
CPU Characteristics:	Intel Turbo Boost Technology up to 3.50 GHz
CPU MHz:	2900
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	15 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem:	1 x 2 TB SATA II, 7200 RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server Release 6.2, Kernel 2.6.32-220.el6.x86_64
Compiler:	C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V9.01

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 7047R-TXRF (X9DRX+-F, Intel Xeon E5-2667)

SPECint_rate2006 = 517

SPECint_rate_base2006 = 493

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Mar-2012
Hardware Availability: Mar-2012
Software Availability: Dec-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	**634**	**370**	634	370	633	370	24	**545**	**430**	545	430	547	429
401.bzip2	24	878	264	875	265	**875**	**265**	24	842	275	843	275	**843**	**275**
403.gcc	24	482	401	**484**	**399**	485	399	24	487	397	**488**	**396**	489	395
429.mcf	24	**290**	**755**	290	755	289	756	24	**290**	**755**	290	755	289	756
445.gobmk	24	693	363	**689**	**365**	686	367	24	**667**	**378**	667	378	664	379
456.hmmer	24	**377**	**594**	376	596	379	591	24	305	734	305	735	**305**	**734**
458.sjeng	24	**796**	**365**	795	365	796	365	24	755	385	756	384	**755**	**385**
462.libquantum	24	161	3080	161	3090	**161**	**3090**	24	161	3080	161	3090	**161**	**3090**
464.h264ref	24	**843**	**630**	837	634	846	628	24	820	648	**825**	**644**	828	642
471.omnetpp	24	**535**	**280**	535	280	536	280	24	502	299	503	298	**502**	**299**
473.astar	24	564	298	**565**	**298**	566	298	24	564	298	**565**	**298**	566	298
483.xalancbmk	24	**303**	**547**	304	545	303	547	24	**303**	**547**	304	545	303	547

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64"

 Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
 memory using RHEL5.5
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
icc  -m32
```

C++ benchmarks:
```
icpc -m32
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
```

C++ benchmarks:
```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/smartheap -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
```
icc  -m32
```

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:
```
icpc -m32
```

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xAVX -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html`
`http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-revA.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml`
`http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-revA.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 05:00:47 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 9 May 2012.