SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei BH622 V2 (Intel Xeon E5-2650L)

SPECint®_rate2006 = 460

SPECint_rate_base2006 = 440

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Apr-2012
Hardware Availability: Mar-2012
Software Availability: Dec-2011

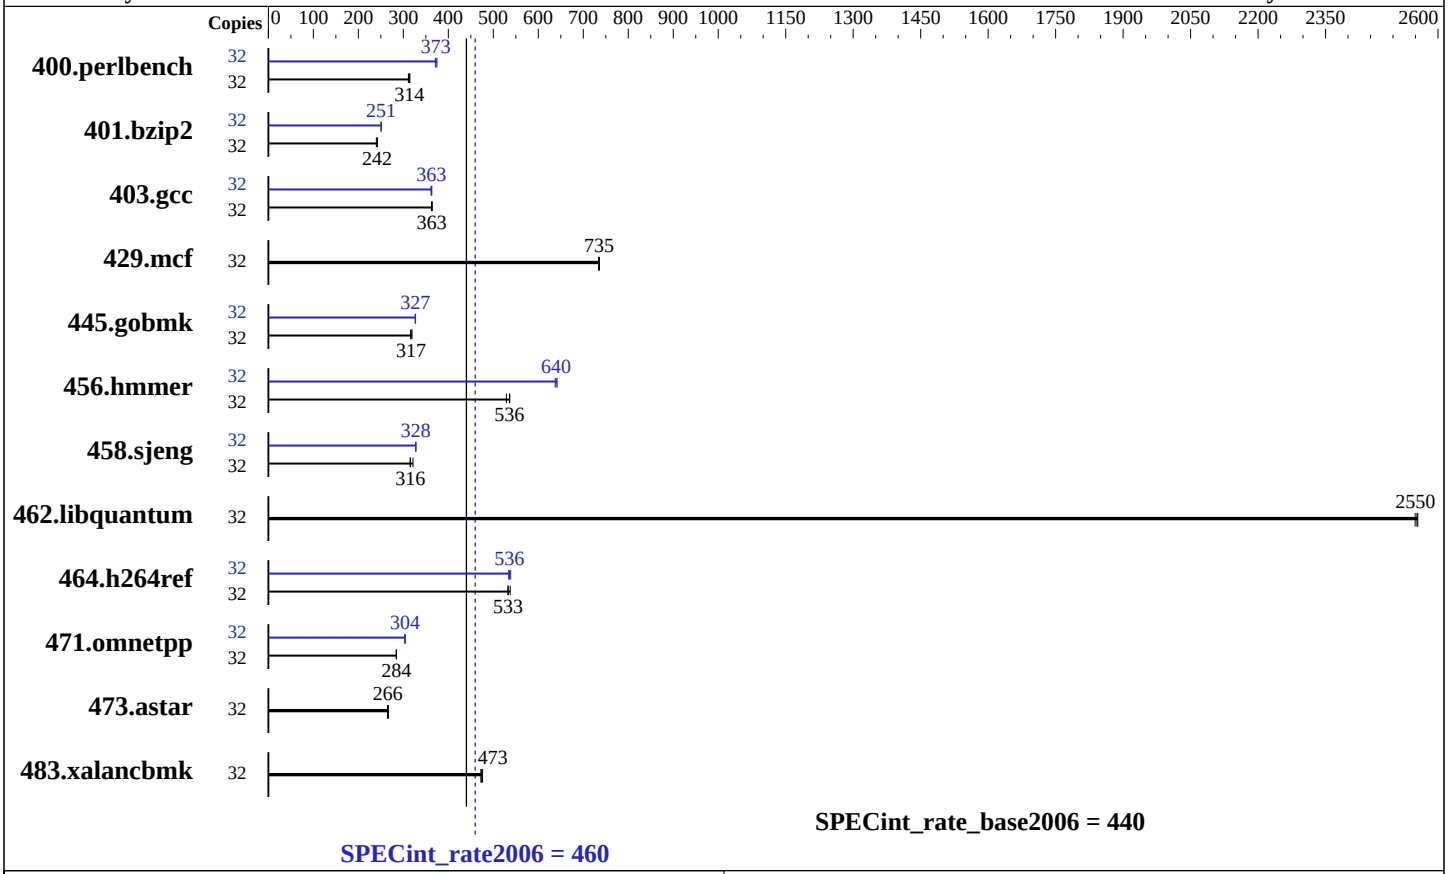

Hardware

CPU Name:	Intel Xeon E5-2650L
CPU Characteristics:	Intel Turbo Boost Technology up to 2.30 GHz
CPU MHz:	1800
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	20 MB I+D on chip per chip
Other Cache:	None
Memory:	128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem:	1 X 300 GB 10000 RPM SAS
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.2 (Santiago) 2.6.32-220.el6.x86_64
Compiler:	C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V9.01

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei BH622 V2 (Intel Xeon E5-2650L)

SPECint_rate2006 = 460

SPECint_rate_base2006 = 440

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Apr-2012
Hardware Availability: Mar-2012
Software Availability: Dec-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	995	314	**996**	**314**	1004	311	32	842	371	834	375	**839**	**373**
401.bzip2	32	1287	240	**1277**	**242**	1274	242	32	1234	250	**1231**	**251**	1229	251
403.gcc	32	710	363	**710**	**363**	707	364	32	709	363	713	362	**711**	**363**
429.mcf	32	397	736	398	734	**397**	**735**	32	397	736	398	734	**397**	**735**
445.gobmk	32	1051	319	1062	316	**1058**	**317**	32	1028	326	1026	327	**1027**	**327**
456.hmmer	32	564	529	556	537	**557**	**536**	32	468	638	465	642	**467**	**640**
458.sjeng	32	1229	315	1204	321	**1226**	**316**	32	1181	328	**1181**	**328**	1183	327
462.libquantum	32	259	2560	260	2550	**260**	**2550**	32	259	2560	260	2550	**260**	**2550**
464.h264ref	32	1330	532	**1328**	**533**	1317	538	32	**1321**	**536**	1326	534	1315	539
471.omnetpp	32	702	285	**703**	**284**	703	284	32	**658**	**304**	660	303	658	304
473.astar	32	842	267	**846**	**266**	848	265	32	842	267	**846**	**266**	848	265
483.xalancbmk	32	**467**	**473**	464	476	467	473	32	**467**	**473**	464	476	467	473

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
Sysinfo program /spec/config/sysinfo.rev6800
$Rev: 6800 $ $Date:: 2011-10-11 #$ 6f2ebdff5032aaa42e583f96b07f99d3
running on BH622-RH6.2 Fri Jan 28 02:21:23 2011

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2650L 0 @ 1.80GHz
      2 "physical id"s (chips)
      32 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 8
      siblings  : 16
```

Continued on next page

Platform Notes (Continued)

```
        physical 0: cores 0 1 2 3 4 5 6 7
        physical 1: cores 0 1 2 3 4 5 6 7
     cache size : 20480 KB

  From /proc/meminfo
     MemTotal:       132124016 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
     system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
     system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

  uname -a:
     Linux BH622-RH6.2 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
     x86_64 x86_64 x86_64 GNU/Linux

  run-level 3 Jan 28 02:07

  SPEC is set to: /spec
     Filesystem     Type    Size  Used Avail Use% Mounted on
     /dev/sda1      ext4    197G  115G   73G  62% /

  Additional information from dmidecode:
    Memory:
     16x Samsung M393B1K70DH0-CK0 8 GB 1600 MHz 2 rank
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64"

 Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
 memory using RHEL5.5
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc  -m32
```

C++ benchmarks:

```
icpc -m32
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`

C++ benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`
`-Wl,-z,muldefs -L/smartheap -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m32`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:
`icpc -m32`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`

Continued on next page

Peak Portability Flags (Continued)

462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html`
`http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revD.20120509.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml`
`http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revD.20120509.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 09:12:54 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 31 May 2012.