SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 1012G-MTF
(H8SGL-F, AMD Opteron 6276)

SPECint®_rate2006 = 248

SPECint_rate_base2006 = 217

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: May-2012
Hardware Availability: Nov-2011
Software Availability: Dec-2011

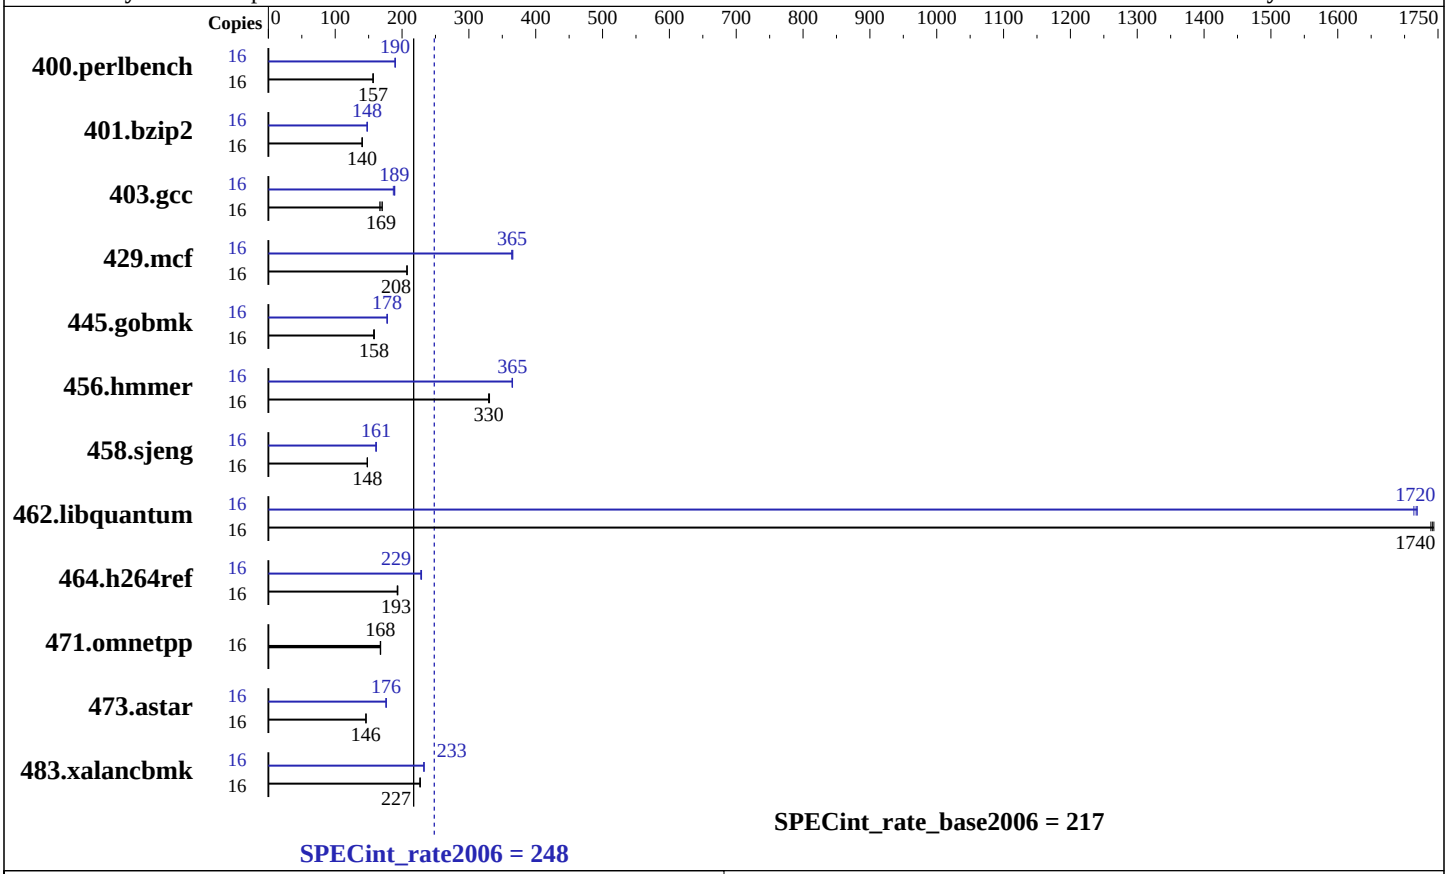

Hardware

CPU Name:	AMD Opteron 6276
CPU Characteristics:	AMD Turbo CORE technology up to 3.20 GHz
CPU MHz:	2300
FPU:	Integrated
CPU(s) enabled:	16 cores, 1 chip, 16 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	512 KB I on chip per chip, 64 KB I shared / 2 cores; 16 KB D on chip per core
Secondary Cache:	16 MB I+D on chip per chip, 2 MB shared / 2 cores
L3 Cache:	16 MB I+D on chip per chip, 8 MB shared / 8 cores
Other Cache:	None
Memory:	64 GB (8 x 8 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem:	1 x 300 GB SATA, 10000 RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.2, Kernel 2.6.32-220.el6.x86_64
Compiler:	C/C++: Version 4.5.1 of x86 Open64 Compiler Suite (from AMD)
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (Full multiuser with network)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap 10.0 32-bit Library for Linux

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 1012G-MTF
(H8SGL-F, AMD Opteron 6276)

SPECint_rate2006 = 248

SPECint_rate_base2006 = 217

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: May-2012
Hardware Availability: Nov-2011
Software Availability: Dec-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	999	157	996	157	**998**	**157**	16	**823**	**190**	825	189	823	190
401.bzip2	16	1098	141	**1100**	**140**	1102	140	16	1045	148	1042	148	**1045**	**148**
403.gcc	16	755	171	773	167	**764**	**169**	16	**682**	**189**	681	189	689	187
429.mcf	16	**703**	**208**	704	207	703	208	16	399	366	401	364	**400**	**365**
445.gobmk	16	**1060**	**158**	1066	158	1059	158	16	946	177	943	178	**944**	**178**
456.hmmer	16	**452**	**330**	451	331	453	330	16	409	365	**409**	**365**	409	365
458.sjeng	16	1306	148	**1307**	**148**	1310	148	16	**1201**	**161**	1203	161	1199	161
462.libquantum	16	191	1740	190	1740	**190**	**1740**	16	**193**	**1720**	193	1710	193	1720
464.h264ref	16	1836	193	**1834**	**193**	1827	194	16	1553	228	1545	229	**1546**	**229**
471.omnetpp	16	**596**	**168**	597	167	595	168	16	**596**	**168**	597	167	595	168
473.astar	16	**769**	**146**	769	146	769	146	16	**638**	**176**	637	176	638	176
483.xalancbmk	16	486	227	487	227	**486**	**227**	16	**474**	**233**	474	233	475	233

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152'  was used to set environment locked pages in memory limit

Set transparent_hugepage=never as a boot parameter in /boot/grub/menu.lst

Set vm/nr_hugepages=14336 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "896"
LD_LIBRARY_PATH = "/usr/cpu2006/amd1104-rate-libs-revC/32:/usr/cpu2006/amd1104-rate-libs-revC/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
http://developer.amd.com/cpu/open64

Binaries were compiled on a system with 2x AMD Opteron 6274 chips + 64GB Memory using RHEL 6.1
```

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-march=bdver1 -Ofast -CG:local_sched_alg=1 -INLINE:aggressive=ON
-IPA:plimit=8000 -IPA:small_pu=100 -HP:bd=2m:heap=2m -mso
-LNO:prefetch=2

C++ benchmarks:
-march=bdver1 -Ofast -m32 -INLINE:aggressive=on -CG:cmp_peep=on
-D__OPEN64_FAST_SET -L/root/work/libraries/SmartHeap-10/lib -lsmartheap

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

Continued on next page

Peak Portability Flags (Continued)

401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=2 -LNO:opt=0
-IPA:plimit=20000 -OPT:unroll_times_max=8
-OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
-WOPT:if_conv=0 -WOPT:sib=on -CG:local_sched_alg=1
-CG:unroll_fb_req=on -CG:movext_icmp=off -HP:bd=2m:heap=2m

401.bzip2: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -LNO:prefetch=2 -LNO:pf2=0
-OPT:alias=disjoint -OPT:goto=off -CG:local_sched_alg=1
-HP:bdt=2m:heap=2m

403.gcc: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
-CG:cmp_peep=on -CG:pre_minreg_level=2 -m32
-HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200
-WOPT:sib=on

429.mcf: -march=bdver1 -O3 -OPT:unroll_times_max=5 -ipa
-INLINE:aggressive=on -CG:gcm=off -CG:dsched=on
-GRA:prioritize_by_density=on -m32 -HP:bdt=2m:heap=2m -mso

445.gobmk: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:unroll_size=256
-OPT:unroll_times_max=8 -OPT:keep_ext=on -IPA:plimit=750
-IPA:min_hotness=300 -IPA:pu_reorder=1
-LNO:ignore_feedback=off -WOPT:if_conv=2 -HP:bd=2m:heap=2m

456.hmmer: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=2
-OPT:alias=disjoint -OPT:unroll_times_max=16
-OPT:unroll_size=512 -OPT:unroll_level=2 -OPT:keep_ext=on
-CG:cflow=0 -CG:cmp_peep=on -CG:pre_local_sched=off
-HP:bdt=2m:heap=2m

Continued on next page

Peak Optimization Flags (Continued)

458.sjeng: `-march=bdver1 -fb_create fbdata`(pass 1)
`-fb_opt fbdata`(pass 2) `-Ofast -CG:ptr_load_use=0`
`-CG:divrem_opt=on -CG:movext_icmp=off -CG:locs_best=on`
`-LNO:full_unroll=10 -IPA:pu_reorder=2 -HP:heap=2m:bd=2m`
`-WOPT:sib=on`

462.libquantum: `-march=bdver1 -Ofast -mso -OPT:unroll_size=512`
`-OPT:unroll_times_max=16 -LNO:prefetch=2`
`-LNO:prefetch_ahead=4 -LNO:pf2=0 -CG:local_sched_alg=1`
`-CG:p2align=0 -INLINE:aggressive=ON -IPA:plimit=15000`
`-IPA:small_pu=100 -HP:bdt=2m:heap=2m,limit=300`

464.h264ref: `-march=bdver1 -fb_create fbdata`(pass 1)
`-fb_opt fbdata`(pass 2) `-O3 -OPT:unroll_size=256`
`-OPT:unroll_times_max=2 -IPA:plimit=20000`
`-OPT:alias=disjoint -CG:ptr_load_use=0`
`-CG:local_sched_alg=1 -HP:bdt=2m:heap=2m`

C++ benchmarks:

471.omnetpp: `basepeak = yes`

473.astar: `-march=bdver1 -fb_create fbdata`(pass 1)
`-fb_opt fbdata`(pass 2) `-Ofast -TENV:frame_pointer=off`
`-WOPT:if_conv=0 -WOPT:sib=on -CG:divrem_opt=on`
`-CG:p2align=1 -CG:dsched=on -GRA:optimize_boundary=on`
`-OPT:alias=disjoint -INLINE:aggressive=on`
`-IPA:small_pu=3000 -IPA:plimit=3000 -m32`
`-HP:bdt=2m:heap=2m`

483.xalancbmk: `-march=bdver1 -Ofast -LNO:prefetch=2 -OPT:unroll_size=512`
`-OPT:unroll_times_max=8 -D__OPEN64_FAST_SET`
`-INLINE:aggressive=on -m32 -CG:cmp_peep=on`
`-CG:local_sched=off -CG:p2align=1 -GRA:unspill=on`
`-TENV:frame_pointer=off -fno-emit-exceptions`
`-L/root/work/libraries/SmartHeap-10/lib -lsmartheap`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/x86-open64-451-flags-rate-revC-I.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/x86-open64-451-flags-rate-revC-I.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 10:01:21 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 July 2012.