SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

CELSIUS W520 (Intel Xeon E3-1280 v2)

SPECint®2006 = 57.7

SPECint_base2006 = 54.2

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: May-2012
Hardware Availability: May-2012
Software Availability: Dec-2011

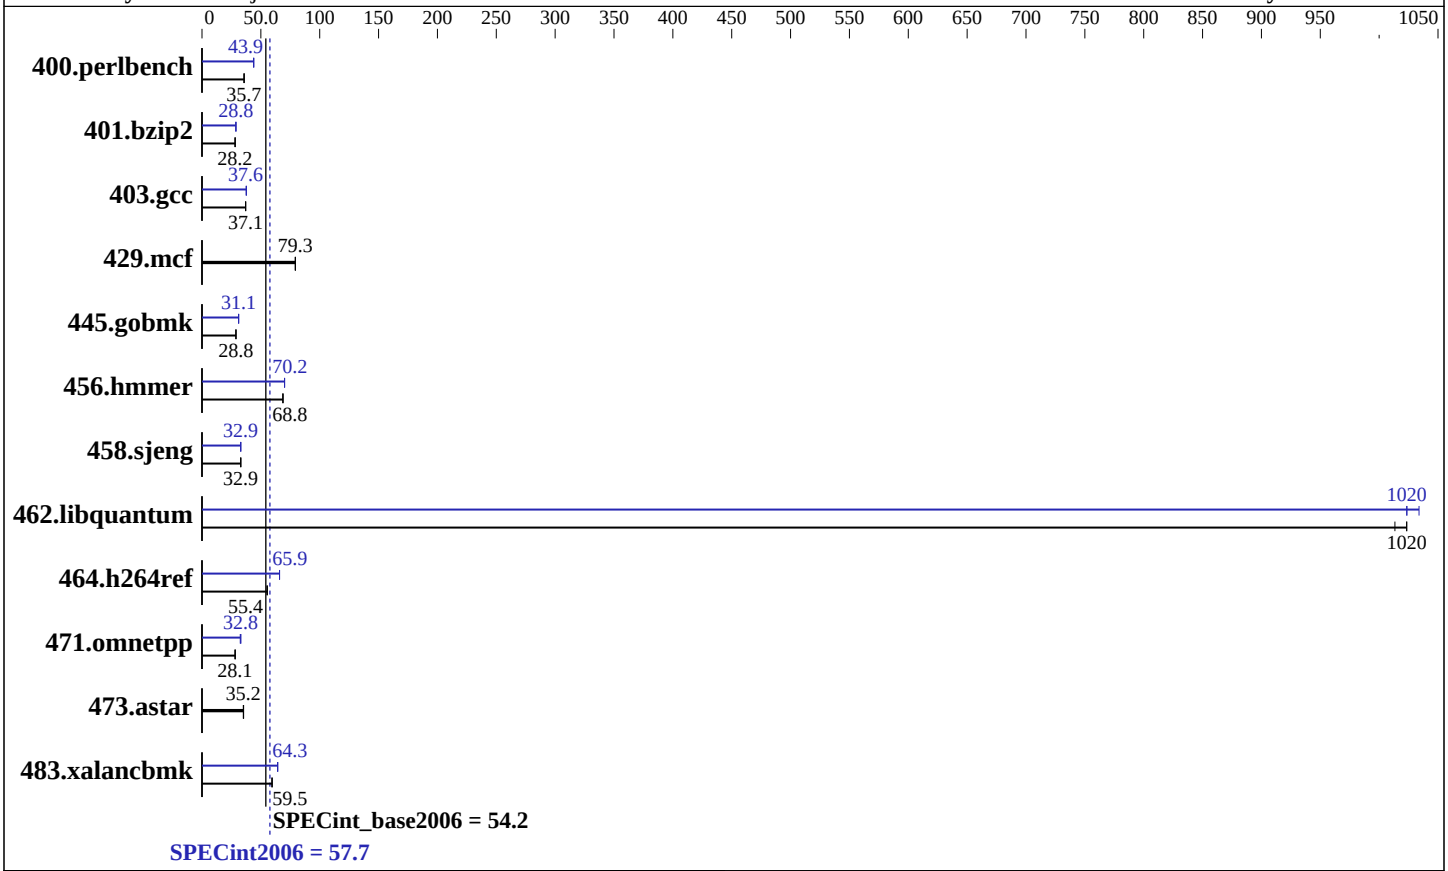

Hardware

CPU Name:	Intel Xeon E3-1280 v2
CPU Characteristics:	Intel Turbo Boost Technology up to 4.00 GHz
CPU MHz:	3600
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	8 MB I+D on chip per chip
Other Cache:	None
Memory:	16 GB (2 x 8 GB 2Rx8 PC3-12800E-11, ECC)
Disk Subsystem:	1 x SATA III, 500 GB, 7200 rpm
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.2, 2.6.32-220.el6.x86_64
Compiler:	C/C++: Version 12.1.3.293 of Intel C++ Studio XE for Linux
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run level 3 (multi - user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap 10 (Multi-Core)

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

CELSIUS W520 (Intel Xeon E3-1280 v2)

SPECint2006 = 57.7

SPECint_base2006 = 54.2

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: May-2012
Hardware Availability: May-2012
Software Availability: Dec-2011

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	272	35.9	274	35.7	**273**	**35.7**	**223**	**43.9**	222	43.9	223	43.9
401.bzip2	343	28.1	343	28.2	**343**	**28.2**	335	28.8	**335**	**28.8**	335	28.8
403.gcc	217	37.0	217	37.1	**217**	**37.1**	214	37.7	214	37.6	**214**	**37.6**
429.mcf	115	79.4	115	79.2	**115**	**79.3**	115	79.4	115	79.2	**115**	**79.3**
445.gobmk	**364**	**28.8**	363	28.9	364	28.8	337	31.1	**337**	**31.1**	337	31.1
456.hmmer	136	68.8	136	68.7	**136**	**68.8**	**133**	**70.2**	133	70.1	133	70.2
458.sjeng	367	32.9	**368**	**32.9**	368	32.9	368	32.9	368	32.9	**368**	**32.9**
462.libquantum	**20.2**	**1020**	20.4	1010	20.2	1020	20.0	1030	**20.2**	**1020**	20.2	1020
464.h264ref	400	55.3	399	55.5	**399**	**55.4**	336	65.9	336	65.9	**336**	**65.9**
471.omnetpp	221	28.2	222	28.1	**222**	**28.1**	192	32.5	**190**	**32.8**	189	33.0
473.astar	**199**	**35.2**	200	35.1	198	35.4	**199**	**35.2**	200	35.1	198	35.4
483.xalancbmk	116	59.6	**116**	**59.5**	116	59.4	107	64.3	**107**	**64.3**	108	64.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/work/cpu2006/libs/32:/work/cpu2006/libs/64"
OMP_NUM_THREADS = "4"

 Binaries were compiled on a system with
 2 x E5-2650 CPU + 96 GB memory using RHEL 6.2.

 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Base Compiler Invocation

C benchmarks:

```
icc  -m64
```

C++ benchmarks:

```
icpc -m64
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
445.gobmk: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
471.omnetpp: `-DSPEC_CPU_LP64`
473.astar: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32`

C++ benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32`
`-Wl,-z,muldefs -L/opt/SmartHeap/lib64 -lsmartheap64`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m64`

400.perlbench: `icc -m32`

445.gobmk: `icc -m32`

464.h264ref: `icc -m32`

C++ benchmarks (except as noted below):
`icpc -m32`

473.astar: `icpc -m64`

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32 -opt-prefetch -ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div -inline-calloc -opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32 -ansi-alias

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4

462.libquantum: -xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-ra-region-strategy=block -ansi-alias

Continued on next page

Peak Optimization Flags (Continued)

471.omnetpp (continued):
`-Wl,-z,muldefs -L/opt/SmartHeap/lib -lsmartheap`

473.astar: `basepeak = yes`

483.xalancbmk: `-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias -Wl,-z,muldefs -L/opt/SmartHeap/lib -lsmartheap`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html
http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120313.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml
http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120313.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 09:45:30 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 July 2012.