



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Huawei**

**SPECfp®2006 = 70.5**

**Huawei BH621 V2 (Intel Xeon E5-2440)**

**SPECfp\_base2006 = 67.8**

**CPU2006 license:** 3175


**Test date:** Jun-2012

**Test sponsor:** Huawei

**Hardware Availability:** May-2012

**Tested by:** Huawei

**Software Availability:** Dec-2011

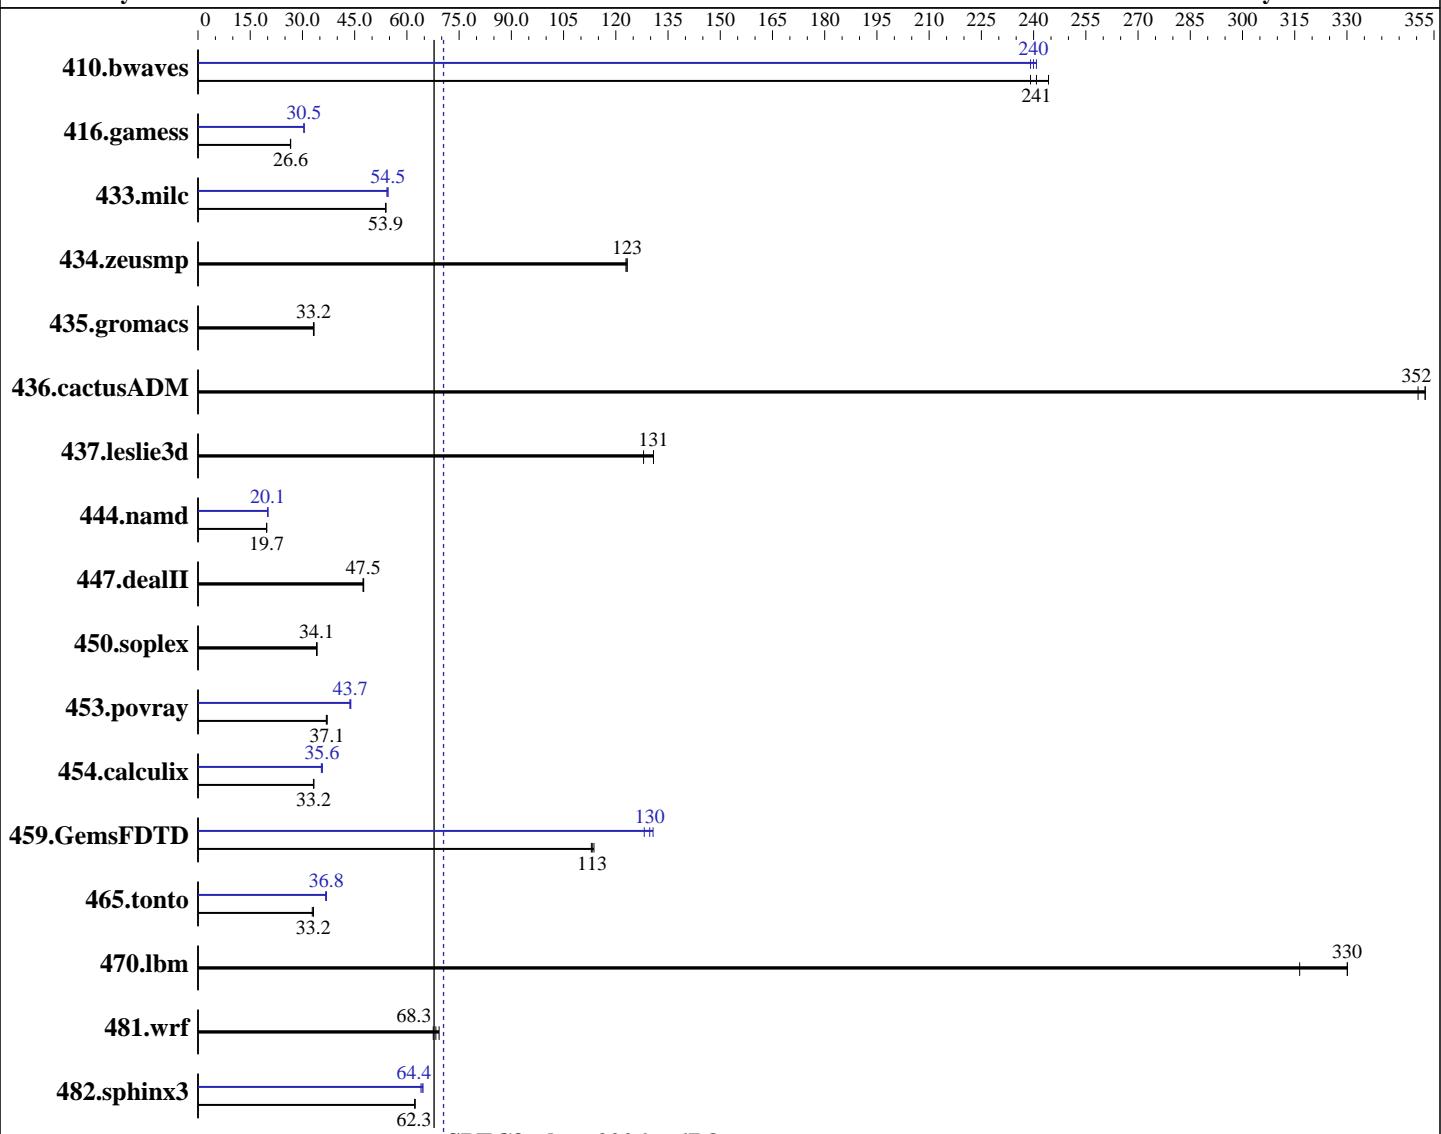

## Hardware

CPU Name: Intel Xeon E5-2440  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

*Continued on next page*

## Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 Compiler: 2.6.32-220.el6.x86\_64  
 Auto Parallel: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 File System: Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 ext4

*Continued on next page*



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Huawei**

**SPECfp2006 = 70.5**

**Huawei BH621 V2 (Intel Xeon E5-2440)**

**SPECfp\_base2006 = 67.8**

**CPU2006 license:** 3175

**Test date:** Jun-2012

**Test sponsor:** Huawei

**Hardware Availability:** May-2012

**Tested by:** Huawei

**Software Availability:** Dec-2011

L3 Cache: 15 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 96 GB (12 x 8 GB 1Rx4 PC3-10600R-9, ECC)  
 Disk Subsystem: 1 x 300 GB SAS, 10K RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	55.6	244	<b>56.4</b>	<b>241</b>	56.8	239	<b>56.4</b>	<b>241</b>	<b>56.6</b>	<b>240</b>	56.8	239
416.gamess	<b>736</b>	<b>26.6</b>	738	26.5	736	26.6	<b>643</b>	<b>30.5</b>	643	30.4	643	30.5
433.milc	170	53.9	<b>170</b>	<b>53.9</b>	170	53.9	<b>168</b>	<b>54.5</b>	168	54.6	169	54.3
434.zeusmp	73.8	123	74.0	123	<b>73.8</b>	<b>123</b>	73.8	123	74.0	123	<b>73.8</b>	<b>123</b>
435.gromacs	<b>215</b>	<b>33.2</b>	214	33.3	215	33.2	<b>215</b>	<b>33.2</b>	214	33.3	215	33.2
436.cactusADM	<b>33.9</b>	<b>352</b>	33.9	352	34.1	350	<b>33.9</b>	<b>352</b>	33.9	352	34.1	350
437.leslie3d	<b>71.9</b>	<b>131</b>	73.5	128	71.8	131	<b>71.9</b>	<b>131</b>	73.5	128	71.8	131
444.namd	407	19.7	407	19.7	<b>407</b>	<b>19.7</b>	<b>400</b>	<b>20.1</b>	400	20.1	400	20.1
447.dealII	<b>241</b>	<b>47.5</b>	241	47.4	240	47.6	<b>241</b>	<b>47.5</b>	241	47.4	240	47.6
450.soplex	<b>245</b>	<b>34.1</b>	244	34.2	245	34.0	<b>245</b>	<b>34.1</b>	244	34.2	245	34.0
453.povray	144	37.1	144	36.9	<b>144</b>	<b>37.1</b>	122	43.6	121	43.9	<b>122</b>	<b>43.7</b>
454.calculix	248	33.3	249	33.2	<b>248</b>	<b>33.2</b>	231	35.7	<b>232</b>	<b>35.6</b>	233	35.4
459.GemsFDTD	<b>93.7</b>	<b>113</b>	93.3	114	93.9	113	82.8	128	<b>81.8</b>	<b>130</b>	81.2	131
465.tonto	<b>297</b>	<b>33.2</b>	300	32.8	297	33.2	<b>267</b>	<b>36.8</b>	268	36.7	267	36.9
470.lbm	<b>41.6</b>	<b>330</b>	41.6	330	43.4	316	<b>41.6</b>	<b>330</b>	41.6	330	43.4	316
481.wrf	165	67.6	<b>164</b>	<b>68.3</b>	161	69.2	165	67.6	<b>164</b>	<b>68.3</b>	161	69.2
482.sphinx3	<b>313</b>	<b>62.3</b>	313	62.2	313	62.4	<b>302</b>	<b>64.6</b>	304	64.0	<b>303</b>	<b>64.4</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Select only test related files when installing the operating system

## Platform Notes

BIOS configuration:

Intel Hyper-Threading set to Disabled

Set Power Efficiency Mode to Performance

Sysinfo program /spec/config/sysinfo.rev6800

\$Rev: 6800 \$ \$Date::: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3

running on BH622-RH6.2 Tue Jun 19 04:33:14 2012

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECfp2006 = 70.5**

Huawei BH621 V2 (Intel Xeon E5-2440)

**SPECfp\_base2006 = 67.8**

CPU2006 license: 3175

Test date: Jun-2012

Test sponsor: Huawei

Hardware Availability: May-2012

Tested by: Huawei

Software Availability: Dec-2011

## Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2440 0 @ 2.40GHz
        2 "physical id"s (chips)
        12 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 6
    siblings   : 6
    physical 0: cores 0 1 2 3 4 5
    physical 1: cores 0 1 2 3 4 5
    cache size : 15360 KB
```

```
From /proc/meminfo
MemTotal:      99043568 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux BH622-RH6.2 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Jun 18 21:35

```
SPEC is set to: /spec
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda1        ext4     197G   23G  165G  13%  /
```

Additional information from dmidecode:

```
Memory:
12x Samsu M393B 8 GB 1333 MHz 1 rank
```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

```
KMP_AFFINITY = "granularity=fine,compact,0,1"
LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64"
OMP_NUM_THREADS = "12"
```

Binaries compiled on a system with 2 x Xeon X5645 CPU + 16GB memory

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei	<b>SPECfp2006 =</b>	<b>70.5</b>
Huawei BH621 V2 (Intel Xeon E5-2440)	<b>SPECfp_base2006 =</b>	<b>67.8</b>
<b>CPU2006 license:</b> 3175	<b>Test date:</b>	Jun-2012
<b>Test sponsor:</b> Huawei	<b>Hardware Availability:</b>	May-2012
<b>Tested by:</b> Huawei	<b>Software Availability:</b>	Dec-2011

## General Notes (Continued)

using RHEL 6.1

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECfp2006 = 70.5**

Huawei BH621 V2 (Intel Xeon E5-2440)

**SPECfp\_base2006 = 67.8**

CPU2006 license: 3175

Test date: Jun-2012

Test sponsor: Huawei

Hardware Availability: May-2012

Tested by: Huawei

Software Availability: Dec-2011

## Base Optimization Flags (Continued)

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll12 -ansi-alias  
-parallel

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 70.5

Huawei BH621 V2 (Intel Xeon E5-2440)

SPECfp\_base2006 = 67.8

CPU2006 license: 3175

Test date: Jun-2012

Test sponsor: Huawei

Hardware Availability: May-2012

Tested by: Huawei

Software Availability: Dec-2011

## Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>  
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20120703.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>  
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20120703.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei BH621 V2 (Intel Xeon E5-2440)

**SPECfp2006 = 70.5**

**SPECfp\_base2006 = 67.8**

**CPU2006 license:** 3175

**Test sponsor:** Huawei

**Tested by:** Huawei

**Test date:** Jun-2012

**Hardware Availability:** May-2012

**Software Availability:** Dec-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 10:09:38 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 25 July 2012.