



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM BladeCenter HS23  
(Intel Xeon E5-2643, 3.30 GHz)

**SPECfp®2006 = 83.7**

**SPECfp\_base2006 = 80.7**

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

**Test date:** Jun-2012

**Hardware Availability:** Apr-2012

**Software Availability:** Dec-2011

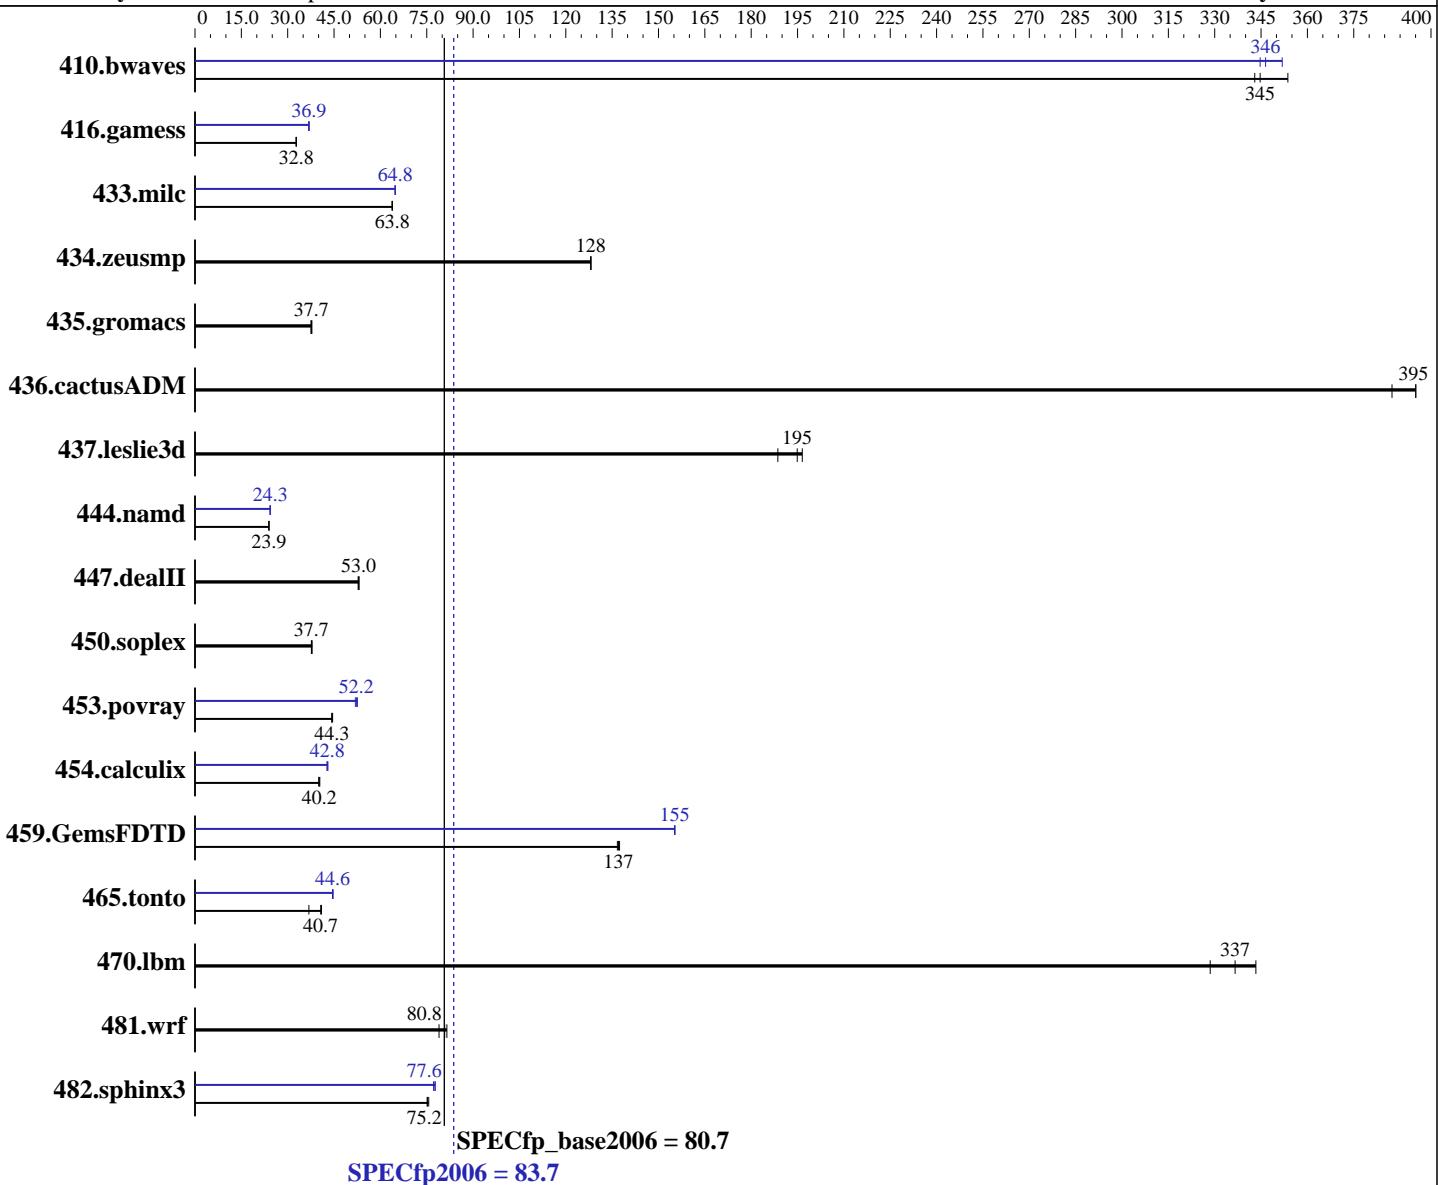

### Hardware

CPU Name: Intel Xeon E5-2643  
CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz  
CPU MHz: 3300  
FPU: Integrated  
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
Compiler: 2.6.32-220.el6.x86\_64  
C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
Auto Parallel: Yes  
File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM BladeCenter HS23  
(Intel Xeon E5-2643, 3.30 GHz)

**SPECfp2006 = 83.7**

**SPECfp\_base2006 = 80.7**

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jun-2012

Hardware Availability: Apr-2012

Software Availability: Dec-2011

L3 Cache: 10 MB I+D on chip per chip  
Other Cache: None  
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
Disk Subsystem: 1 x 300 GB SAS, 10000 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	39.6	343	<b>39.4</b>	<b>345</b>	38.4	354	<b>39.2</b>	<b>346</b>	38.6	352	39.4	345
416.gamess	597	32.8	598	32.7	<b>597</b>	<b>32.8</b>	532	36.8	531	36.9	<b>531</b>	<b>36.9</b>
433.milc	<b>144</b>	<b>63.8</b>	144	63.8	144	63.9	<b>142</b>	<b>64.8</b>	142	64.8	142	64.8
434.zeusmp	<b>71.0</b>	<b>128</b>	71.0	128	71.0	128	<b>71.0</b>	<b>128</b>	71.0	128	71.0	128
435.gromacs	<b>190</b>	<b>37.7</b>	190	37.5	189	37.8	<b>190</b>	<b>37.7</b>	190	37.5	189	37.8
436.cactusADM	30.8	387	30.2	395	<b>30.2</b>	<b>395</b>	30.8	387	30.2	395	<b>30.2</b>	<b>395</b>
437.leslie3d	49.8	189	47.8	197	<b>48.2</b>	<b>195</b>	49.8	189	47.8	197	<b>48.2</b>	<b>195</b>
444.namd	335	23.9	<b>335</b>	<b>23.9</b>	335	23.9	330	24.3	<b>330</b>	<b>24.3</b>	330	24.3
447.dealII	215	53.1	<b>216</b>	<b>53.0</b>	217	52.8	<b>215</b>	<b>53.1</b>	<b>216</b>	<b>53.0</b>	217	52.8
450.soplex	220	37.9	<b>221</b>	<b>37.7</b>	221	37.7	<b>220</b>	<b>37.9</b>	<b>221</b>	<b>37.7</b>	221	37.7
453.povray	<b>120</b>	<b>44.3</b>	119	44.5	120	44.3	103	51.9	<b>102</b>	<b>52.2</b>	101	52.6
454.calculix	204	40.4	206	40.0	<b>205</b>	<b>40.2</b>	<b>193</b>	<b>42.8</b>	193	42.7	192	43.0
459.GemsFDTD	77.2	137	77.6	137	<b>77.4</b>	<b>137</b>	<b>68.3</b>	<b>155</b>	68.3	155	68.3	155
465.tonto	<b>242</b>	<b>40.7</b>	240	40.9	267	36.9	221	44.5	<b>221</b>	<b>44.6</b>	220	44.7
470.lbm	41.8	329	<b>40.8</b>	<b>337</b>	40.0	343	41.8	329	<b>40.8</b>	<b>337</b>	40.0	343
481.wrf	141	79.0	<b>138</b>	<b>80.8</b>	137	81.5	141	79.0	<b>138</b>	<b>80.8</b>	137	81.5
482.sphinx3	<b>259</b>	<b>75.2</b>	259	75.2	258	75.6	<b>252</b>	<b>77.2</b>	<b>251</b>	<b>77.6</b>	251	77.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Operating Mode set to Maximum Performance in BIOS  
Sysinfo program /cpu2006.1.2/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date::: 2011-10-11 #\\$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on tigershark-pete Fri Jun 8 23:41:48 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM BladeCenter HS23  
(Intel Xeon E5-2643, 3.30 GHz)

**SPECfp2006 = 83.7**

**SPECfp\_base2006 = 80.7**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Jun-2012

**Hardware Availability:** Apr-2012

**Software Availability:** Dec-2011

## Platform Notes (Continued)

```
model name : Intel(R) Xeon(R) CPU E5-2643 0 @ 3.30GHz
  2 "physical id"s (chips)
  16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 4
  siblings   : 8
  physical 0: cores 0 1 2 3
  physical 1: cores 0 1 2 3
cache size : 10240 KB

From /proc/meminfo
MemTotal:      132137720 kB
HugePages_Total:       0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
  Red Hat Enterprise Linux Server release 6.2 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
  Linux tigershark-pete 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST
  2011 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jun 7 16:26

SPEC is set to: /cpu2006.1.2
  Filesystem  Type  Size  Used Avail Use% Mounted on
  /dev/mapper/vg_tigersharkpet-lv_root
    ext4      265G  6.0G  246G   3%  /

Additional information from dmidecode:
Memory:
  15x Micron 36JDYS1G72PZ-1G6M1 8 GB 1600 MHz 2 rank
  1x Samsung M392B1K70DM0-CK0 8 GB 1600 MHz 2 rank

(End of data from sysinfo program)
```

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/cpu2006.1.2/ libs/32:/cpu2006.1.2/ libs/64"

OMP\_NUM\_THREADS = "8"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM BladeCenter HS23  
(Intel Xeon E5-2643, 3.30 GHz)

**SPECfp2006 = 83.7**

**SPECfp\_base2006 = 80.7**

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jun-2012

Hardware Availability: Apr-2012

Software Availability: Dec-2011

## General Notes (Continued)

memory using RHEL5.5

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
        433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
        444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
        470.lbm: -DSPEC_CPU_LP64
        481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM BladeCenter HS23  
(Intel Xeon E5-2643, 3.30 GHz)

**SPECfp2006 = 83.7**

**SPECfp\_base2006 = 80.7**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Jun-2012

**Hardware Availability:** Apr-2012

**Software Availability:** Dec-2011

## Base Optimization Flags (Continued)

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll12 -ansi-alias  
-parallel

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM BladeCenter HS23  
(Intel Xeon E5-2643, 3.30 GHz)

**SPECfp2006 = 83.7**

**SPECfp\_base2006 = 80.7**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Jun-2012

**Hardware Availability:** Apr-2012

**Software Availability:** Dec-2011

## Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM BladeCenter HS23  
(Intel Xeon E5-2643, 3.30 GHz)

**SPECfp2006 = 83.7**

**SPECfp\_base2006 = 80.7**

**CPU2006 license:** 11

**Test date:** Jun-2012

**Test sponsor:** IBM Corporation

**Hardware Availability:** Apr-2012

**Tested by:** IBM Corporation

**Software Availability:** Dec-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 11:36:40 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 31 July 2012.