SPEC® CINT2006 Result

Huawei

Huawei RH2285 V2 (Intel Xeon E5-2450L)

SPECint®_rate2006 = 442

SPECint_rate_base2006 = 426

CPU2006 license:	3175	**Test date:**	Jul-2012
Test sponsor:	Huawei	**Hardware Availability:**	May-2012
Tested by:	Huawei	**Software Availability:**	Dec-2011

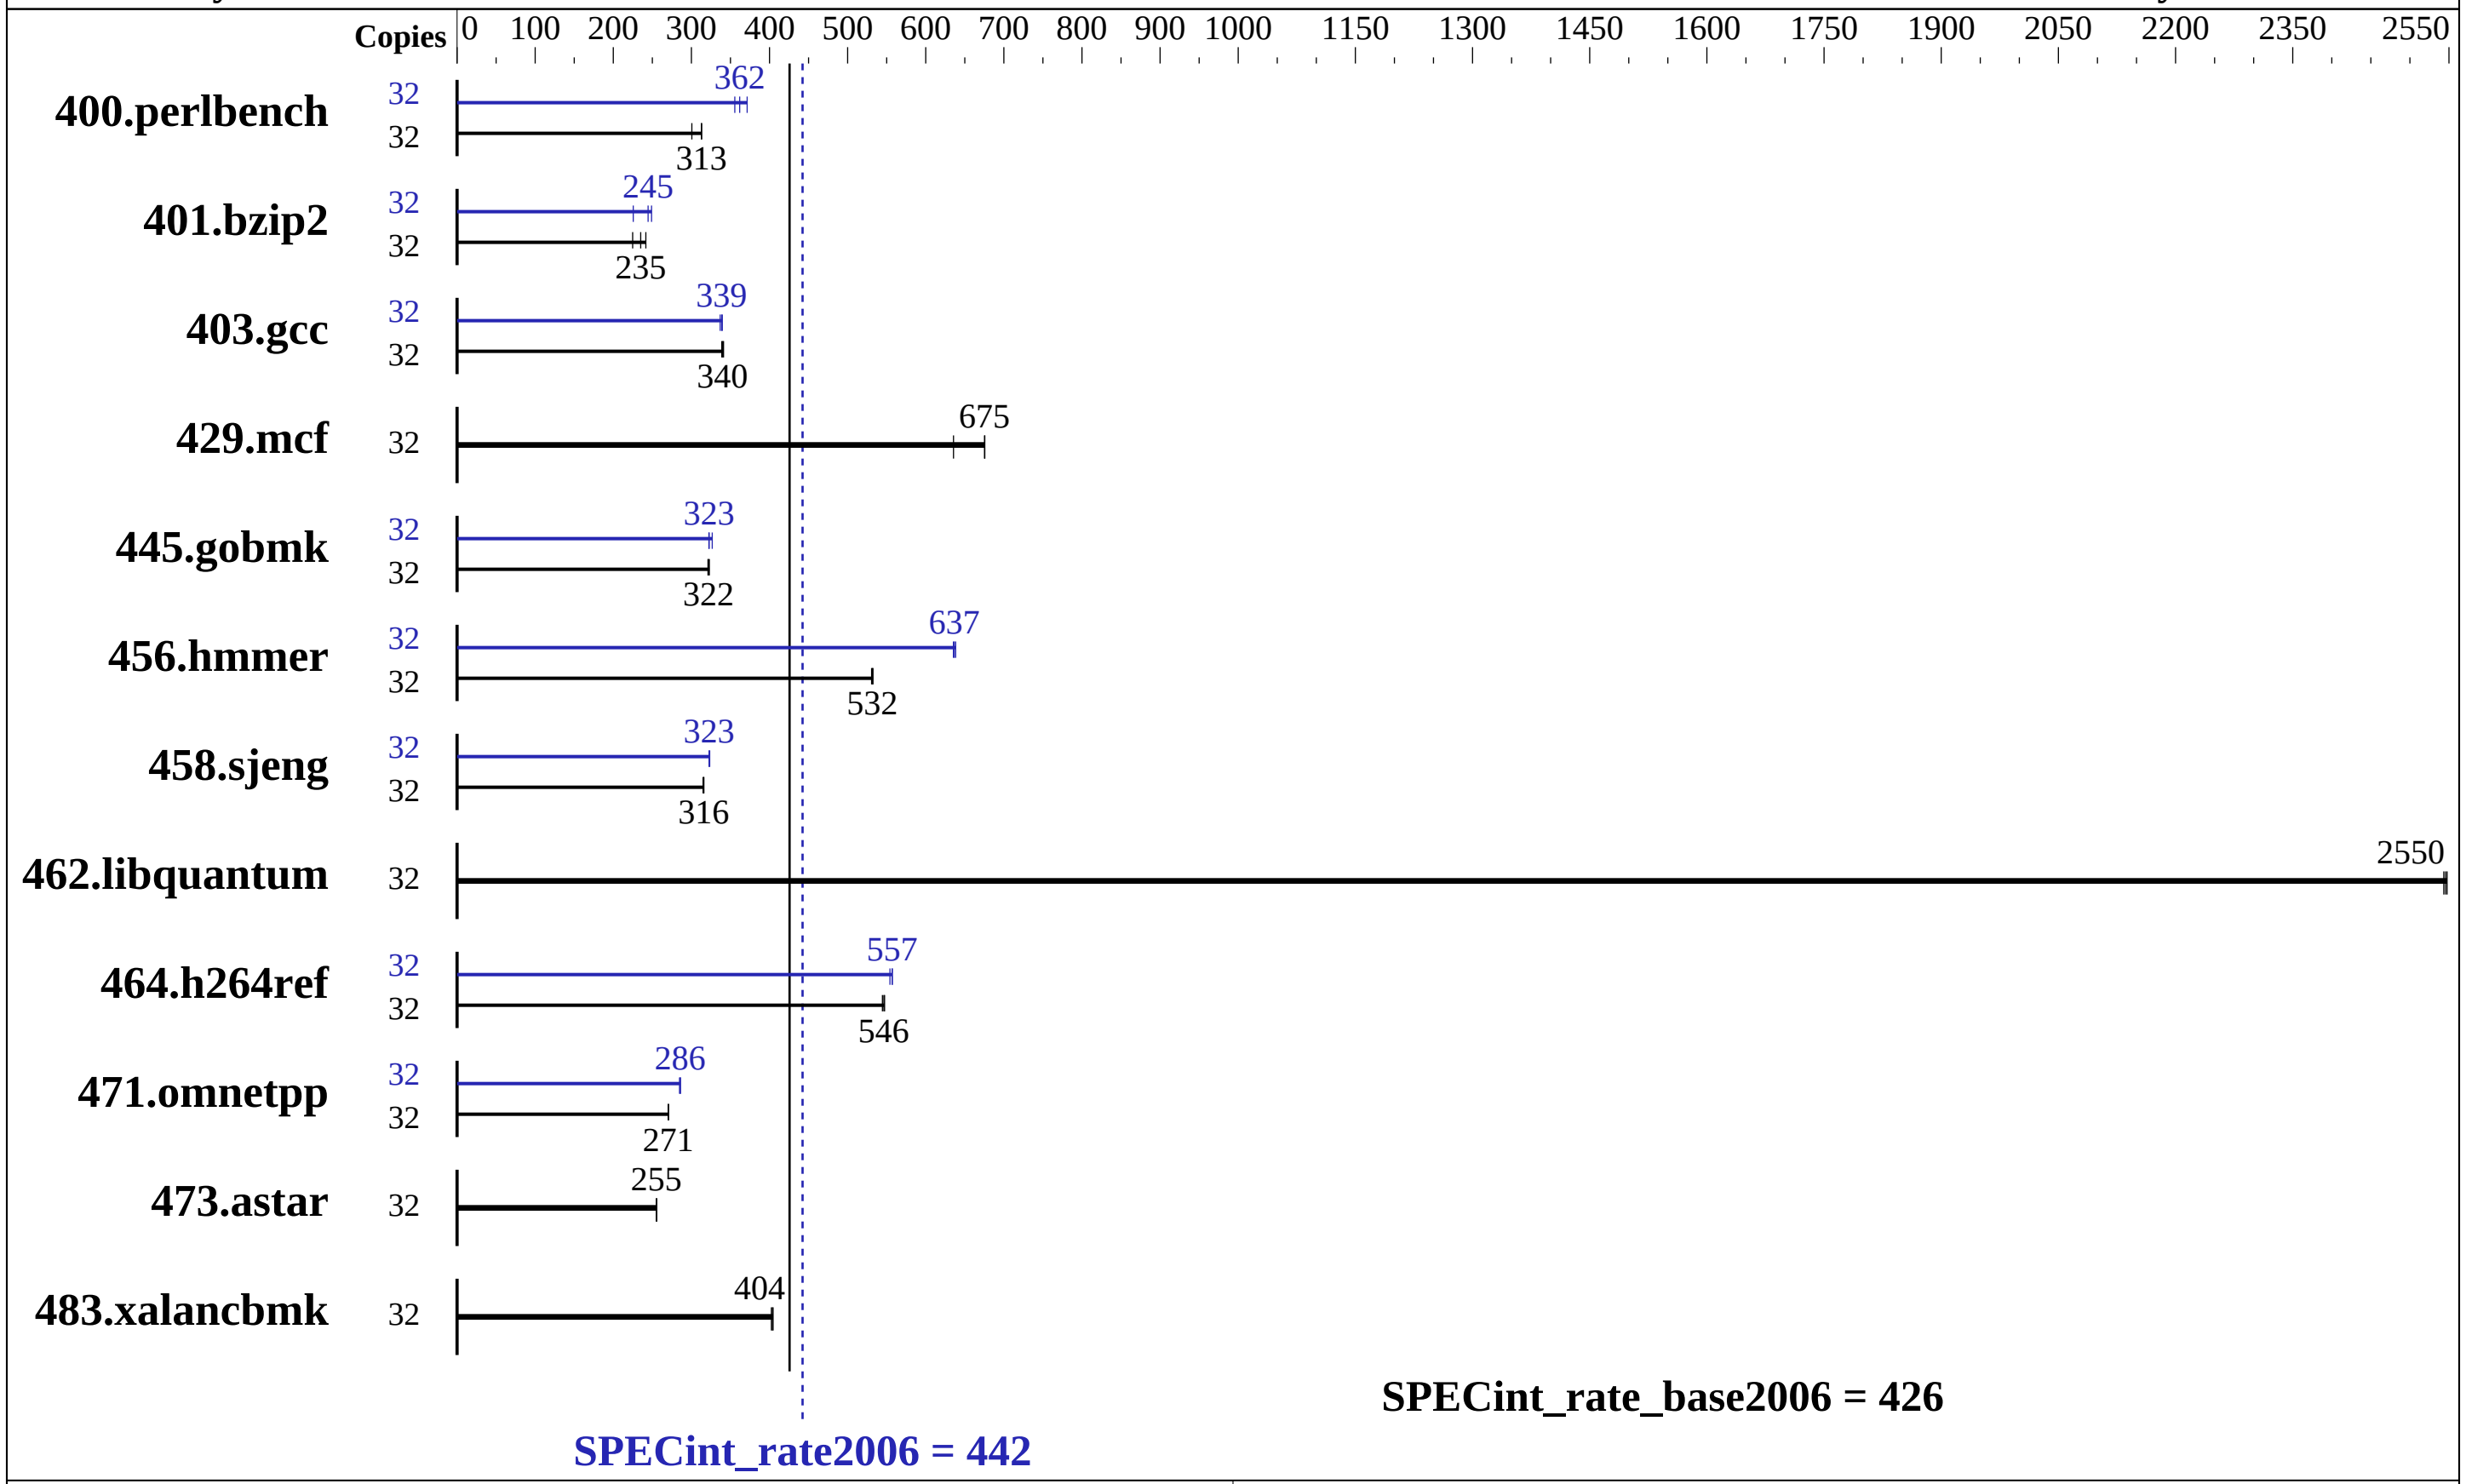

Hardware

CPU Name:	Intel Xeon E5-2450L
CPU Characteristics:	Intel Turbo Boost Technology up to 2.30 GHz
CPU MHz:	1800
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	20 MB I+D on chip per chip
Other Cache:	None
Memory:	96 GB (12 x 8 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem:	1 x 300 GB SAS, 10K RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.2 (Santiago) 2.6.32-220.el6.x86_64
Compiler:	C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V9.01

Results Table

	Base							Peak						
Benchmark	**Copies**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Copies**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**
400.perlbench	32	**999**	**313**	1040	301	999	313	32	879	356	842	371	**864**	**362**
401.bzip2	32	**1314**	**235**	1374	225	1278	242	32	1369	226	1240	249	**1263**	**245**
403.gcc	32	**758**	**340**	755	341	760	339	32	759	340	765	337	**760**	**339**
429.mcf	32	459	636	432	676	**432**	**675**	32	459	636	432	676	**432**	**675**
445.gobmk	32	1045	321	**1043**	**322**	1039	323	32	1028	327	**1040**	**323**	1041	322
456.hmmer	32	**561**	**532**	563	531	561	532	32	470	635	**469**	**637**	468	638
458.sjeng	32	1229	315	**1226**	**316**	1226	316	32	1197	323	1200	323	**1200**	**323**
462.libquantum	32	261	2540	**260**	**2550**	260	2550	32	261	2540	**260**	**2550**	260	2550
464.h264ref	32	1294	547	1300	545	**1296**	**546**	32	**1271**	**557**	1278	554	1271	557
471.omnetpp	32	**739**	**271**	740	270	739	271	32	702	285	**700**	**286**	699	286
473.astar	32	**880**	**255**	880	255	879	256	32	**880**	**255**	880	255	879	256
483.xalancbmk	32	**547**	**404**	546	405	549	402	32	**547**	**404**	546	405	549	402

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1>       /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
Select only test related files when installing the operating system
```

Platform Notes

```
BIOS configuration:
Set Power Efficiency Mode to Performance
Baseboard Management Controller used to adjust the fan speed to 100%
Sysinfo program /spec/config/sysinfo.rev6800
$Rev: 6800 $ $Date:: 2011-10-11 #$ 6f2ebdff5032aaa42e583f96b07f99d3
running on DH310-2 Thu Jul 12 22:21:12 2012

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo
```

Continued on next page

Platform Notes (Continued)

```
 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2450L 0 @ 1.80GHz
       2 "physical id"s (chips)
       32 "processors"
    cores, siblings (Caution: counting these is hw and system dependent.  The
    following excerpts from /proc/cpuinfo might not be reliable.  Use with
    caution.)
       cpu cores : 8
       siblings  : 16
       physical 0: cores 0 1 2 3 4 5 6 7
       physical 1: cores 0 1 2 3 4 5 6 7
    cache size : 20480 KB

 From /proc/meminfo
    MemTotal:       99030424 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 From /etc/*release* /etc/*version*
    redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
    system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
    system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

 uname -a:
    Linux DH310-2 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011 x86_64
    x86_64 x86_64 GNU/Linux

 run-level 3 Jul 10 18:20

 SPEC is set to: /spec
    Filesystem    Type    Size  Used Avail Use% Mounted on
    /dev/sda1     ext4    289G  103G  171G  38% /

 Additional information from dmidecode:

 (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64"

 Binaries compiled on a system with 2 x Xeon X5645 CPU + 16GB memory
 using RHEL 6.1

 The Huawei RH2285 v2 and Huawei RH2285H v2 models are electronically equivalent.
 The results have been measured on a Huawei RH2285 v2 model.
```

Base Compiler Invocation

C benchmarks:
`icc -m32`

C++ benchmarks:
`icpc -m32`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`

C++ benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`
`-Wl,-z,muldefs -L/smartheap -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m32`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:
`icpc -m32`

Huawei

Huawei RH2285 V2 (Intel Xeon E5-2450L)

SPECint_rate2006 = 442

SPECint_rate_base2006 = 426

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Jul-2012
Hardware Availability: May-2012
Software Availability: Dec-2011

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/smartheap -lsmartheap

473.astar: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html
http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20120703.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml
http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20120703.xml

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 12:07:46 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 14 August 2012.