



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Dell Inc.

### SPECfp<sup>®</sup>\_rate2006 = 826

### PowerEdge M915 (AMD Opteron 6284 SE, 2.70 GHz)

### SPECfp\_rate\_base2006 = 757

CPU2006 license: 55


Test date: Aug-2012

Test sponsor: Dell Inc.

Hardware Availability: Jul-2012

Tested by: Dell Inc.

Software Availability: Jun-2012

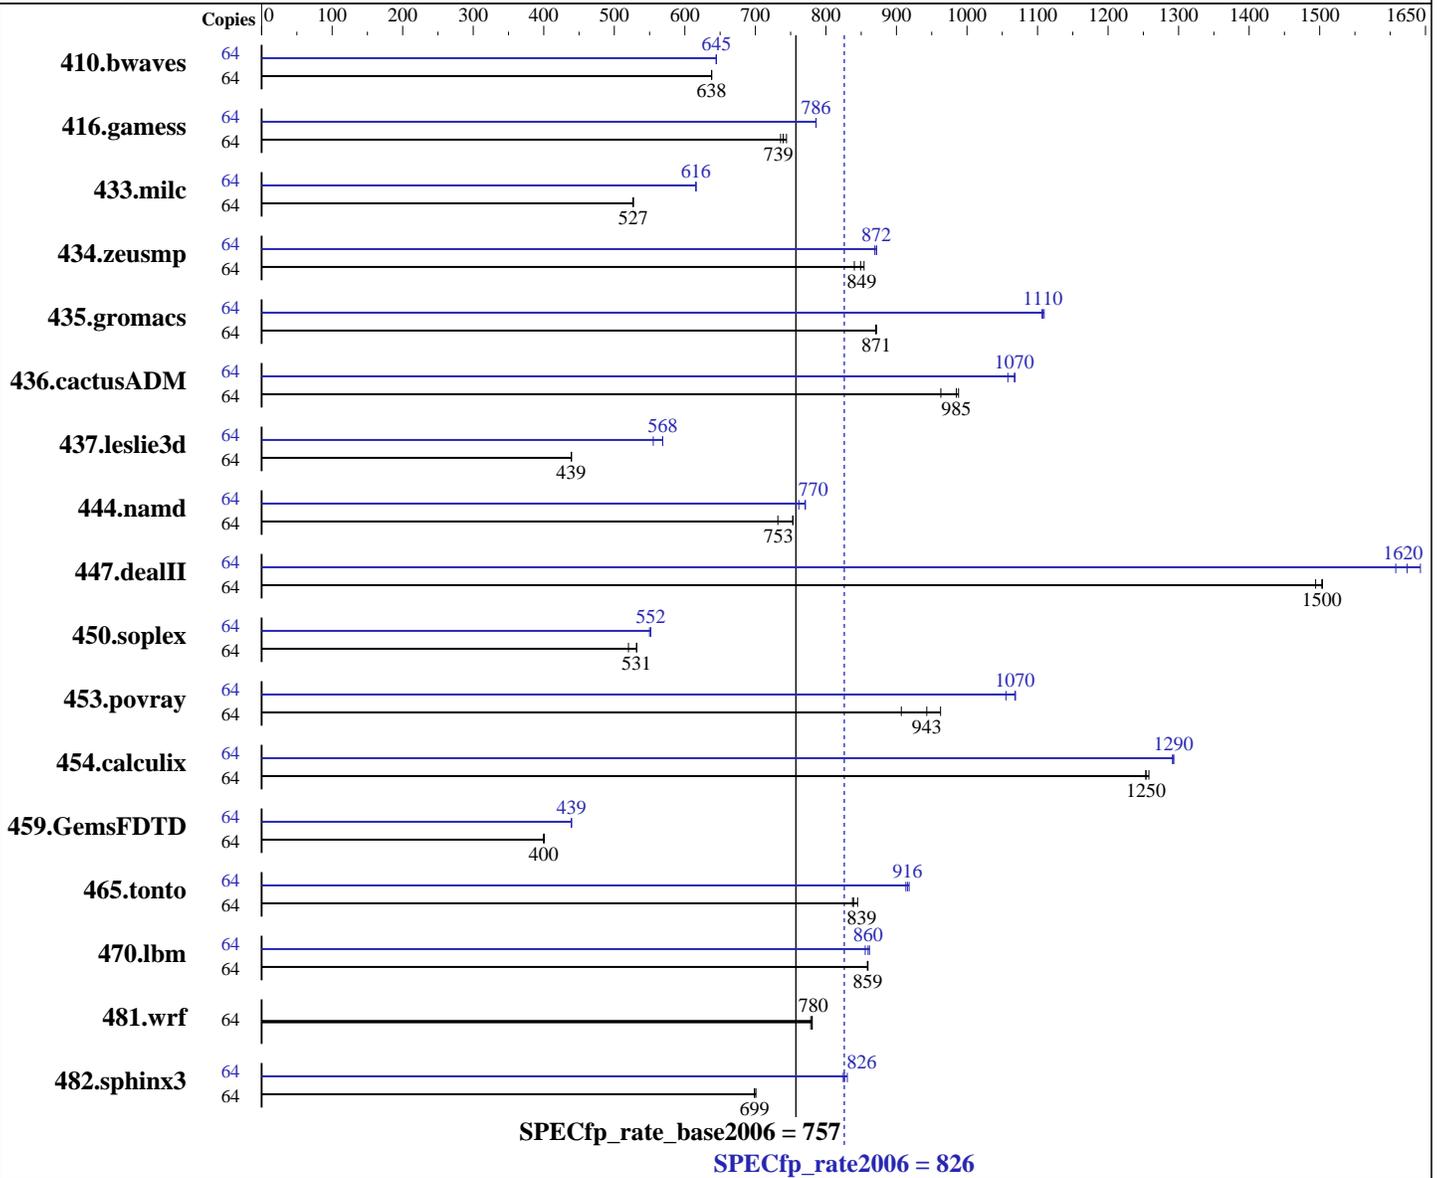

### Hardware

CPU Name: AMD Opteron 6284 SE  
 CPU Characteristics: AMD Turbo CORE technology up to 3.40 GHz  
 CPU MHz: 2700  
 FPU: Integrated  
 CPU(s) enabled: 64 cores, 4 chips, 16 cores/chip  
 CPU(s) orderable: 2,4 chips

### Software

Operating System: Red Hat Enterprise Linux Server release 6.3  
 Kernel 2.6.32-279.el6.x86\_64  
 Compiler: C/C++/Fortran: Version 4.5.1 of x86 Open64 Compiler Suite (from AMD)  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 826

PowerEdge M915 (AMD Opteron 6284 SE, 2.70 GHz)

SPECfp\_rate\_base2006 = 757

CPU2006 license: 55

Test date: Aug-2012

Test sponsor: Dell Inc.

Hardware Availability: Jul-2012

Tested by: Dell Inc.

Software Availability: Jun-2012

Primary Cache: 512 KB I on chip per chip,  
64 KB I shared / 2 cores;  
16 KB D on chip per core

Secondary Cache: 16 MB I+D on chip per chip, 2 MB shared / 2 cores

L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 8 cores

Other Cache: None

Memory: 256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC)

Disk Subsystem: 1 x 300 GB SAS, 15000 RPM

Other Hardware: None

Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	64	1364	638	1363	638	<b><u>1363</u></b>	<b><u>638</u></b>	64	1350	644	1349	645	<b><u>1349</u></b>	<b><u>645</u></b>
416.gamess	64	1684	744	1703	736	<b><u>1695</u></b>	<b><u>739</u></b>	64	1595	786	<b><u>1594</u></b>	<b><u>786</u></b>	1594	786
433.milc	64	1115	527	1116	527	<b><u>1115</u></b>	<b><u>527</u></b>	64	954	616	954	616	<b><u>954</u></b>	<b><u>616</u></b>
434.zeusmp	64	693	840	682	854	<b><u>686</u></b>	<b><u>849</u></b>	64	668	872	670	869	<b><u>668</u></b>	<b><u>872</u></b>
435.gromacs	64	<b><u>524</u></b>	<b><u>871</u></b>	524	871	525	871	64	412	1110	413	1110	<b><u>413</u></b>	<b><u>1110</u></b>
436.cactusADM	64	794	963	<b><u>777</u></b>	<b><u>985</u></b>	774	988	64	<b><u>717</u></b>	<b><u>1070</u></b>	723	1060	716	1070
437.leslie3d	64	1370	439	<b><u>1370</u></b>	<b><u>439</u></b>	1370	439	64	1058	569	<b><u>1058</u></b>	<b><u>568</u></b>	1084	555
444.namd	64	681	753	701	732	<b><u>682</u></b>	<b><u>753</u></b>	64	674	762	<b><u>666</u></b>	<b><u>770</u></b>	666	771
447.dealII	64	490	1490	<b><u>487</u></b>	<b><u>1500</u></b>	487	1500	64	<b><u>451</u></b>	<b><u>1620</u></b>	446	1640	455	1610
450.soplex	64	1026	520	<b><u>1004</u></b>	<b><u>531</u></b>	1004	532	64	971	550	<b><u>967</u></b>	<b><u>552</u></b>	967	552
453.povray	64	375	907	354	963	<b><u>361</u></b>	<b><u>943</u></b>	64	319	1070	<b><u>319</u></b>	<b><u>1070</u></b>	323	1060
454.calculix	64	<b><u>421</u></b>	<b><u>1250</u></b>	421	1250	420	1260	64	<b><u>408</u></b>	<b><u>1290</u></b>	408	1290	409	1290
459.GemsFDTD	64	1695	401	<b><u>1698</u></b>	<b><u>400</u></b>	1699	400	64	1547	439	1545	439	<b><u>1546</u></b>	<b><u>439</u></b>
465.tonto	64	<b><u>750</u></b>	<b><u>839</u></b>	752	838	745	845	64	<b><u>688</u></b>	<b><u>916</u></b>	690	913	686	918
470.lbm	64	1024	859	1023	860	<b><u>1023</u></b>	<b><u>859</u></b>	64	1028	856	1020	862	<b><u>1023</u></b>	<b><u>860</u></b>
481.wrf	64	<b><u>916</u></b>	<b><u>780</u></b>	916	781	918	778	64	<b><u>916</u></b>	<b><u>780</u></b>	916	781	918	778
482.sphinx3	64	<b><u>1784</u></b>	<b><u>699</u></b>	1786	699	1780	701	64	<b><u>1510</u></b>	<b><u>826</u></b>	1513	824	1502	830

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent\_hugepage=never in run script.  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 826

PowerEdge M915 (AMD Opteron 6284 SE, 2.70 GHz)

SPECfp\_rate\_base2006 = 757

CPU2006 license: 55

Test date: Aug-2012

Test sponsor: Dell Inc.

Hardware Availability: Jul-2012

Tested by: Dell Inc.

Software Availability: Jun-2012

## Operating System Notes (Continued)

```
Set vm/nr_hugepages=57344 in run script.
mount -t hugetlbfs nodev /mnt/hugepages
```

## General Notes

Environment variables set by runspec before the start of the run:

HUGETLB\_LIMIT = "896"

LD\_LIBRARY\_PATH = "/root/cpu2006/amd1104-rate-libs-revC/32:/root/cpu2006/amd1104-rate-libs-revC/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6274 chips + 64GB Memory using RHEL 6.1

## Base Compiler Invocation

C benchmarks:

opencc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

opencc openf95

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 826

PowerEdge M915 (AMD Opteron 6284 SE, 2.70 GHz)

SPECfp\_rate\_base2006 = 757

CPU2006 license: 55

Test date: Aug-2012

Test sponsor: Dell Inc.

Hardware Availability: Jul-2012

Tested by: Dell Inc.

Software Availability: Jun-2012

## Base Portability Flags (Continued)

481.wrf: -DSPEC\_CPU\_LINUX -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LP64  
-fno-second-underscore  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-march=bdver1 -Ofast -OPT:malloc\_alg=1 -HP:bd=2m:heap=2m  
-IPA:plimit=8000 -IPA:small\_pu=100 -mso

C++ benchmarks:

-march=bdver1 -Ofast -static -CG:load\_exe=0 -OPT:malloc\_alg=1  
-INLINE:aggressive=on -HP:bd=2m:heap=2m -D\_\_OPEN64\_FAST\_SET

Fortran benchmarks:

-march=bdver1 -Ofast -LNO:blocking=off -OPT:rsqrt=2  
-OPT:unroll\_size=256 -HP:bd=2m:heap=2m -mso

Benchmarks using both Fortran and C:

-march=bdver1 -Ofast -OPT:malloc\_alg=1 -HP:bd=2m:heap=2m  
-IPA:plimit=8000 -IPA:small\_pu=100 -mso -LNO:blocking=off  
-OPT:rsqrt=2 -OPT:unroll\_size=256

## Peak Compiler Invocation

C benchmarks:

openc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

openc openf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 826

PowerEdge M915 (AMD Opteron 6284 SE, 2.70 GHz)

SPECfp\_rate\_base2006 = 757

CPU2006 license: 55

Test date: Aug-2012

Test sponsor: Dell Inc.

Hardware Availability: Jul-2012

Tested by: Dell Inc.

Software Availability: Jun-2012

## Peak Portability Flags (Continued)

```

435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
-fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -march=bdver1 -Ofast -CG:movnti=1 -CG:locs_best=on
-HP:bdt=2m:heap=2m -IPA:plimit=7000 -IPA:callee_limit=1200
-OPT:struct_array_copy=2 -OPT:alias=field_sensitive -mso

470.lbm: -march=bdver1 -Ofast -CG:cmp_peep=on
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -HP:bdt=2m:heap=2m
-IPA:plimit=8000 -IPA:small_pu=100 -mso

482.sphinx3: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -IPA:plimit=1000
-OPT:malloc_alg=2 -CG:cmp_peep=on -CG:local_sched_alg=2
-CG:p2align=0 -INLINE:aggressive=on -LNO:prefetch=2
-LNO:prefetch_ahead=4 -mso

```

C++ benchmarks:

```

444.namd: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -IPA:plimit=3000
-LNO:ignore_feedback=off -CG:local_sched_alg=2
-CG:load_exe=0 -OPT:unroll_size=256 -fno-exceptions
-HP:bdt=2m:heap=2m

447.dealIII: -march=bdver1 -Ofast -D__OPEN64_FAST_SET -static
-INLINE:aggressive=on -LNO:opt=0 -LNO:simd=0
-fno-emit-exceptions -m32 -OPT:unroll_times_max=8
-OPT:unroll_size=256 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m
-GRA:unspill=on -CG:cmp_peep=on -CG:movext_icmp=off
-TENV:frame_pointer=off

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 826

PowerEdge M915 (AMD Opteron 6284 SE, 2.70 GHz)

SPECfp\_rate\_base2006 = 757

CPU2006 license: 55

Test date: Aug-2012

Test sponsor: Dell Inc.

Hardware Availability: Jul-2012

Tested by: Dell Inc.

Software Availability: Jun-2012

## Peak Optimization Flags (Continued)

450.soplex: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O3 -LNO:ignore\_feedback=off  
 -INLINE:aggressive=on -OPT:RO=1 -OPT:IEEE\_arith=3  
 -OPT:IEEE\_NaN\_Inf=off -OPT:fold\_unsigned\_relops=on  
 -fno-exceptions -CG:p2align=0 -m32 -HP:bdt=2m:heap=2m  
 -WOPT:sib=on

453.povray: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -CG:pre\_local\_sched=off  
 -CG:p2align=0 -CG:p2align\_split=on -CG:dsched=on  
 -INLINE:aggressive=on -HP:bd=2m:heap=2m -OPT:transform=2  
 -OPT:alias=disjoint -WOPT:aggcm=0

### Fortran benchmarks:

410.bwaves: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -OPT:Ofast -OPT:treeheight=on  
 -LNO:blocking=off -LNO:ignore\_feedback=off -LNO:fu=4  
 -LNO:loop\_model\_simd=on -LNO:simd\_rm\_unity\_remainder=on  
 -WOPT:aggstr=0 -HP:bd=2m:heap=2m -CG:cmp\_peep=on

416.gamess: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0  
 -LNO:simd=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll\_size=256  
 -OPT:unroll\_times\_max=2 -CG:local\_sched\_alg=1  
 -HP:bd=2m:heap=2m -WOPT:sib=on

434.zeusmp: -march=bdver1 -Ofast -LNO:blocking=off -LNO:interchange=off  
 -IPA:plimit=1500 -HP:bd=2m:heap=2m

437.leslie3d: -march=bdver1 -Ofast -CG:pre\_minreg\_level=2 -LNO:simd=0  
 -LNO:fusion=2 -HP:bd=2m:heap=2m -mso

459.GemsFDTD: -march=bdver1 -Ofast -IPA:plimit=1500 -OPT:unroll\_size=0  
 -LNO:fission=2 -CG:load\_exe=0 -CG:local\_sched\_alg=2 -HP

465.tonto: -march=bdver1 -Ofast -OPT:alias=no\_f90\_pointer\_alias  
 -LNO:blocking=off -CG:load\_exe=1 -IPA:plimit=525  
 -HP:bd=2m:heap=2m

### Benchmarks using both Fortran and C:

435.gromacs: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -OPT:rsqrt=2  
 -HP:bd=2m:heap=2m -CG:local\_sched\_alg=2 -GRA:unspill=ON  
 -CG:load\_exe=3 -LNO:simd=3

436.cactusADM: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -LNO:blocking=off  
 -LNO:prefetch=2 -HP -CG:locs\_shallow\_depth=1 -CG:load\_exe=0  
 -CG:dsched=on -WOPT:sib=on

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 826

PowerEdge M915 (AMD Opteron 6284 SE, 2.70 GHz)

SPECfp\_rate\_base2006 = 757

CPU2006 license: 55

Test date: Aug-2012

Test sponsor: Dell Inc.

Hardware Availability: Jul-2012

Tested by: Dell Inc.

Software Availability: Jun-2012

## Peak Optimization Flags (Continued)

454.calculix: -march=bdver1 -Ofast -OPT:unroll\_size=256  
-GRA:optimize\_boundary=on -CG:dsched=on -HP:bdt=2m:heap=2m

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-451-flags-rate-revC.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/x86-open64-451-flags-rate-revC.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 11:03:52 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 29 August 2012.