SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec MX205 (Intel Xeon E5-2670)

SPECint®_rate2006 = 325

SPECint_rate_base2006 = 313

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Dec-2011
Hardware Availability: Jun-2012
Software Availability: Dec-2011

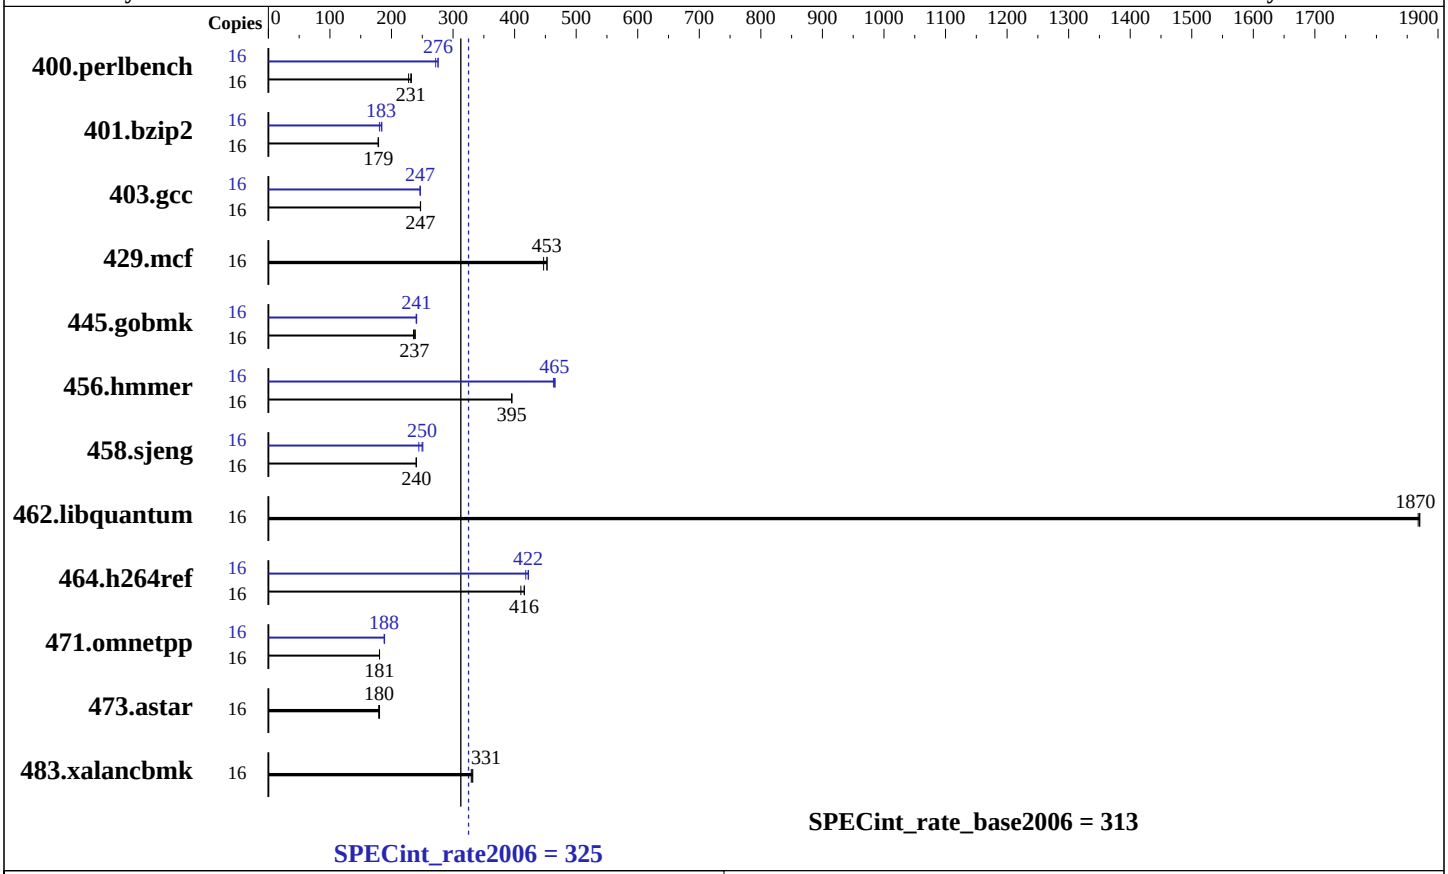

Hardware

CPU Name:	Intel Xeon E5-2670
CPU Characteristics:	Intel Turbo Boost Technology up to 3.30 GHz
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	8 cores, 1 chip, 8 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	20 MB I+D on chip per chip
Other Cache:	None
Memory:	32 GB (8 x 4 GB 1Rx4 PC3-12800R-11, ECC)
Disk Subsystem:	500 GB, SATA-2, 7200 RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server Release 6.2, 2.6.32-220.el6.x86_64
Compiler:	C/C++: Version 12.1.0 of Intel Compiler XE Build 20111011
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V8.1

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec MX205 (Intel Xeon E5-2670)

SPECint_rate2006 = 325

SPECint_rate_base2006 = 313

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Dec-2011
Hardware Availability: Jun-2012
Software Availability: Dec-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	673	232	686	228	**676**	**231**	16	575	272	567	276	**567**	**276**
401.bzip2	16	**864**	**179**	866	178	862	179	16	**841**	**183**	856	180	837	184
403.gcc	16	521	247	**521**	**247**	521	247	16	**522**	**247**	523	246	522	247
429.mcf	16	326	447	**322**	**453**	322	453	16	326	447	**322**	**453**	322	453
445.gobmk	16	**708**	**237**	712	236	703	239	16	697	241	699	240	**697**	**241**
456.hmmer	16	378	395	378	395	**378**	**395**	16	320	466	322	463	**321**	**465**
458.sjeng	16	806	240	805	240	**805**	**240**	16	**776**	**250**	792	244	771	251
462.libquantum	16	**177**	**1870**	177	1870	177	1870	16	**177**	**1870**	177	1870	177	1870
464.h264ref	16	**852**	**416**	863	410	852	416	16	838	423	847	418	**839**	**422**
471.omnetpp	16	554	180	**554**	**181**	554	181	16	**531**	**188**	530	189	531	188
473.astar	16	626	179	**624**	**180**	622	181	16	626	179	**624**	**180**	622	181
483.xalancbmk	16	**334**	**331**	333	332	335	330	16	**334**	**331**	333	332	335	330

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 numactl was used to bind copies to the cores
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.
Large pages were not enabled for this run
```

Platform Notes

```
Sysinfo program /home/rcaneca/cpu2006/Docs/sysinfo
$Rev: 6775 $ $Date:: 2011-08-16 #$ 8787f7622badcf24e01c368b1db4377c
running on itautecfam5 Sat Dec  3 17:36:01 2011

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Genuine Intel(R) CPU @ 2.60GHz
      1 "physical id"s (chips)
      16 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 8
      siblings  : 16
```

Continued on next page

Platform Notes (Continued)

```
        physical 0: cores 0 1 2 3 4 5 6 7
     cache size : 20480 KB

  From /proc/meminfo
     MemTotal:       32851432 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /usr/bin/lsb_release -d
     Red Hat Enterprise Linux Server release 6.2 (Santiago)

  From /etc/*release* /etc/*version*
     redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
     system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
     system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

  uname -a:
     Linux itautecfam5 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
     x86_64 x86_64 x86_64 GNU/Linux

  run-level 3 Dec 3 17:20

  SPEC is set to: /home/rcaneca/cpu2006
     Filesystem     Type    Size  Used Avail Use% Mounted on
     /dev/mapper/vg_itautecfam5-lv_home
                    ext4    280G  4.5G  262G   2% /home

  (End of data from sysinfo program)
```

General Notes

```
This result was measured on the Servidor Itautec MX205.
The Servidor Itautec MX205, the Servidor Itautec MX225+ and the Servidor Itautec LX205
are electronically equivalent.
```

Base Compiler Invocation

C benchmarks:
```
icc  -m32
```

C++ benchmarks:
```
icpc -m32
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

Continued on next page

Base Portability Flags (Continued)

462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`

C++ benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`
`-Wl,-z,muldefs -L/home/rcaneca/sh/SmartHeap_8.1/lib -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m32`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:
`icpc -m32`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`

Continued on next page

Peak Portability Flags (Continued)

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/home/rcaneca/sh/SmartHeap_8.1/lib -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html`
`http://www.spec.org/cpu2006/flags/Itautec-Servidor_Itautec-Intel-Linux-Platform.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml`
`http://www.spec.org/cpu2006/flags/Itautec-Servidor_Itautec-Intel-Linux-Platform.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 10:29:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 11 September 2012.