SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M820 (Intel Xeon E5-4650, 2.70 GHz)

SPECfp®2006 = 77.9

SPECfp_base2006 = 73.3

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Aug-2012
Hardware Availability: Aug-2012
Software Availability: Jun-2012

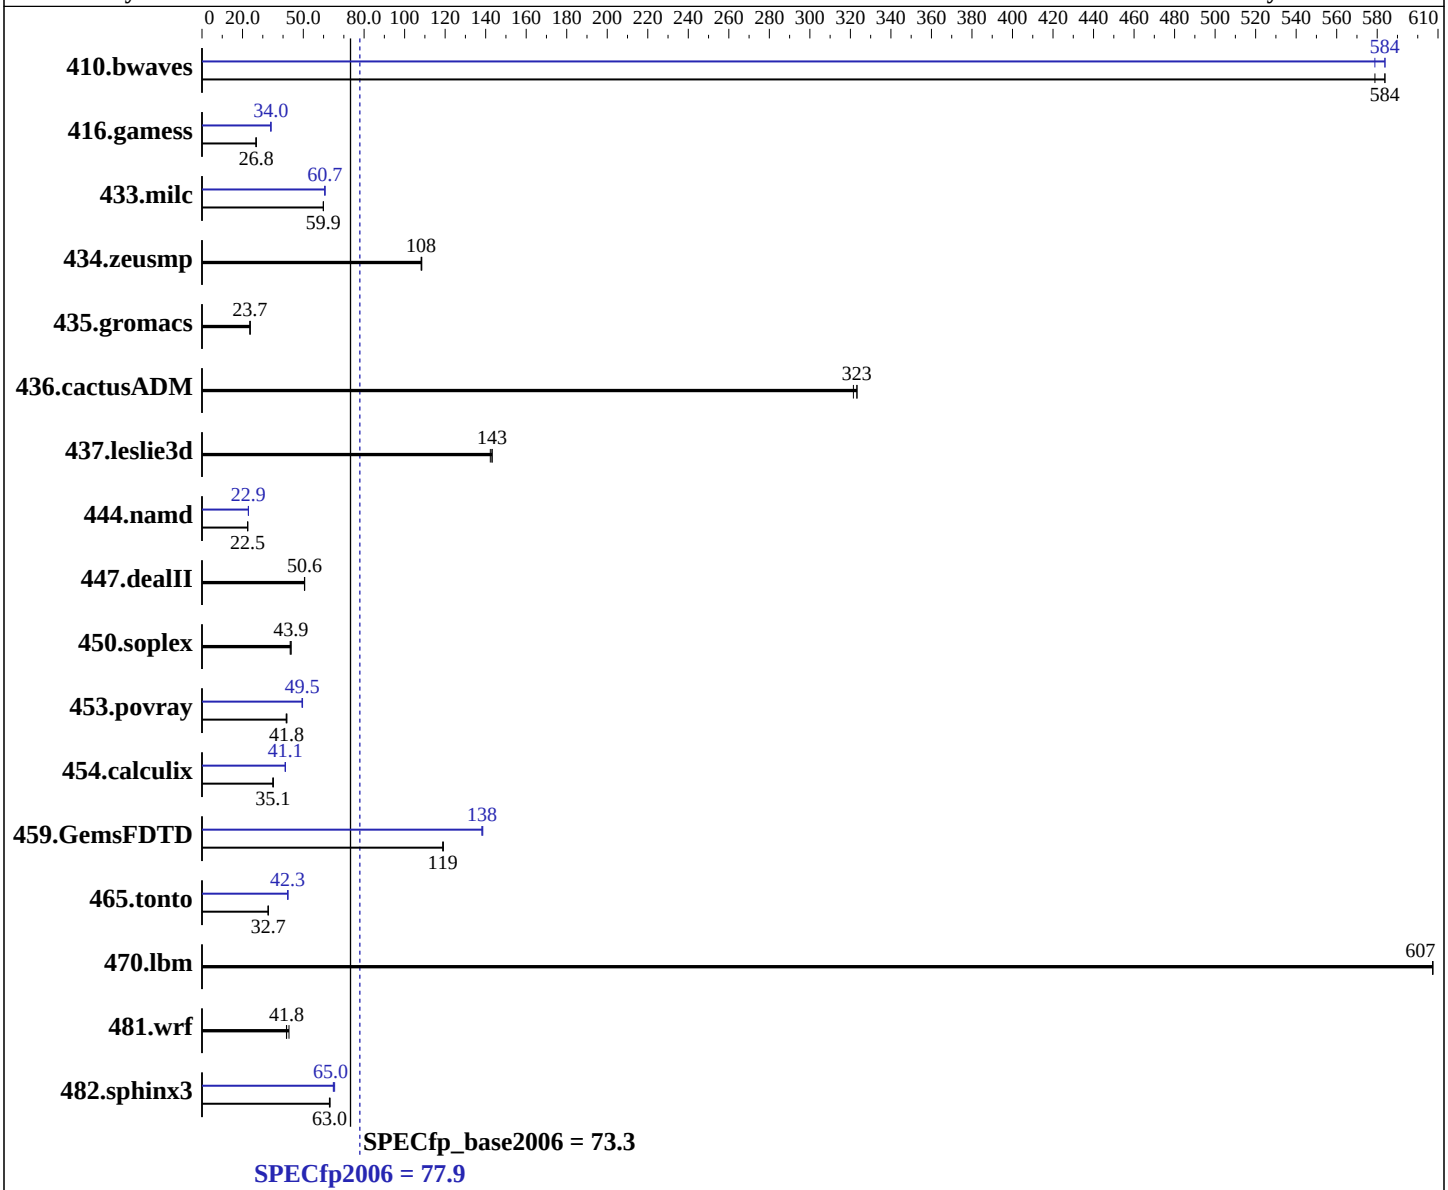

Hardware

CPU Name:	Intel Xeon E5-4650
CPU Characteristics:	Intel Turbo Boost Technology up to 3.30 GHz
CPU MHz:	2700
FPU:	Integrated
CPU(s) enabled:	32 cores, 4 chips, 8 cores/chip
CPU(s) orderable:	2,4 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.3 (Santiago) 2.6.32-279.el6.x86_64
Compiler:	C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux; Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
Auto Parallel:	Yes
File System:	ext4

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M820 (Intel Xeon E5-4650, 2.70 GHz)

SPECfp2006 = 77.9

SPECfp_base2006 = 73.3

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Aug-2012
Hardware Availability: Aug-2012
Software Availability: Jun-2012

L3 Cache:	20 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem:	1 x 300 GB 15000 RPM SAS
Other Hardware:	None

System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other Software:	None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	23.3	584	23.5	579	**23.3**	**584**	**23.3**	**584**	23.3	584	23.5	579
416.gamess	**732**	**26.8**	735	26.6	731	26.8	577	33.9	575	34.0	**576**	**34.0**
433.milc	153	59.9	153	59.9	**153**	**59.9**	**151**	**60.7**	151	60.6	151	60.7
434.zeusmp	84.1	108	**84.1**	**108**	83.9	108	84.1	108	**84.1**	**108**	83.9	108
435.gromacs	300	23.8	302	23.7	**301**	**23.7**	300	23.8	302	23.7	**301**	**23.7**
436.cactusADM	37.2	321	37.0	323	**37.0**	**323**	37.2	321	37.0	323	**37.0**	**323**
437.leslie3d	65.7	143	**65.7**	**143**	66.1	142	65.7	143	**65.7**	**143**	66.1	142
444.namd	356	22.5	**356**	**22.5**	356	22.6	350	22.9	**350**	**22.9**	350	22.9
447.dealII	226	50.7	226	50.6	**226**	**50.6**	226	50.7	226	50.6	**226**	**50.6**
450.soplex	**190**	**43.9**	190	44.0	192	43.5	**190**	**43.9**	190	44.0	192	43.5
453.povray	127	41.8	**127**	**41.8**	128	41.5	107	49.6	**108**	**49.5**	108	49.4
454.calculix	236	35.0	234	35.2	**235**	**35.1**	201	41.1	201	41.1	**201**	**41.1**
459.GemsFDTD	89.1	119	89.3	119	**89.3**	**119**	76.6	139	**76.8**	**138**	76.8	138
465.tonto	301	32.7	301	32.7	**301**	**32.7**	**232**	**42.3**	232	42.3	232	42.4
470.lbm	22.6	607	22.6	607	**22.6**	**607**	22.6	607	22.6	607	**22.6**	**607**
481.wrf	260	42.9	268	41.7	**267**	**41.8**	260	42.9	268	41.7	**267**	**41.8**
482.sphinx3	308	63.2	**309**	**63.0**	310	62.9	301	64.8	**300**	**65.0**	298	65.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
CPU Power Management set to Maximum Performance
Memory Frequency set to Maximum Performance
Turbo Boost set to Enabled
C States/C1E set to Enabled
Logical processor set to Disabled
Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6800
$Rev: 6800 $ $Date:: 2011-10-11 #$ 6f2ebdff5032aaa42e583f96b07f99d3
running on localhost.localdomain Mon Aug 13 15:21:11 2012

This section contains SUT (System Under Test) info as seen by
```

Continued on next page

Platform Notes (Continued)

```
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-4650 0 @ 2.70GHz
      4 "physical id"s (chips)
      32 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 8
      siblings  : 8
      physical 0: cores 0 1 2 3 4 5 6 7
      physical 1: cores 0 1 2 3 4 5 6 7
      physical 2: cores 0 1 2 3 4 5 6 7
      physical 3: cores 0 1 2 3 4 5 6 7
   cache size : 20480 KB

From /proc/meminfo
   MemTotal:       264449440 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   Red Hat Enterprise Linux Server release 6.3 (Santiago)

From /etc/*release* /etc/*version*
   redhat-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)
   system-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
   Linux localhost.localdomain 2.6.32-279.el6.x86_64 #1 SMP Wed Jun 13 18:24:36
   EDT 2012 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Aug 13 09:17

SPEC is set to: /root/cpu2006-1.2
   Filesystem     Type    Size  Used Avail Use% Mounted on
   /dev/mapper/VolGroup-lv_root
                  ext4    267G   14G  240G   6% /

Additional information from dmidecode:
  Memory:
   17x 00AD00B300AD HMT31GR7BFR4C-PB 8 GB 1600 MHz 2 rank
   10x 00AD04B300AD HMT31GR7BFR4C-PB 8 GB 1600 MHz 2 rank
   5x 00CE00B300CE M393B1K70DH0-CK0 8 GB 1600 MHz 2 rank

(End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64"
OMP_NUM_THREADS = "16"

 Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
 memory using RHEL5.5
 Transparent Huge Pages disabled with:
 echo never  > /sys/kernel/mm/redhat_transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

```
    410.bwaves: -DSPEC_CPU_LP64
    416.gamess: -DSPEC_CPU_LP64
      433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
     435.gromacs: -DSPEC_CPU_LP64 -nofor_main
  436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
     444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
    450.soplex: -DSPEC_CPU_LP64
    453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -nofor_main
  459.GemsFDTD: -DSPEC_CPU_LP64
      465.tonto: -DSPEC_CPU_LP64
       470.lbm: -DSPEC_CPU_LP64
       481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
   482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:
```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias
```

C++ benchmarks:
```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias
```

Fortran benchmarks:
```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:
```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias
```

Peak Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32 -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias -parallel

Continued on next page

Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html
http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.html

You can also download the XML flags sources by saving the following links:

`http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml`
`http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 10:26:29 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 11 September 2012.