



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

SPECfp®\_rate2006 = 126

### Acer AR320 F2 (Intel Xeon E3-1230 v2)

SPECfp\_rate\_base2006 = 122

CPU2006 license: 97


Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Jun-2012

Hardware Availability: Jan-2012

Software Availability: Dec-2011

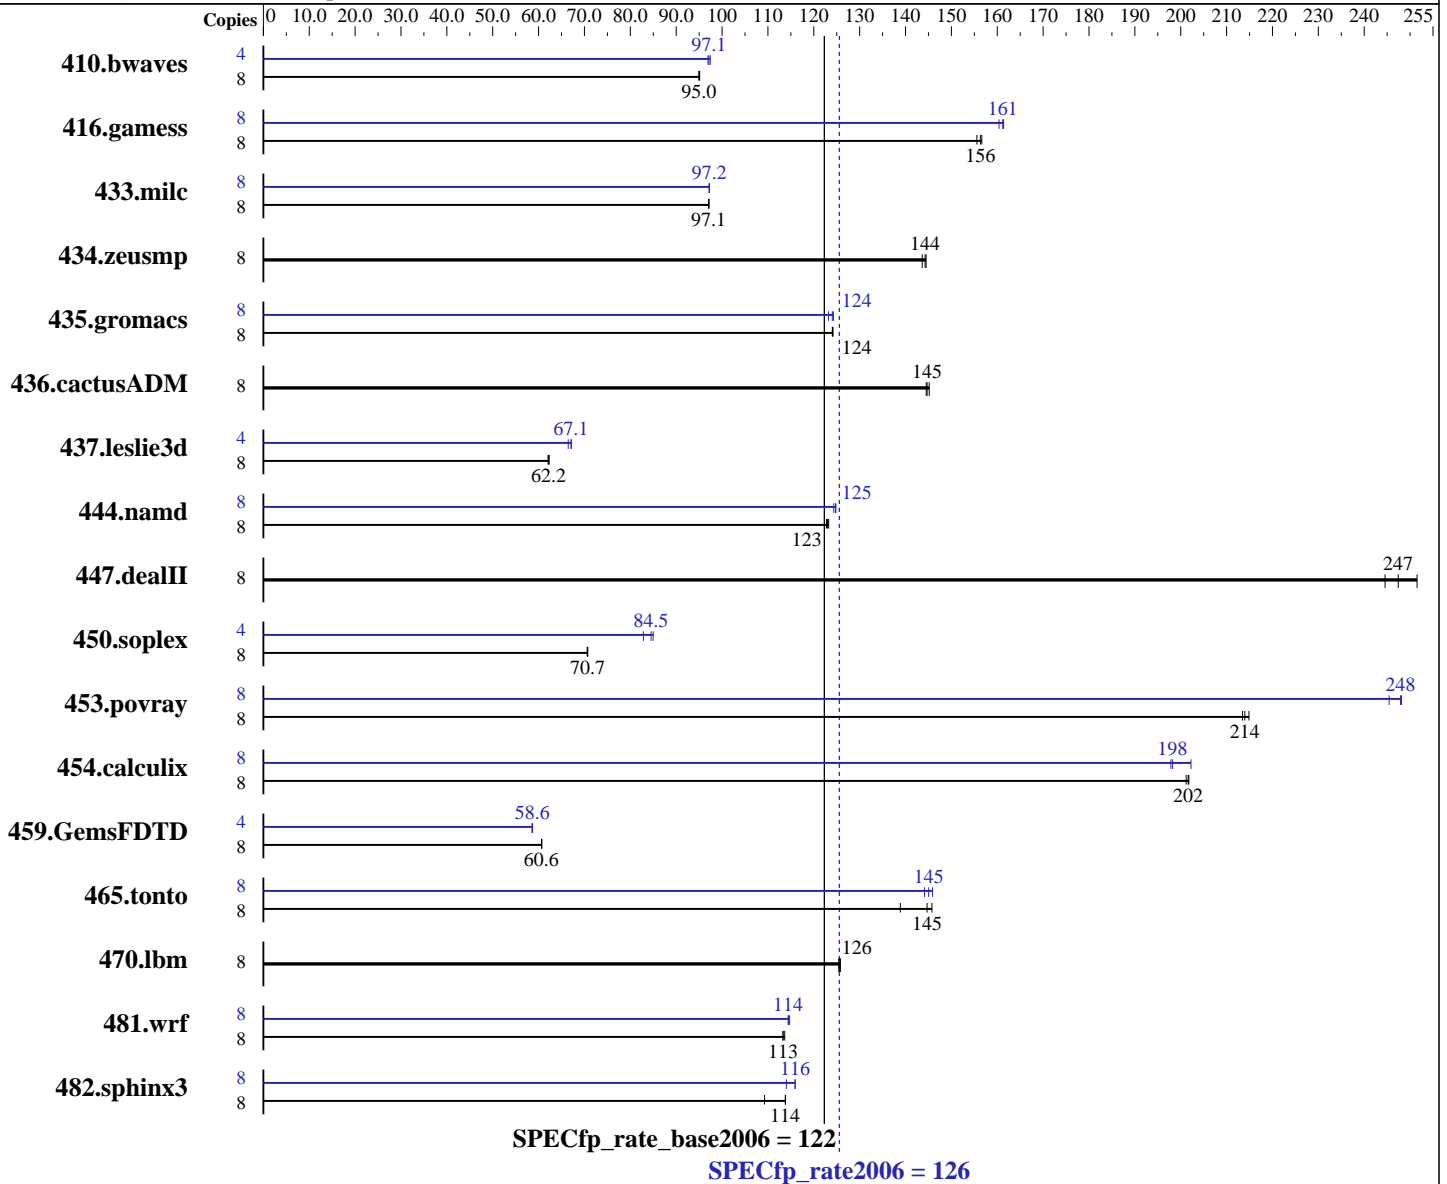

### Hardware

CPU Name: Intel Xeon E3-1230 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
 CPU MHz: 3300  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.1 (Santiago)  
 2.6.32-131.0.15.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp\_rate2006 = 126

Acer AR320 F2 (Intel Xeon E3-1230 v2)

SPECfp\_rate\_base2006 = 122

CPU2006 license: 97

Test date: Jun-2012

Test sponsor: Acer Incorporated

Hardware Availability: Jan-2012

Tested by: Acer Incorporated

Software Availability: Dec-2011

L3 Cache: 8 MB I+D on chip per chip  
Other Cache: None  
Memory: 16 GB (2 x 8 GB 2Rx8 PC3-10600E-9,ECC)  
Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	<b>1145</b>	<b>95.0</b>	1143	95.1	1145	95.0	4	561	96.9	558	97.4	<b>560</b>	<b>97.1</b>
416.gamess	8	<b>1002</b>	<b>156</b>	1000	157	1007	156	8	971	161	977	160	<b>972</b>	<b>161</b>
433.milc	8	756	97.1	756	97.1	<b>756</b>	<b>97.1</b>	8	755	97.2	<b>755</b>	<b>97.2</b>	755	97.2
434.zeusmp	8	<b>505</b>	<b>144</b>	507	144	504	144	8	<b>505</b>	<b>144</b>	507	144	504	144
435.gromacs	8	460	124	460	124	<b>460</b>	<b>124</b>	8	460	124	464	123	<b>461</b>	<b>124</b>
436.cactusADM	8	659	145	662	145	<b>661</b>	<b>145</b>	8	659	145	662	145	<b>661</b>	<b>145</b>
437.leslie3d	8	<b>1209</b>	<b>62.2</b>	1212	62.1	1207	62.3	4	<b>561</b>	<b>67.1</b>	560	67.1	566	66.5
444.namd	8	<b>522</b>	<b>123</b>	521	123	523	123	8	516	124	514	125	<b>514</b>	<b>125</b>
447.dealII	8	<b>370</b>	<b>247</b>	374	245	364	252	8	<b>370</b>	<b>247</b>	374	245	364	252
450.soplex	8	<b>944</b>	<b>70.7</b>	945	70.6	944	70.7	4	403	82.8	393	85.0	<b>395</b>	<b>84.5</b>
453.povray	8	<b>199</b>	<b>214</b>	198	215	199	213	8	173	245	172	248	<b>172</b>	<b>248</b>
454.calculix	8	327	202	<b>327</b>	<b>202</b>	328	201	8	<b>333</b>	<b>198</b>	334	198	326	202
459.GemsFDTD	8	1400	60.6	1398	60.7	<b>1400</b>	<b>60.6</b>	4	723	58.7	<b>724</b>	<b>58.6</b>	724	58.6
465.tonto	8	540	146	567	139	<b>544</b>	<b>145</b>	8	546	144	540	146	<b>543</b>	<b>145</b>
470.lbm	8	874	126	<b>875</b>	<b>126</b>	876	125	8	874	126	<b>875</b>	<b>126</b>	876	125
481.wrf	8	786	114	789	113	<b>789</b>	<b>113</b>	8	781	114	779	115	<b>781</b>	<b>114</b>
482.sphinx3	8	1427	109	1370	114	<b>1370</b>	<b>114</b>	8	1368	114	<b>1345</b>	<b>116</b>	1345	116

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Sysinfo program /usr/cpu2006/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on localhost.localdomain Thu Jun 14 11:02:41 2012

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Acer Incorporated**

**SPECfp\_rate2006 = 126**

**Acer AR320 F2 (Intel Xeon E3-1230 v2)**

**SPECfp\_rate\_base2006 = 122**

**CPU2006 license:** 97

**Test sponsor:** Acer Incorporated

**Tested by:** Acer Incorporated

**Test date:** Jun-2012

**Hardware Availability:** Jan-2012

**Software Availability:** Dec-2011

## Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) CPU E3-1230 V2 @ 3.30GHz
 1 "physical id"s (chips)
 8 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores      : 4
siblings       : 8
physical 0:    : cores 0 1 2 3
cache size     : 8192 KB
```

From /proc/meminfo

```
MemTotal:      16300896 kB
HugePages_Total: 0
Hugepagesize:   2048 kB
```

/usr/bin/lsc\_release -d

```
Red Hat Enterprise Linux Server release 6.1 (Santiago)
```

From /etc/\*release\* /etc/\*version\*

```
redhat-release: Red Hat Enterprise Linux Server release 6.1 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.1 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

uname -a:

```
Linux localhost.localdomain 2.6.32-131.0.15.el6.x86_64 #1 SMP Tue May 10
15:42:40 EDT 2011 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Jun 14 00:38

SPEC is set to: /usr/cpu2006

```
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/VolGroup-lv_root
  ext4           50G     42G  5.2G  90% /
```

Additional information from dmidecode:

Memory:

```
2x Hynix/Hyundai HMT41GU7MFR8A-H9 8 GB 1333 MHz 2 rank
```

(End of data from sysinfo program)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Acer Incorporated**

**SPECfp\_rate2006 = 126**

**Acer AR320 F2 (Intel Xeon E3-1230 v2)**

**SPECfp\_rate\_base2006 = 122**

**CPU2006 license:** 97

**Test date:** Jun-2012

**Test sponsor:** Acer Incorporated

**Hardware Availability:** Jan-2012

**Tested by:** Acer Incorporated

**Software Availability:** Dec-2011

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5  
Transparent Huge Pages disabled with:  
echo never > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Acer Incorporated**

**SPECfp\_rate2006 = 126**

**Acer AR320 F2 (Intel Xeon E3-1230 v2)**

**SPECfp\_rate\_base2006 = 122**

**CPU2006 license:** 97

**Test date:** Jun-2012

**Test sponsor:** Acer Incorporated

**Hardware Availability:** Jan-2012

**Tested by:** Acer Incorporated

**Software Availability:** Dec-2011

## Base Optimization Flags (Continued)

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
465.tonto: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp\_rate2006 = 126

Acer AR320 F2 (Intel Xeon E3-1230 v2)

SPECfp\_rate\_base2006 = 122

CPU2006 license: 97

Test date: Jun-2012

Test sponsor: Acer Incorporated

Hardware Availability: Jan-2012

Tested by: Acer Incorporated

Software Availability: Dec-2011

## Peak Portability Flags (Continued)

470.lbm: -DSPEC\_CPU\_LP64

481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

### C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2

### C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Acer Incorporated**

**SPECfp\_rate2006 = 126**

**Acer AR320 F2 (Intel Xeon E3-1230 v2)**

**SPECfp\_rate\_base2006 = 122**

**CPU2006 license:** 97

**Test sponsor:** Acer Incorporated

**Tested by:** Acer Incorporated

**Test date:** Jun-2012

**Hardware Availability:** Jan-2012

**Software Availability:** Dec-2011

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
             -static -auto-ilp32
```

```
436.cactusADM: basepeak = yes
```

```
454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32
```

```
481.wrf: Same as 454.calculix
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 12:56:13 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 9 October 2012.