SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec MX225+ (Intel Xeon E5-2650)

SPECint®_rate2006 = 532

SPECint_rate_base2006 = 508

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Dec-2011
Hardware Availability: Jun-2012
Software Availability: Dec-2011

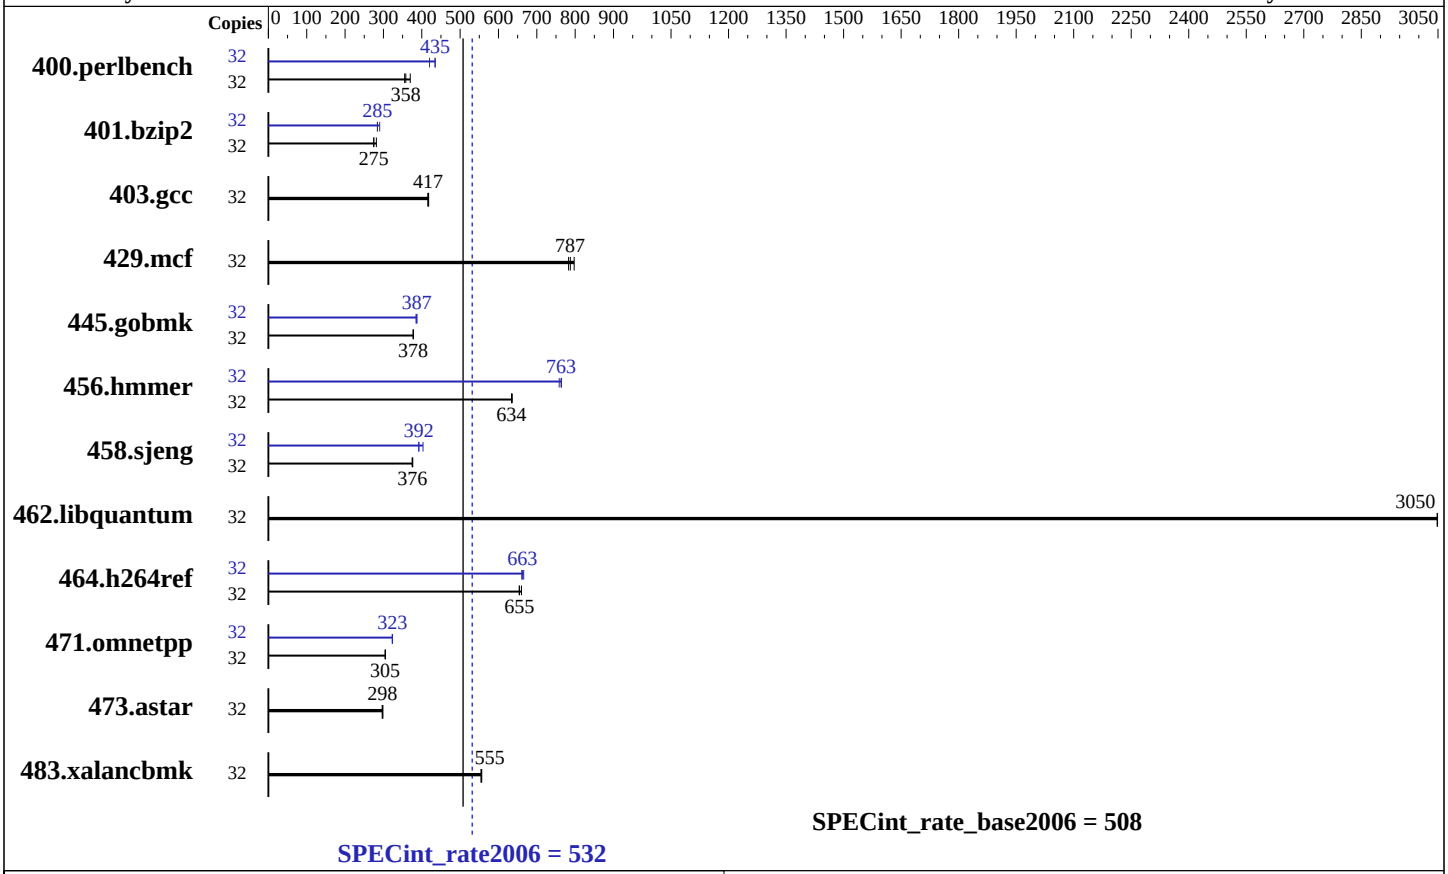

Hardware

CPU Name:	Intel Xeon E5-2650
CPU Characteristics:	Intel Turbo Boost Technology up to 2.80 GHz
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	20 MB I+D on chip per chip
Other Cache:	None
Memory:	64 GB (16 x 4 GB 1Rx4 PC3-12800R-11, ECC)
Disk Subsystem:	500 GB, SATA-2, 7200 RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server Release 6.2, 2.6.32-220.el6.x86_64
Compiler:	C/C++: Version 12.1.0 of Intel Compiler XE Build 20111011
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V8.1

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec MX225+ (Intel Xeon E5-2650)

SPECint_rate2006 = 532

SPECint_rate_base2006 = 508

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Dec-2011
Hardware Availability: Jun-2012
Software Availability: Dec-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	845	370	880	355	**872**	**358**	32	744	420	718	435	**719**	**435**
401.bzip2	32	1097	282	1124	275	**1123**	**275**	32	1087	284	1064	290	**1085**	**285**
403.gcc	32	**618**	**417**	616	418	619	416	32	**618**	**417**	616	418	619	416
429.mcf	32	366	797	373	783	**371**	**787**	32	366	797	373	783	**371**	**787**
445.gobmk	32	889	378	**888**	**378**	888	378	32	872	385	867	387	**867**	**387**
456.hmmer	32	**471**	**634**	471	634	469	636	32	**391**	**763**	391	764	394	758
458.sjeng	32	1033	375	1028	376	**1030**	**376**	32	988	392	**987**	**392**	960	403
462.libquantum	32	217	3050	**217**	**3050**	218	3050	32	217	3050	**217**	**3050**	218	3050
464.h264ref	32	1083	654	**1081**	**655**	1073	660	32	1064	666	**1068**	**663**	1072	661
471.omnetpp	32	655	305	657	305	**656**	**305**	32	618	324	619	323	**618**	**323**
473.astar	32	753	298	**754**	**298**	757	297	32	753	298	**754**	**298**	757	297
483.xalancbmk	32	**398**	**555**	398	554	397	556	32	**398**	**555**	398	554	397	556

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 numactl was used to bind copies to the cores
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.
Large pages were not enabled for this run
```

Platform Notes

```
Sysinfo program /home/rcaneca/cpu2006/Docs/sysinfo
$Rev: 6775 $ $Date:: 2011-08-16 #$ 8787f7622badcf24e01c368b1db4377c
running on localhost Fri Dec 30 16:39:37 2011

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2650 0 @ 2.00GHz
      2 "physical id"s (chips)
      32 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 8
      siblings  : 16
```

Continued on next page

Platform Notes (Continued)

```
        physical 0: cores 0 1 2 3 4 5 6 7
        physical 1: cores 0 1 2 3 4 5 6 7
     cache size : 20480 KB

  From /proc/meminfo
     MemTotal:       65942288 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /usr/bin/lsb_release -d
     Red Hat Enterprise Linux Server release 6.2 (Santiago)

  From /etc/*release* /etc/*version*
     redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
     system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
     system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

  uname -a:
     Linux localhost 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
     x86_64 x86_64 x86_64 GNU/Linux

  run-level 3 Dec 30 16:37

  SPEC is set to: /home/rcaneca/cpu2006
     Filesystem     Type    Size  Used Avail Use% Mounted on
     /dev/mapper/vg_it5rh-lv_home
                    ext4    193G  2.1G  181G   2% /home

  (End of data from sysinfo program)
```

General Notes

```
This result was measured on the Servidor Itautec MX205.
The Servidor Itautec MX205, the Servidor Itautec LX205 and the Servidor Itautec MX225+
are electronically equivalent.
```

Base Compiler Invocation

C benchmarks:

```
icc  -m32
```

C++ benchmarks:

```
icpc -m32
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`

C++ benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`
`-Wl,-z,muldefs -L/home/rcaneca/sh/SmartHeap_8.1/lib -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m32`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:
`icpc -m32`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`

Continued on next page

Peak Portability Flags (Continued)

462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -auto-ilp32

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/home/rcaneca/sh/SmartHeap_8.1/lib -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Itautec-Servidor_Itautec-Intel-Linux-Platform.html`
`http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Itautec-Servidor_Itautec-Intel-Linux-Platform.xml`
`http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 12:49:51 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 9 October 2012.