



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,
AMD Opteron 6344

SPECfp[®]_rate2006 = 734

SPECfp_rate_base2006 = 664

CPU2006 license: 49


Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Sep-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

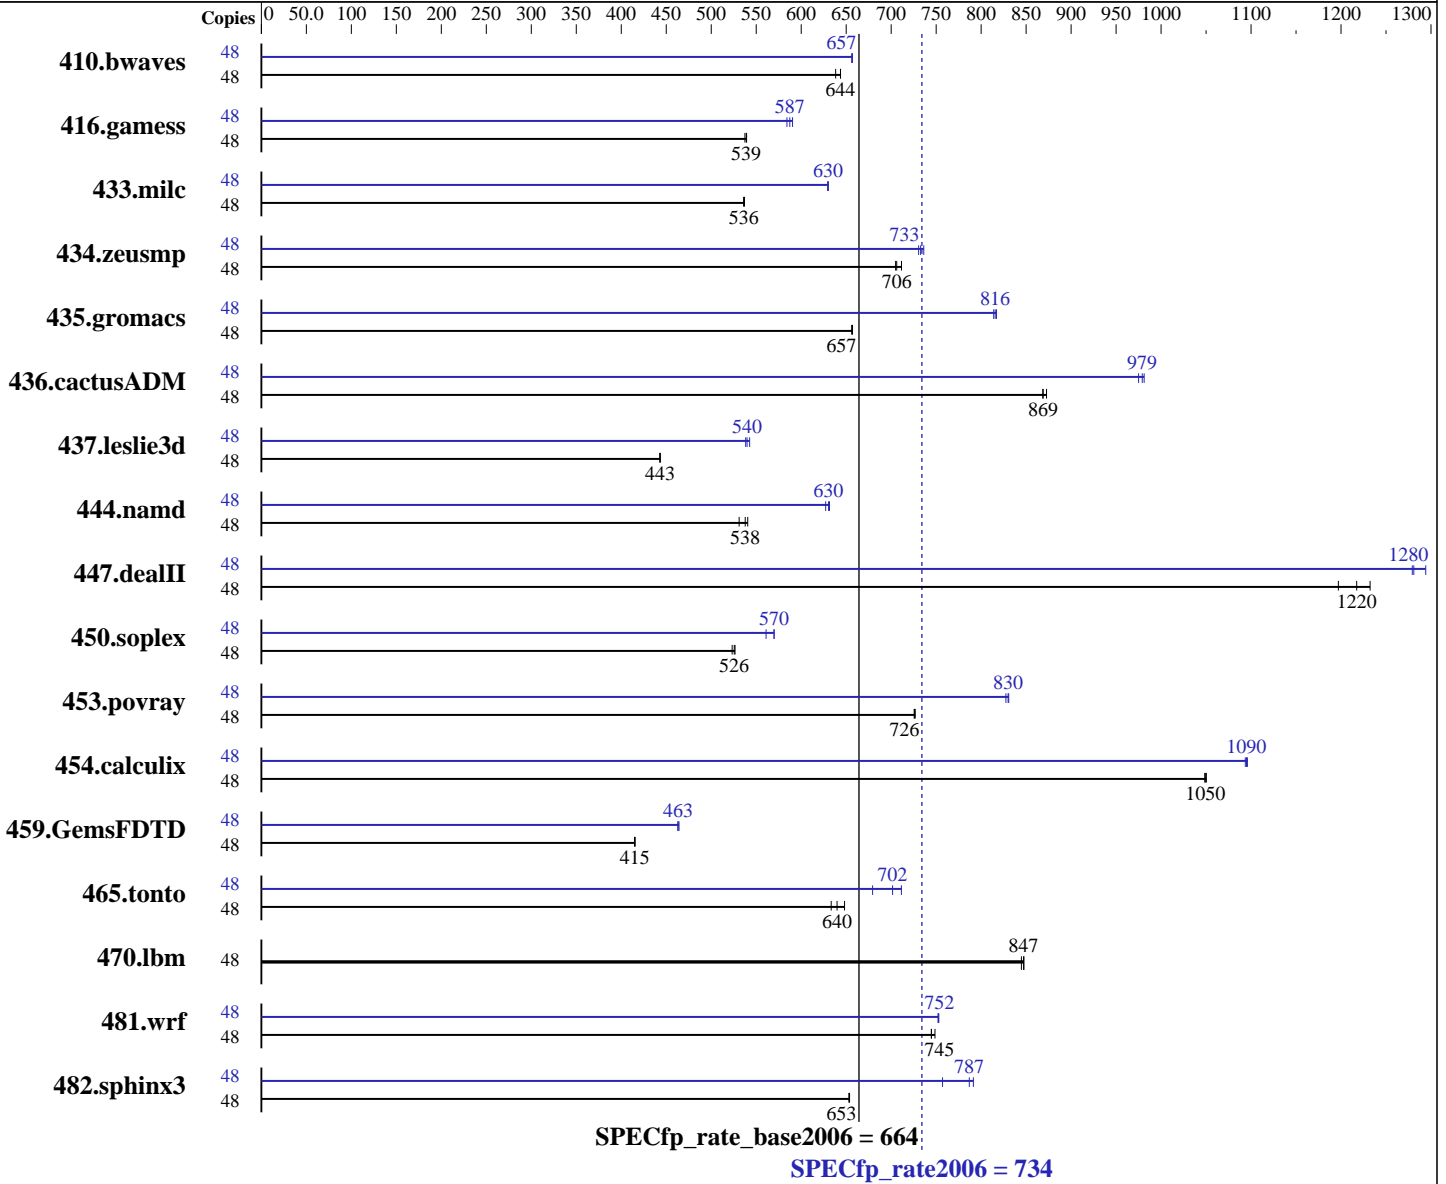

Hardware

CPU Name: AMD Opteron 6344
 CPU Characteristics: AMD Turbo CORE technology up to 3.20 GHz
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 48 cores, 4 chips, 12 cores/chip
 CPU(s) orderable: 1,2,4 chips

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.3,
 Kernel 2.6.32-279.el6.x86_64
 Compiler: C/C++/Fortran: Version 4.5.2 of x86 Open64
 Compiler Suite (from AMD)
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,
AMD Opteron 6344

SPECfp_rate2006 = **734**

SPECfp_rate_base2006 = **664**

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Sep-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

Primary Cache: 384 KB I on chip per chip,
64 KB I shared / 2 cores;
16 KB D on chip per core

Secondary Cache: 12 MB I+D on chip per chip, 2 MB shared / 2 cores

L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 6 cores

Other Cache: None

Memory: 256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC)

Disk Subsystem: 1 x 250 GB SSD

Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	48	1022	638	1013	644	1013	644	48	994	656	993	657	993	657
416.gamess	48	1744	539	1743	539	1749	537	48	1592	590	1600	587	1609	584
433.milc	48	822	536	821	537	822	536	48	700	630	700	629	699	630
434.zeusmp	48	620	705	619	706	614	711	48	596	733	598	731	593	736
435.gromacs	48	522	657	522	656	522	657	48	419	817	421	814	420	816
436.cactusADM	48	660	869	657	873	660	869	48	586	979	588	975	585	981
437.leslie3d	48	1018	443	1019	443	1018	443	48	831	543	838	538	836	540
444.namd	48	716	538	712	541	725	531	48	610	631	611	630	614	627
447.dealII	48	459	1200	446	1230	451	1220	48	429	1280	429	1280	424	1290
450.soplex	48	765	523	762	526	760	526	48	714	561	702	570	703	570
453.povray	48	351	727	352	726	352	726	48	308	830	309	828	307	831
454.calculix	48	378	1050	377	1050	377	1050	48	362	1090	361	1100	362	1090
459.GemsFDTD	48	1228	415	1227	415	1226	415	48	1100	463	1099	463	1097	464
465.tonto	48	729	648	738	640	746	633	48	673	702	695	679	664	711
470.lbm	48	781	845	778	848	779	847	48	781	845	778	848	779	847
481.wrf	48	720	745	720	745	716	749	48	713	752	713	752	712	753
482.sphinx3	48	1431	654	1432	653	1432	653	48	1182	791	1189	787	1236	757

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent_hugepage=never as a boot parameter in /boot/grub/menu.lst
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,
AMD Opteron 6344

SPECfp_rate2006 = 734

SPECfp_rate_base2006 = 664

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Sep-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

Operating System Notes (Continued)

```
Set vm/nr_hugepages=43008 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

General Notes

Environment variables set by runspec before the start of the run:

```
HUGETLB_LIMIT = "896"
```

```
LD_LIBRARY_PATH = "/root/work/cpu2006v1.2/amd1206-rate-libs-revA/32:/root/work/cpu2006v1.2/amd1206-rate-libs-revA/64"
```

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6386SE chips + 128GB Memory using RHEL 6.3

Base Compiler Invocation

C benchmarks:

```
opencc
```

C++ benchmarks:

```
openCC
```

Fortran benchmarks:

```
openf95
```

Benchmarks using both Fortran and C:

```
opencc openf95
```

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
```

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 3



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,
AMD Opteron 6344

SPECfp_rate2006 = 734

SPECfp_rate_base2006 = 664

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Sep-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

Base Portability Flags (Continued)

481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
-fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000
-IPA:small_pu=100 -mso -march=bdver1

C++ benchmarks:

-Ofast -static -CG:load_exe=0 -OPT:malloc_alg=1 -INLINE:aggressive=on
-HP:bd=2m:heap=2m -D__OPEN64_FAST_SET -march=bdver1

Fortran benchmarks:

-Ofast -LNO:blocking=off -LNO:simd_peel_align=on -OPT:rsqrt=2
-OPT:unroll_size=256 -HP:bd=2m:heap=2m -mso -march=bdver1

Benchmarks using both Fortran and C:

-Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000
-IPA:small_pu=100 -mso -march=bdver1 -LNO:blocking=off
-LNO:simd_peel_align=on -OPT:rsqrt=2 -OPT:unroll_size=256

Peak Compiler Invocation

C benchmarks:

opencc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

opencc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,
AMD Opteron 6344

SPECfp_rate2006 = 734

SPECfp_rate_base2006 = 664

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Sep-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

Peak Portability Flags (Continued)

```

435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
-fno-second-underscore

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -Ofast -CG:movnti=1 -CG:locs_best=on -HP:bdt=2m:heap=2m
-IPA:plimit=7000 -IPA:callee_limit=1200
-OPT:struct_array_copy=2 -OPT:alias=field_sensitive -mso
-march=bdver1

470.lbm: basepeak = yes

482.sphinx3: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-m32 -IPA:plimit=1000 -OPT:malloc_alg=2 -CG:cmp_peep=on
-CG:p2align=0 -CG:load_exe=1 -CG:dsched=on
-INLINE:aggressive=on -LNO:prefetch=2 -LNO:prefetch_ahead=4
-mso -march=bdver2

```

C++ benchmarks:

```

444.namd: -Ofast -IPA:plimit=3000 -LNO:ignore_feedback=off
-CG:local_sched_alg=0 -CG:load_exe=0 -OPT:unroll_size=256
-fno-exceptions -HP:bdt=2m:heap=2m -LNO:if_select_conv=1
-OPT:alias=disjoint -LNO:psimd_iso_unroll=ON -march=bdver1

447.deallI: -Ofast -D_OPEN64_FAST_SET -static -INLINE:aggressive=on
-LNO:opt=1 -LNO:simd=2 -fno-emit-exceptions -m32
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on
-CG:cmp_peep=on -CG:movext_icmp=off -TENV:frame_pointer=off
-march=bdver1

450.soplex: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
-LNO:ignore_feedback=off -INLINE:aggressive=on -OPT:RO=1
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -fno-exceptions -CG:p2align=0
-m32 -mno-fma4 -HP:bdt=2m:heap=2m -WOPT:sib=on
-march=bdver1

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,
AMD Opteron 6344

SPECfp_rate2006 = 734

SPECfp_rate_base2006 = 664

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Sep-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

Peak Optimization Flags (Continued)

453.povray: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-CG:pre_local_sched=off -CG:p2align=0 -CG:p2align_split=on
-CG:dsched=on -INLINE:aggressive=on -HP:bd=2m:heap=2m
-OPT:transform=2 -OPT:alias=disjoint -WOPT:aggcm=0
-march=bdver2

Fortran benchmarks:

410.bwaves: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-OPT:Ofast -OPT:treeheight=on -LNO:blocking=off
-LNO:ignore_feedback=off -LNO:fu=4 -LNO:loop_model_simd=on
-LNO:simd_rm_unity_remainder=on -WOPT:aggstr=0
-HP:bdt=2m:heap=2m -CG:cmp_peep=on -march=bdver1

416.gamess: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:fu=6 -LNO:blocking=0 -LNO:simd=2 -OPT:ro=3
-OPT:recip=on -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m
-WOPT:sib=on -march=bdver1

434.zeusmp: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:blocking=off -LNO:interchange=off -IPA:plimit=1500
-HP:bdt=2m:heap=2m -march=bdver1

437.leslie3d: -Ofast -CG:pre_minreg_level=2 -LNO:simd=0 -LNO:fusion=2
-HP:bdt=2m:heap=2m -mso -march=bdver1

459.GemsFDTD: -Ofast -IPA:plimit=1500 -OPT:unroll_size=1024
-OPT:unroll_times_max=16 -LNO:fission=2
-CG:local_sched_alg=2 -HP -march=bdver1

465.tonto: -Ofast -OPT:alias=no_f90_pointer_alias -LNO:blocking=off
-CG:load_exe=1 -CG:local_sched_alg=3 -IPA:plimit=525
-HP:bdt=2m:heap=2m -march=bdver1

Benchmarks using both Fortran and C:

435.gromacs: -Ofast -OPT:rsqrt=2 -HP:bdt=2m:heap=2m
-CG:local_sched_alg=2 -CG:load_exe=3 -GRA:unspill=on
-march=bdver1 -LNO:simd=3

436.cactusADM: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:blocking=off -LNO:prefetch=2 -LNO:pf2=0
-LNO:prefetch_ahead=4 -HP -CG:locs_shallow_depth=1
-CG:load_exe=0 -CG:dsched=on -WOPT:sib=on -march=bdver1

454.calculix: -Ofast -OPT:unroll_size=256 -OPT:alias=disjoint
-GRA:optimize_boundary=on -CG:dsched=on -HP:bdt=2m:heap=2m
-march=bdver1

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,
AMD Opteron 6344

SPECfp_rate2006 = 734

SPECfp_rate_base2006 = 664

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Sep-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

Peak Optimization Flags (Continued)

```
481.wrf: -Ofast -LNO:blocking=off -LANG:copyinout=off
         -IPA:callee_limit=5000 -GRA:prioritize_by_density=on -HP
         -WOPT:sib=on -march=bdver1
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-II.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-II.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 13:00:15 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 5 November 2012.