



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

Tyan YR190-B8228,
AMD Opteron 4332 HE

SPECint_rate2006 = 247

SPECint_rate_base2006 = 220

CPU2006 license: 49


Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2012

Hardware Availability: Dec-2012

Software Availability: Aug-2012

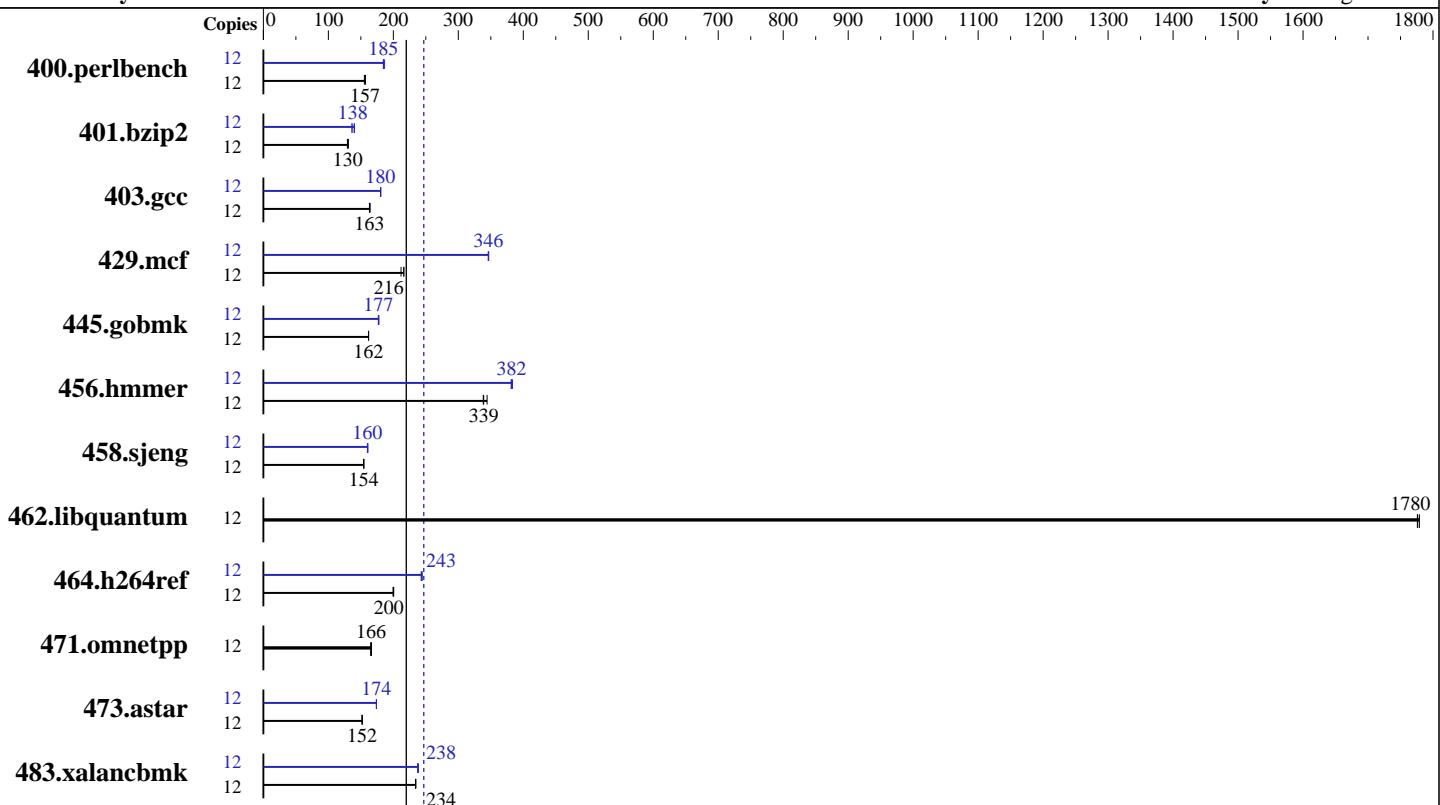

SPECint_rate_base2006 = 220

SPECint_rate2006 = 247

Hardware

| | |
|----------------------|---|
| CPU Name: | AMD Opteron 4332 HE |
| CPU Characteristics: | AMD Turbo CORE technology up to 3.70 GHz |
| CPU MHz: | 3000 |
| FPU: | Integrated |
| CPU(s) enabled: | 12 cores, 2 chips, 6 cores/chip |
| CPU(s) orderable: | 1,2 chips |
| Primary Cache: | 192 KB I on chip per chip, 64 KB I shared / 2 cores; 16 KB D on chip per core |
| Secondary Cache: | 6 MB I+D on chip per chip, 2 MB shared / 2 cores |
| L3 Cache: | 8 MB I+D on chip per chip |
| Other Cache: | None |
| Memory: | 32 GB (4 x 8 GB 2Rx4 PC3-12800R-11, ECC) |
| Disk Subsystem: | 1 x 128 GB SSD |
| Other Hardware: | None |

Software

| | |
|-------------------|--|
| Operating System: | Red Hat Enterprise Linux Server release 6.3, Kernel 2.6.32-279.el6.x86_64 |
| Compiler: | C/C++: Version 4.5.2 of x86 Open64 Compiler Suite (from AMD) |
| Auto Parallel: | No |
| File System: | ext3 |
| System State: | Run level 3 (Full multiuser with network) |
| Base Pointers: | 32/64-bit |
| Peak Pointers: | 32/64-bit |
| Other Software: | SmartHeap 10.0 32-bit Library for Linux |



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

Tyan YR190-B8228,
AMD Opteron 4332 HE

SPECint_rate2006 = 247

SPECint_rate_base2006 = 220

CPU2006 license: 49

Test date: Oct-2012

Test sponsor: Advanced Micro Devices

Hardware Availability: Dec-2012

Tested by: Advanced Micro Devices

Software Availability: Aug-2012

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|----------------|--------|------------|-------------|-------------|------------|------------|------------|--------|------------|-------------|------------|------------|-------------|------------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 400.perlbench | 12 | 746 | 157 | 754 | 155 | 749 | 157 | 12 | 634 | 185 | 628 | 187 | 635 | 185 |
| 401.bzip2 | 12 | 891 | 130 | 886 | 131 | 896 | 129 | 12 | 826 | 140 | 841 | 138 | 851 | 136 |
| 403.gcc | 12 | 591 | 163 | 588 | 164 | 592 | 163 | 12 | 535 | 181 | 535 | 180 | 535 | 180 |
| 429.mcf | 12 | 517 | 212 | 506 | 216 | 506 | 216 | 12 | 316 | 346 | 316 | 346 | 316 | 347 |
| 445.gobmk | 12 | 777 | 162 | 777 | 162 | 778 | 162 | 12 | 708 | 178 | 711 | 177 | 711 | 177 |
| 456.hmmer | 12 | 325 | 344 | 331 | 338 | 330 | 339 | 12 | 293 | 382 | 294 | 381 | 292 | 383 |
| 458.sjeng | 12 | 941 | 154 | 939 | 155 | 940 | 154 | 12 | 906 | 160 | 907 | 160 | 902 | 161 |
| 462.libquantum | 12 | 140 | 1780 | 140 | 1780 | 140 | 1780 | 12 | 140 | 1780 | 140 | 1780 | 140 | 1780 |
| 464.h264ref | 12 | 1324 | 201 | 1329 | 200 | 1329 | 200 | 12 | 1086 | 245 | 1093 | 243 | 1092 | 243 |
| 471.omnetpp | 12 | 452 | 166 | 451 | 166 | 454 | 165 | 12 | 452 | 166 | 451 | 166 | 454 | 165 |
| 473.astar | 12 | 554 | 152 | 554 | 152 | 555 | 152 | 12 | 484 | 174 | 485 | 174 | 484 | 174 |
| 483.xalancbmk | 12 | 354 | 234 | 353 | 234 | 353 | 235 | 12 | 348 | 238 | 349 | 238 | 347 | 239 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Transparent huge pages were enabled for this run (OS default)

Huge pages were not configured for this run.

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/root/work/cpu2006v1.2/amd1206-rate-libs-revA/32:/root/work/cpu2006v1.2/amd1206-rate-libs-revA/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
<http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6386SE chips + 128GB Memory using RHEL 6.3



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

Tyan YR190-B8228,
AMD Opteron 4332 HE

SPECint_rate2006 = 247

SPECint_rate_base2006 = 220

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2012

Hardware Availability: Dec-2012

Software Availability: Aug-2012

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:
`-Ofast -CG:local_sched_alg=1 -INLINE:aggressive=ON -IPA:plimit=8000
-IPA:small_pu=100 -HP:bd=2m:heap=2m -mso -LNO:prefetch=2
-march=bdver1`

C++ benchmarks:
`-Ofast -m32 -INLINE:aggressive=on -CG:cmp_peep=on -D__OPEN64_FAST_SET
-march=bdver1 -L/root/work/libraries/SmartHeap-10/lib -lsmartheap`

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

Tyan YR190-B8228,
AMD Opteron 4332 HE

SPECint_rate2006 = 247

SPECint_rate_base2006 = 220

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2012

Hardware Availability: Dec-2012

Software Availability: Aug-2012

Peak Portability Flags (Continued)

```

401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

400.perlbench: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
    -LNO:prefetch=2 -LNO:opt=0 -IPA:plimit=20000
    -OPT:unroll_times_max=8 -OPT:unroll_size=256
    -OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
    -WOPT:sib=on -CG:local_sched_alg=1 -CG:unroll_fb_req=on
    -CG:movext_icmp=off -HP:bd=2m:heap=2m -march=bdver1
    -GRA:aggr_loop_splitting=off -GRA:loop_splitting=off

401.bzip2: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
    -LNO:prefetch=2 -LNO:pf2=0 -OPT:alias=disjoint
    -OPT:goto=off -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m
    -march=bdver2

403.gcc: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
    -LNO:trip_count=256 -CG:cmp_peep=on -CG:pre_minreg_level=2
    -m32 -HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200
    -WOPT:sib=on -march=bdver2 -mno-fma4

429.mcf: -O3 -OPT:unroll_times_max=5 -ipa -INLINE:aggressive=on
    -CG:gcm=off -CG:dsched=on -GRA:prioritize_by_density=on
    -m32 -HP:bdt=2m:heap=2m -mso -march=bdver1

445.gobmk: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
    -OPT:unroll_size=256 -OPT:unroll_times_max=8
    -OPT:keep_ext=on -IPA:plimit=750 -IPA:min_hotness=300
    -IPA:pu_reorder=1 -LNO:ignore_feedback=off -WOPT:if_conv=2
    -HP:bd=2m:heap=2m -march=bdver1

456.hmmer: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
    -LNO:prefetch=2 -OPT:alias=disjoint
    -OPT:unroll_times_max=16 -OPT:unroll_size=512
    -OPT:unroll_level=2 -OPT:keep_ext=on -CG:cflow=0
    -CG:cmp_peep=on -CG:pre_local_sched=off -HP:bdt=2m:heap=2m
    -CG:p2align=0 -CG:load_exe=3 -CG:dsched=on -march=bdver1

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

Tyan YR190-B8228,
AMD Opteron 4332 HE

SPECint_rate2006 = 247

SPECint_rate_base2006 = 220

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2012

Hardware Availability: Dec-2012

Software Availability: Aug-2012

Peak Optimization Flags (Continued)

```
458.sjeng: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast  
          -CG:ptr_load_use=0 -CG:divrem_opt=on -CG:movext_icmp=off  
          -CG:locs_best=on -LNO:full_unroll=10 -IPA:pu_reorder=2  
          -HP:heap=2m:bd=2m -WOPT:sib=on -march=bdver1
```

```
462.libquantum: basepeak = yes
```

```
464.h264ref: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3  
           -OPT:unroll_size=256 -OPT:unroll_times_max=2  
           -IPA:plimit=20000 -OPT:alias=disjoint -CG:ptr_load_use=0  
           -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m -march=bdver1
```

C++ benchmarks:

```
471.omnetpp: basepeak = yes
```

```
473.astar: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast  
           -WOPT:if_conv=0 -WOPT:sib=on -CG:divrem_opt=on  
           -CG:p2align=1 -CG:dsched=on -GRA:optimize_boundary=on  
           -OPT:alias=disjoint -INLINE:aggressive=on  
           -IPA:small_pu=3000 -IPA:plimit=3000 -HP:bdt=2m:heap=2m  
           -march=bdver1
```

```
483.xalancbmk: -Ofast -LNO:prefetch=2 -OPT:unroll_size=512  
               -OPT:unroll_times_max=8 -D__OPEN64_FAST_SET  
               -INLINE:aggressive=on -m32 -CG:cmp_peep=on  
               -CG:local_sched=off -CG:p2align=1 -GRA:unspill=on  
               -TENV:frame_pointer=off -fno-emit-exceptions -march=bdver2  
               -mno-fma4  
               -L/root/work/libraries/SmartHeap-10/lib -lsmartheap
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-II.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-II.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 13:19:03 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 4 December 2012.