SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C22 M3 (Intel Xeon E5-2407, 2.20 GHz)

SPECfp®2006 = 51.8

SPECfp_base2006 = 50.2

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: Dec-2012
Hardware Availability: Sep-2012
Software Availability: Feb-2012

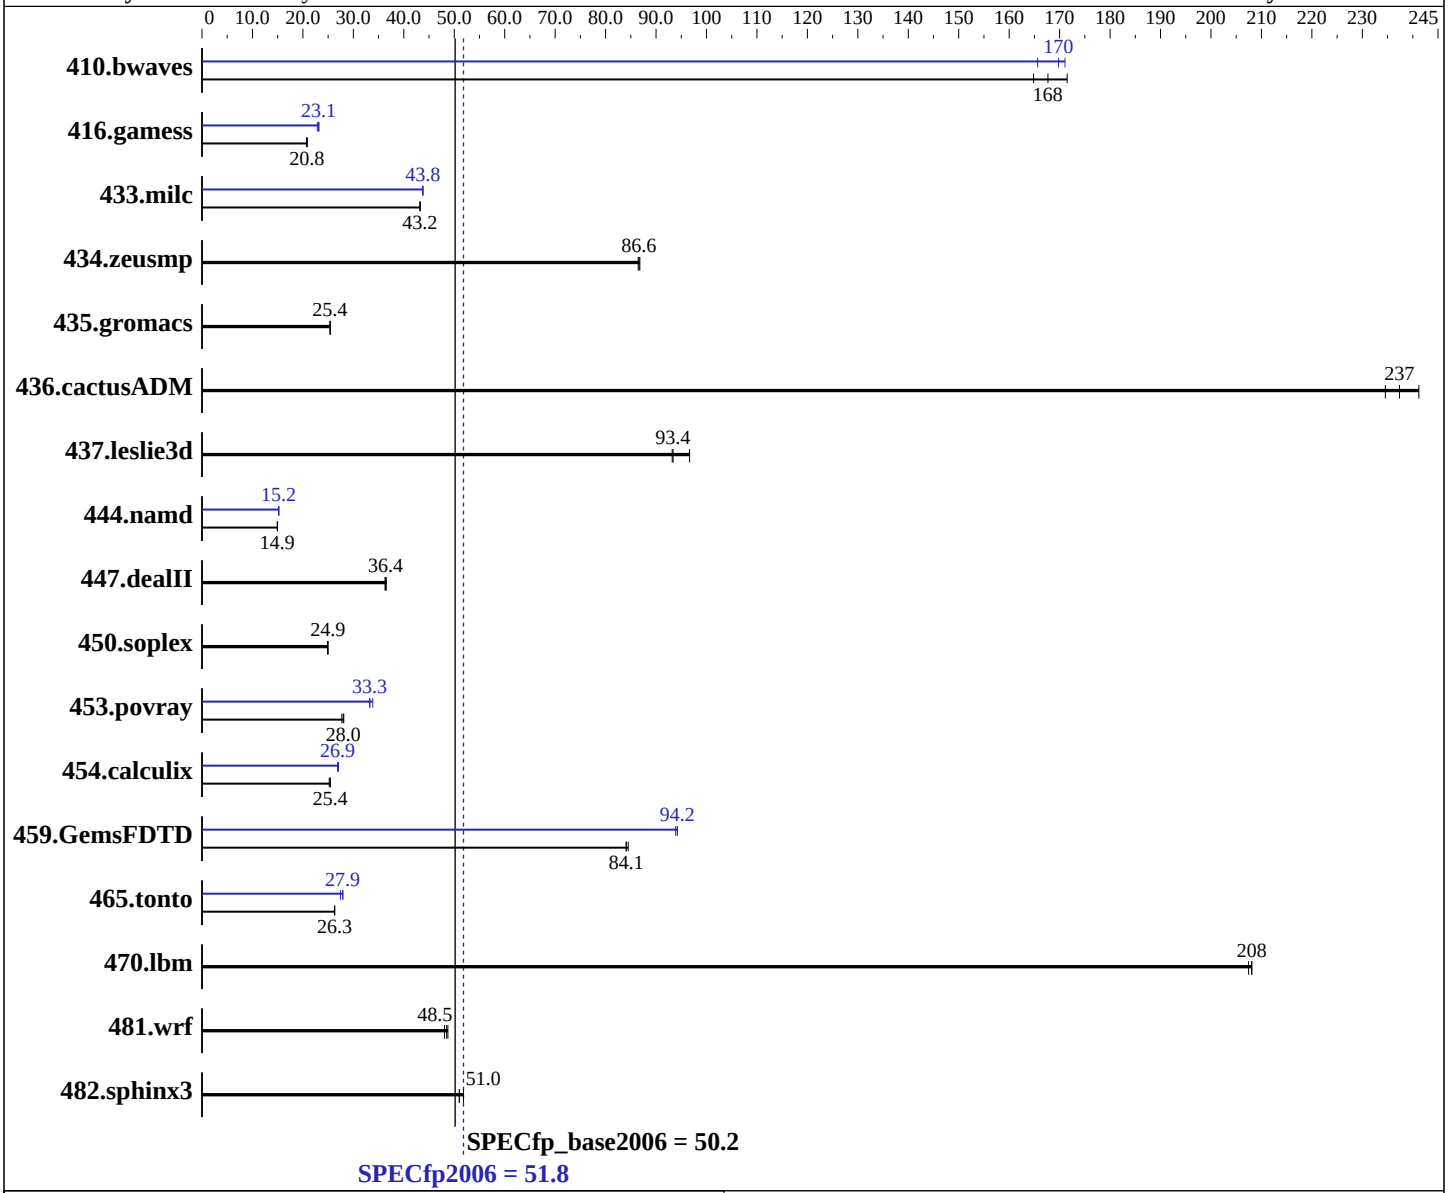

Hardware

CPU Name:	Intel Xeon E5-2407
CPU Characteristics:	
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.2 (Santiago) 2.6.32-220.el6.x86_64
Compiler:	C/C++: Version 12.1.3.293 of Intel C++ Studio XE for Linux; Fortran: Version 12.1.3.293 of Intel Fortran Studio XE for Linux
Auto Parallel:	Yes
File System:	ext4

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C22 M3 (Intel Xeon E5-2407, 2.20 GHz)

SPECfp2006 = 51.8

SPECfp_base2006 = 50.2

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: Dec-2012
Hardware Availability: Sep-2012
Software Availability: Feb-2012

L3 Cache: 10 MB I+D on chip per chip
Other Cache: None
Memory: 96 GB (12 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1067 MHz and CL7)
Disk Subsystem: 1 X 146 GB 15000 RPM SAS
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	79.2	171	82.4	165	**81.0**	**168**	82.0	166	**80.0**	**170**	79.4	171
416.gamess	944	20.7	940	20.8	**940**	**20.8**	856	22.9	**846**	**23.1**	845	23.2
433.milc	212	43.2	**212**	**43.2**	212	43.2	**210**	**43.8**	210	43.8	210	43.8
434.zeusmp	105	86.8	105	86.5	**105**	**86.6**	105	86.8	105	86.5	**105**	**86.6**
435.gromacs	281	25.4	281	25.4	**281**	**25.4**	281	25.4	281	25.4	**281**	**25.4**
436.cactusADM	**50.3**	**237**	49.5	241	50.9	235	**50.3**	**237**	49.5	241	50.9	235
437.leslie3d	**101**	**93.4**	101	93.2	97.3	96.7	**101**	**93.4**	101	93.2	97.3	96.7
444.namd	537	14.9	**537**	**14.9**	536	15.0	527	15.2	**527**	**15.2**	528	15.2
447.dealII	313	36.5	**314**	**36.4**	315	36.3	313	36.5	**314**	**36.4**	315	36.3
450.soplex	**334**	**24.9**	335	24.9	334	25.0	**334**	**24.9**	335	24.9	334	25.0
453.povray	192	27.7	189	28.1	**190**	**28.0**	160	33.2	**160**	**33.3**	157	33.8
454.calculix	325	25.4	**325**	**25.4**	327	25.2	**307**	**26.9**	307	26.9	305	27.1
459.GemsFDTD	**126**	**84.1**	126	84.5	126	84.1	113	94.2	113	93.9	**113**	**94.2**
465.tonto	374	26.3	**374**	**26.3**	375	26.3	358	27.5	**353**	**27.9**	353	27.9
470.lbm	66.2	207	**66.0**	**208**	66.0	208	66.2	207	**66.0**	**208**	66.0	208
481.wrf	**230**	**48.5**	232	48.1	229	48.7	**230**	**48.5**	232	48.1	229	48.7
482.sphinx3	376	51.8	382	51.0	**382**	**51.0**	376	51.8	382	51.0	**382**	**51.0**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6800
$Rev: 6800 $ $Date:: 2011-10-11 #$ 6f2ebdff5032aaa42e583f96b07f99d3
running on C22-M3 Thu Dec 20 23:08:16 2012

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
```

Continued on next page

Platform Notes (Continued)

```
      model name : Intel(R) Xeon(R) CPU E5-2407 0 @ 2.20GHz
         2 "physical id"s (chips)
         8 "processors"
      cores, siblings (Caution: counting these is hw and system dependent.  The
      following excerpts from /proc/cpuinfo might not be reliable.  Use with
      caution.)
         cpu cores : 4
         siblings  : 4
         physical 0: cores 0 1 2 3
         physical 1: cores 0 1 2 3
      cache size : 10240 KB

   From /proc/meminfo
      MemTotal:       99042904 kB
      HugePages_Total:       0
      Hugepagesize:       2048 kB

   /usr/bin/lsb_release -d
      Red Hat Enterprise Linux Server release 6.2 (Santiago)

   From /etc/*release* /etc/*version*
      redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
      system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
      system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

   uname -a:
      Linux C22-M3 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011 x86_64
      x86_64 x86_64 GNU/Linux

   run-level 3 Dec 20 22:47

   SPEC is set to: /opt/cpu2006-1.2
      Filesystem     Type    Size  Used Avail Use% Mounted on
      /dev/sda1      ext4    134G  9.9G  118G   8% /

   Additional information from dmidecode:
     Memory:
      12x 0xCE00 M393B1K70DH0-YK0 8 GB 1600 MHz 2 rank

   (End of data from sysinfo program)
```

General Notes

```
 Environment variables set by runspec before the start of the run:
 KMP_AFFINITY = "granularity=fine,compact,1,0"
 LD_LIBRARY_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64"
 OMP_NUM_THREADS = "8"

  Binaries compiled on a system with 2 X Intel Xeon E5-2690 CPU + 128 GB memory using RHEL 6.2
  Transparent Huge Pages enabled with:
  echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Continued on next page

General Notes (Continued)

```
Filesystem page cache cleared with:
echo 1>       /proc/sys/vm/drop_caches
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias
```

C++ benchmarks:
```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias
```

Continued on next page

Base Optimization Flags (Continued)

Fortran benchmarks:
`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Benchmarks using both Fortran and C:
`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch -ansi-alias`

Peak Compiler Invocation

C benchmarks:
`icc -m64`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

433.milc: `-xAVX`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-static -auto-ilp32 -ansi-alias`

470.lbm: `basepeak = yes`

482.sphinx3: `basepeak = yes`

C++ benchmarks:

444.namd: `-xAVX`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-fno-alias -auto-ilp32`

Continued on next page

Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C22 M3 (Intel Xeon E5-2407, 2.20 GHz)

SPECfp2006 = 51.8

SPECfp_base2006 = 50.2

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: Dec-2012
Hardware Availability: Sep-2012
Software Availability: Feb-2012

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 14:46:54 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 January 2013.