



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp®_rate2006 = 803

PowerEdge R815 (AMD Opteron 6376, 2.30 GHz)

SPECfp_rate_base2006 = 722

CPU2006 license: 55


Test date: Nov-2012

Test sponsor: Dell Inc.

Hardware Availability: Dec-2012

Tested by: Dell Inc.

Software Availability: Aug-2012

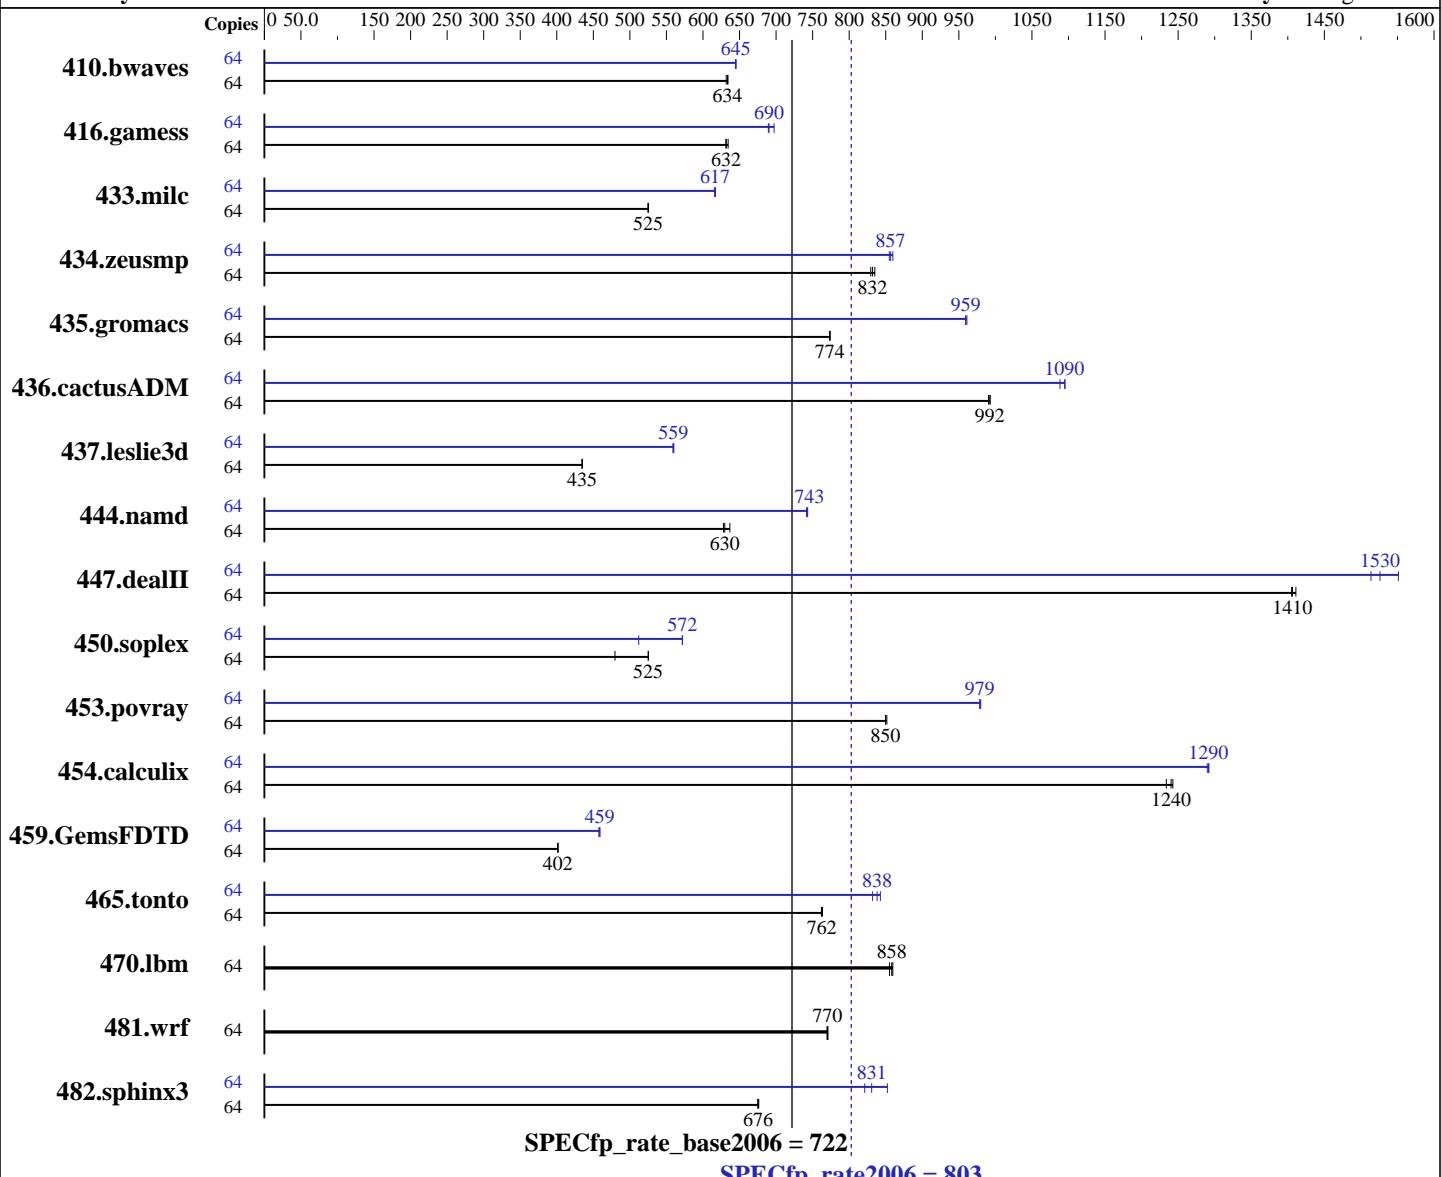

Hardware

CPU Name: AMD Opteron 6376
 CPU Characteristics: AMD Turbo CORE technology up to 3.20 GHz
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 64 cores, 4 chips, 16 cores/chip
 CPU(s) orderable: 2,4 chips

Software

Operating System: Red Hat Enterprise Linux Server release 6.3, Kernel 2.6.32-279.el6.x86_64
 Compiler: C/C++/Fortran: Version 4.5.2 of x86 Open64 Compiler Suite (from AMD)
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 803

PowerEdge R815 (AMD Opteron 6376, 2.30 GHz)

SPECfp_rate_base2006 = 722

CPU2006 license: 55

Test date: Nov-2012

Test sponsor: Dell Inc.

Hardware Availability: Dec-2012

Tested by: Dell Inc.

Software Availability: Aug-2012

Primary Cache:	512 KB I on chip per chip, 64 KB I shared / 2 cores; 16 KB D on chip per core	Other Software:	None
Secondary Cache:	16 MB I+D on chip per chip, 2 MB shared / 2 cores		
L3 Cache:	16 MB I+D on chip per chip, 8 MB shared / 8 cores		
Other Cache:	None		
Memory:	256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC)		
Disk Subsystem:	6 x 73 GB 7200 RPM SATA		
Other Hardware:	None		

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	64	1377	632	<u>1373</u>	<u>634</u>	1372	634	64	<u>1348</u>	<u>645</u>	1348	645	1350	644
416.gamess	64	<u>1983</u>	<u>632</u>	1975	634	1985	631	64	1818	689	<u>1815</u>	<u>690</u>	1797	697
433.milc	64	<u>1119</u>	<u>525</u>	1120	525	1118	525	64	<u>952</u>	<u>617</u>	<u>952</u>	<u>617</u>	954	616
434.zeusmp	64	<u>700</u>	<u>832</u>	697	835	702	830	64	677	860	<u>680</u>	<u>857</u>	681	855
435.gromacs	64	591	773	590	774	<u>591</u>	<u>774</u>	64	476	959	476	961	<u>476</u>	<u>959</u>
436.cactusADM	64	770	993	<u>771</u>	<u>992</u>	772	991	64	698	1100	703	1090	<u>699</u>	<u>1090</u>
437.leslie3d	64	1383	435	1384	435	<u>1384</u>	<u>435</u>	64	1074	560	<u>1075</u>	<u>559</u>	1076	559
444.namd	64	817	628	806	637	<u>815</u>	<u>630</u>	64	<u>691</u>	<u>743</u>	691	743	692	742
447.dealII	64	<u>521</u>	<u>1410</u>	521	1410	519	1410	64	<u>480</u>	<u>1530</u>	472	1550	484	1510
450.soplex	64	1113	480	<u>1016</u>	<u>525</u>	1016	525	64	1042	512	<u>934</u>	<u>572</u>	933	572
453.povray	64	400	851	<u>401</u>	<u>850</u>	401	850	64	348	979	<u>348</u>	<u>979</u>	347	980
454.calculix	64	<u>426</u>	<u>1240</u>	428	1230	425	1240	64	409	1290	409	1290	<u>409</u>	<u>1290</u>
459.GemsFDTD	64	<u>1691</u>	<u>402</u>	1691	402	1692	401	64	1479	459	<u>1480</u>	<u>459</u>	1484	458
465.tonto	64	826	762	<u>826</u>	<u>762</u>	825	763	64	757	832	<u>751</u>	<u>838</u>	747	843
470.lbm	64	<u>1025</u>	<u>858</u>	1028	855	1023	860	64	<u>1025</u>	<u>858</u>	1028	855	1023	860
481.wrf	64	927	771	929	770	<u>928</u>	<u>770</u>	64	927	771	929	770	<u>928</u>	<u>770</u>
482.sphinx3	64	1844	676	1848	675	<u>1846</u>	<u>676</u>	64	1519	821	<u>1501</u>	<u>831</u>	1464	852

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent_hugepage=never as a boot parameter in /boot/grub/menu.lst
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R815 (AMD Opteron 6376, 2.30 GHz)

SPECfp_rate2006 = 803

SPECfp_rate_base2006 = 722

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Nov-2012

Hardware Availability: Dec-2012

Software Availability: Aug-2012

Operating System Notes (Continued)

```
Set vm/nr_hugepages=57344 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages
```

General Notes

Environment variables set by runspec before the start of the run:

```
HUGETLB_LIMIT = "896"  
LD_LIBRARY_PATH = "/root/cpu2006-1.2/amd1206-rate-libs-revA/32:/root/cpu2006-1.2/amd1206-rate-libs-revA/64"
```

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
<http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6386SE chips + 128GB Memory using RHEL 6.3

Base Compiler Invocation

C benchmarks:

opencc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

opencc openf95

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64  
416.gamess: -DSPEC_CPU_LP64  
    433.milc: -DSPEC_CPU_LP64  
434.zeusmp: -DSPEC_CPU_LP64  
435.gromacs: -DSPEC_CPU_LP64  
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore  
437.leslie3d: -DSPEC_CPU_LP64  
    444.namd: -DSPEC_CPU_LP64  
    447.dealII: -DSPEC_CPU_LP64  
    450.soplex: -DSPEC_CPU_LP64  
    453.povray: -DSPEC_CPU_LP64  
    454.calculix: -DSPEC_CPU_LP64  
459.GemsFDTD: -DSPEC_CPU_LP64  
    465.tonto: -DSPEC_CPU_LP64  
    470.lbm: -DSPEC_CPU_LP64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R815 (AMD Opteron 6376, 2.30 GHz)

SPECfp_rate2006 = 803

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Nov-2012

Hardware Availability: Dec-2012

Software Availability: Aug-2012

Base Portability Flags (Continued)

481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
-fno-second-underscore

482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000
-IPA:small_pu=100 -mso -march=bdver1

C++ benchmarks:

-Ofast -static -CG:load_exe=0 -OPT:malloc_alg=1 -INLINE:aggressive=on
-HP:bd=2m:heap=2m -D__OPEN64_FAST_SET -march=bdver1

Fortran benchmarks:

-Ofast -LNO:blocking=off -LNO:simd_peel_align=on -OPT:rsqrt=2
-OPT:unroll_size=256 -HP:bd=2m:heap=2m -mso -march=bdver1

Benchmarks using both Fortran and C:

-Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000
-IPA:small_pu=100 -mso -march=bdver1 -LNO:blocking=off
-LNO:simd_peel_align=on -OPT:rsqrt=2 -OPT:unroll_size=256

Peak Compiler Invocation

C benchmarks:

opencc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

opencc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R815 (AMD Opteron 6376, 2.30 GHz)

SPECfp_rate2006 = 803

SPECfp_rate_base2006 = 722

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Nov-2012

Hardware Availability: Dec-2012

Software Availability: Aug-2012

Peak Portability Flags (Continued)

```

435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
          -fno-second-underscore

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -Ofast -CG:movnti=1 -CG:locs_best=on -HP:bdt=2m:heap=2m
           -IPA:plimit=7000 -IPA:callee_limit=1200
           -OPT:struct_array_copy=2 -OPT:alias=field_sensitive -mso
           -march=bdver1

```

470.lbm: basepeak = yes

```

482.sphinx3: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
              -m32 -IPA:plimit=1000 -OPT:malloc_alg=2 -CG:cmp_peep=on
              -CG:p2align=0 -CG:load_exe=1 -CG:dsched=on
              -INLINE:aggressive=on -LNO:prefetch=2 -LNO:prefetch_ahead=4
              -mso -march=bdver2

```

C++ benchmarks:

```

444.namd: -Ofast -IPA:plimit=3000 -LNO:ignore_feedback=off
           -CG:local_sched_alg=0 -CG:load_exe=0 -OPT:unroll_size=256
           -fno-exceptions -HP:bdt=2m:heap=2m -LNO:if_select_conv=1
           -OPT:alias=disjoint -LNO:psimd_iso_unroll=ON -march=bdver1

```

```

447.dealII: -Ofast -D__OPEN64_FAST_SET -static -INLINE:aggressive=on
              -LNO:opt=1 -LNO:simd=2 -fno-emit-exceptions -m32
              -OPT:unroll_times_max=8 -OPT:unroll_size=256
              -OPT:unroll_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on
              -CG:cmp_peep=on -CG:movext_icmp=off -TENV:frame_pointer=off
              -march=bdver1

```

```

450.soplex: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
              -LNO:ignore_feedback=off -INLINE:aggressive=on -OPT:RO=1
              -OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
              -OPT:fold_unsigned_relops=on -fno-exceptions -CG:p2align=0
              -m32 -mno-fma4 -HP:bdt=2m:heap=2m -WOPT:sib=on
              -march=bdver1

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R815 (AMD Opteron 6376, 2.30 GHz)

SPECfp_rate2006 = 803

SPECfp_rate_base2006 = 722

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Nov-2012

Hardware Availability: Dec-2012

Software Availability: Aug-2012

Peak Optimization Flags (Continued)

```
453.povray: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
             -CG:pre_local_sched=off -CG:p2align=0 -CG:p2align_split=on
             -CG:dsched=on -INLINE:aggressive=on -HP:bdt=2m:heap=2m
             -OPT:transform=2 -OPT:alias=disjoint -WOPT:aggcm=0
             -march=bdver2
```

Fortran benchmarks:

```
410.bwaves: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
             -OPT:Ofast -OPT:treeheight=on -LNO:blocking=off
             -LNO:ignore_feedback=off -LNO:fu=4 -LNO:loop_model_simd=on
             -LNO:simd_rm_unity_remainder=on -WOPT:agstr=0
             -HP:bdt=2m:heap=2m -CG:cmp_peep=on -march=bdver1
```

```
416.gamess: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
             -LNO:fu=6 -LNO:blocking=0 -LNO:simd=2 -OPT:ro=3
             -OPT:recip=on -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m
             -WOPT:sib=on -march=bdver1
```

```
434.zeusmp: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
             -LNO:blocking=off -LNO:interchange=off -IPA:plimit=1500
             -HP:bdt=2m:heap=2m -march=bdver1
```

```
437.leslie3d: -Ofast -CG:pre_minreg_level=2 -LNO:simd=0 -LNO:fusion=2
               -HP:bdt=2m:heap=2m -mso -march=bdver1
```

```
459.GemsFDTD: -Ofast -IPA:plimit=1500 -OPT:unroll_size=1024
                -OPT:unroll_times_max=16 -LNO:fission=2
                -CG:local_sched_alg=2 -HP -march=bdver1
```

```
465.tonto: -Ofast -OPT:alias=no_f90_pointer_alias -LNO:blocking=off
            -CG:load_exe=1 -CG:local_sched_alg=3 -IPA:plimit=525
            -HP:bdt=2m:heap=2m -march=bdver1
```

Benchmarks using both Fortran and C:

```
435.gromacs: -Ofast -OPT:rsqrt=2 -HP:bdt=2m:heap=2m
              -CG:local_sched_alg=2 -CG:load_exe=3 -GRA:unspill=on
              -march=bdver1 -LNO:simd=3
```

```
436.cactusADM: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
                 -LNO:blocking=off -LNO:prefetch=2 -LNO:pf2=0
                 -LNO:prefetch_ahead=4 -HP -CG:locs_shallow_depth=1
                 -CG:load_exe=0 -CG:dsched=on -WOPT:sib=on -march=bdver1
```

```
454.calculix: -Ofast -OPT:unroll_size=256 -OPT:alias=disjoint
                -GRA:optimize_boundary=on -CG:dsched=on -HP:bdt=2m:heap=2m
                -march=bdver1
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 803

PowerEdge R815 (AMD Opteron 6376, 2.30 GHz)

SPECfp_rate_base2006 = 722

CPU2006 license: 55

Test date: Nov-2012

Test sponsor: Dell Inc.

Hardware Availability: Dec-2012

Tested by: Dell Inc.

Software Availability: Aug-2012

Peak Optimization Flags (Continued)

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-II.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-II.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 14:45:29 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 29 January 2013.