SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Tecal RH5885 V2 (8-sockets, Intel Xeon E7-8837)

SPECint®_rate2006 = 1660

SPECint_rate_base2006 = 1590

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Jan-2013
Hardware Availability: Dec-2012
Software Availability: Oct-2012

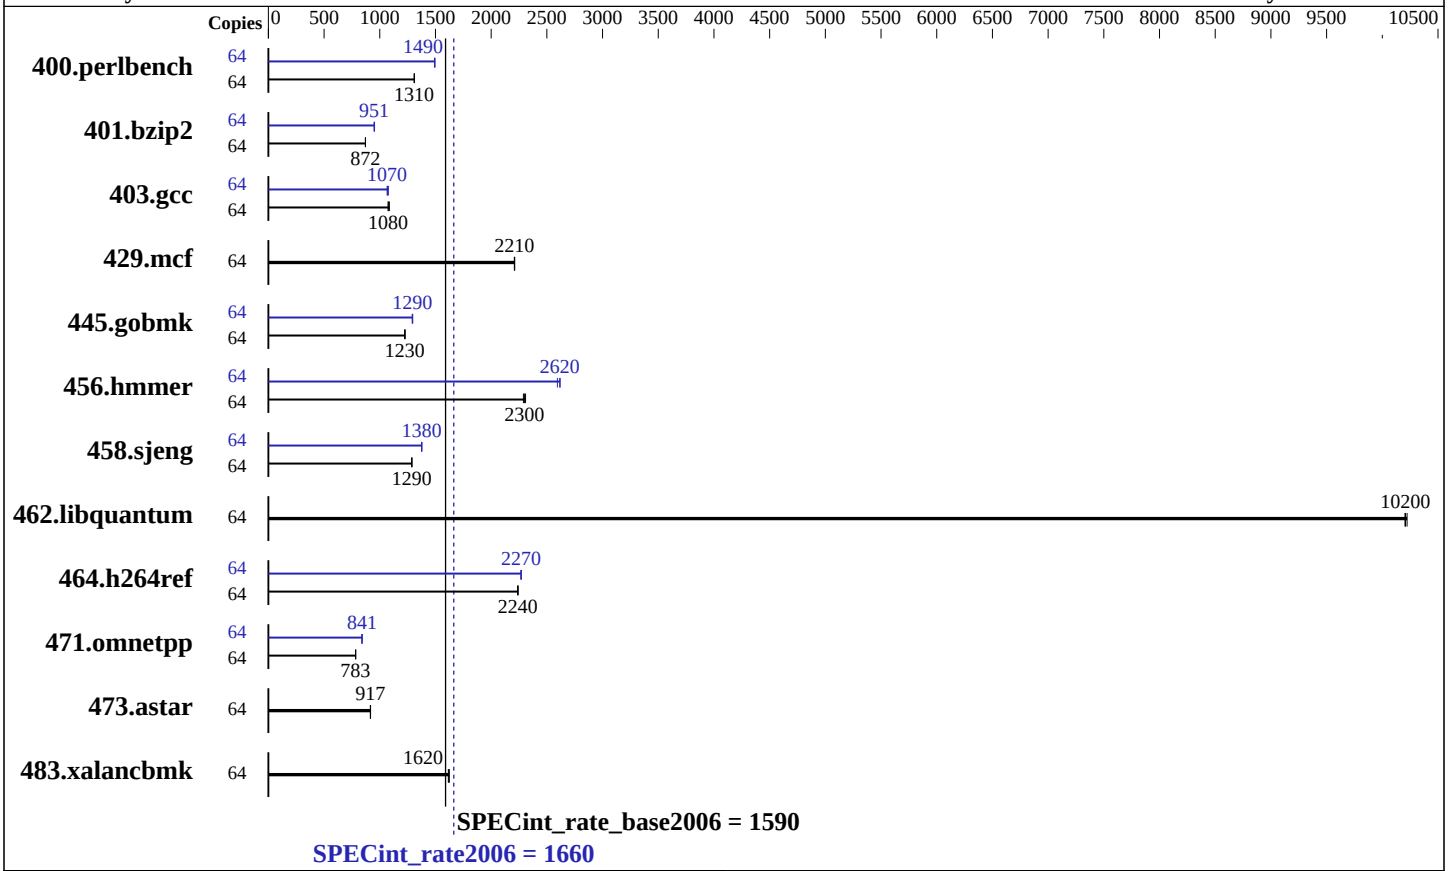

Hardware

CPU Name:	Intel Xeon E7-8837
CPU Characteristics:	Intel Turbo Boost Technology up to 2.80 GHz
CPU MHz:	2667
FPU:	Integrated
CPU(s) enabled:	64 cores, 8 chips, 8 cores/chip
CPU(s) orderable:	8 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	24 MB I+D on chip per chip
Other Cache:	None
Memory:	2 TB (128 x 16 GB 4Rx4 PC3-10600R-9, ECC, running at 1066 MHz)
Disk Subsystem:	2 x 500 GB (SATA, 7200RPM, RAID1)
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.2 (Santiago) 2.6.32-220.el6.x86_64
Compiler:	C/C++: Version 13.0.0.079 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V9.01

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Tecal RH5885 V2 (8-sockets, Intel Xeon E7-8837)

SPECint_rate2006 = 1660

SPECint_rate_base2006 = 1590

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Jan-2013
Hardware Availability: Dec-2012
Software Availability: Oct-2012

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	477	1310	**477**	**1310**	478	1310	64	418	1500	**419**	**1490**	419	1490
401.bzip2	64	**708**	**872**	708	872	710	870	64	**649**	**951**	651	949	648	953
403.gcc	64	474	1090	**479**	**1080**	479	1080	64	478	1080	**482**	**1070**	483	1070
429.mcf	64	264	2210	**264**	**2210**	264	2210	64	264	2210	**264**	**2210**	264	2210
445.gobmk	64	**548**	**1230**	548	1220	547	1230	64	**519**	**1290**	518	1300	520	1290
456.hmmer	64	**260**	**2300**	259	2310	261	2290	64	**228**	**2620**	228	2620	230	2590
458.sjeng	64	601	1290	602	1290	**601**	**1290**	64	**563**	**1380**	563	1380	562	1380
462.libquantum	64	130	10200	**130**	**10200**	130	10200	64	130	10200	**130**	**10200**	130	10200
464.h264ref	64	633	2240	632	2240	**633**	**2240**	64	624	2270	625	2270	**624**	**2270**
471.omnetpp	64	**511**	**783**	510	784	511	783	64	476	841	**476**	**841**	476	840
473.astar	64	490	917	491	915	**490**	**917**	64	490	917	491	915	**490**	**917**
483.xalancbmk	64	272	1620	273	1620	**272**	**1620**	64	272	1620	273	1620	**272**	**1620**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS configuration:
Power Technology set to Custom, Performance/Watt set to Traditional
Sysinfo program /home/cpu2006/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ 5569a0425e2ad530534e4c79a46e4d28
running on 5885-8P-15 Tue Jan 29 11:27:51 2013

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E7- 8837 @ 2.67GHz
      8 "physical id"s (chips)
      64 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
```

Continued on next page

Platform Notes (Continued)

```
        cpu cores : 8
        siblings  : 8
        physical 0: cores 0 1 2 9 16 18 24 25
        physical 1: cores 0 1 2 8 17 18 24 25
        physical 2: cores 0 1 2 8 17 18 24 25
        physical 3: cores 0 1 2 8 17 18 24 25
        physical 4: cores 0 1 2 8 17 18 24 25
        physical 5: cores 0 1 2 8 17 18 24 25
        physical 6: cores 0 1 2 8 17 18 24 25
        physical 7: cores 0 1 2 8 17 18 24 25
     cache size : 24576 KB

  From /proc/meminfo
     MemTotal:       2117601240 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /usr/bin/lsb_release -d
     Red Hat Enterprise Linux Server release 6.2 (Santiago)

  From /etc/*release* /etc/*version*
     redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
     system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
     system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

  uname -a:
     Linux 5885-8P-15 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
     x86_64 x86_64 x86_64 GNU/Linux

  run-level 3 Jan 29 11:21

  SPEC is set to: /home/cpu2006
     Filesystem     Type    Size  Used Avail Use% Mounted on
     /dev/mapper/vg_58858p15-lv_home
                    ext4    434G   14G  398G   4% /home

  Additional information from dmidecode:
    BIOS American Megatrends Inc. RGPUC-BIOS-V052 01/16/2013
    Memory:
     128x   16 GB
     128x Hyundai HMT42GR7BMR4C-H9 16 GB 1067 MHz 4 rank

  (End of data from sysinfo program)
     Descriptions about memory generated by sysinfo are not correct,
     only 128 DIMMs are installed not 256, see descriptions below.
     Memory:
      128x Hyundai HMT42GR7BMR4C-H9 16 GB 1067 MHz 4 rank
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"

 Binaries compiled on a system with 4x Xeon E7-8870 CPU + 1024GB
 memory using RHEL6.2
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
icc  -m32
```

C++ benchmarks:
```
icpc -m32
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
```

C++ benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/home/cpu2006/smartheap -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:
icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32

Continued on next page

Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/home/cpu2006/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html
http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revG.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml
http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revG.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 15:17:56 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 February 2013.