



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

**SPECint®\_rate2006 = 526**

Altos R360 F2 (Intel Xeon E5-2650)

**SPECint\_rate\_base2006 = 508**

CPU2006 license: 97


Test date: May-2013

Test sponsor: Acer Incorporated

Hardware Availability: May-2013

Tested by: Acer Incorporated

Software Availability: Feb-2013

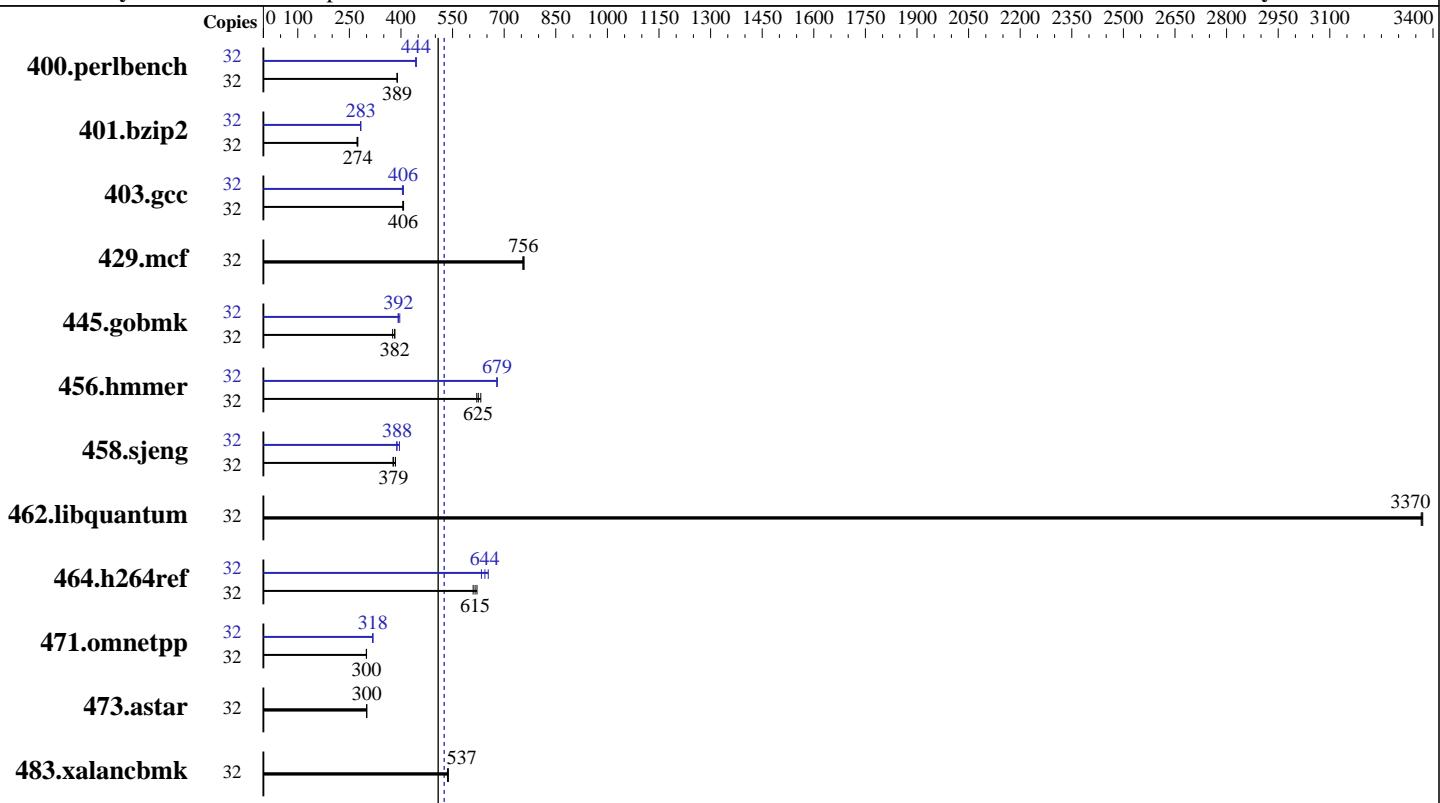

**SPECint\_rate\_base2006 = 508**

**SPECint\_rate2006 = 526**

## Hardware

CPU Name: Intel Xeon E5-2650  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 1Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 1 x 300 GB SAS, 10K RPM  
 Other Hardware: None

## Software

Operating System: Red Hat Enterprise Linux Server release 6.3 (Santiago)  
 Compiler: 2.6.32-279.el6.x86\_64  
 Auto Parallel: C/C++: Version 13.0.0.133 of Intel C++ Studio XE for Linux  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

**SPECint\_rate2006 = 526**

Altos R360 F2 (Intel Xeon E5-2650)

**SPECint\_rate\_base2006 = 508**

CPU2006 license: 97

Test date: May-2013

Test sponsor: Acer Incorporated

Hardware Availability: May-2013

Tested by: Acer Incorporated

Software Availability: Feb-2013

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	803	390	<b>804</b>	<b>389</b>	804	389	32	706	443	<b>704</b>	<b>444</b>	703	444
401.bzip2	32	1126	274	1134	272	<b>1126</b>	<b>274</b>	32	1091	283	<b>1092</b>	<b>283</b>	1093	283
403.gcc	32	632	408	<b>634</b>	<b>406</b>	635	406	32	633	407	<b>634</b>	<b>406</b>	637	404
429.mcf	32	385	758	387	754	<b>386</b>	<b>756</b>	32	385	758	387	754	<b>386</b>	<b>756</b>
445.gobmk	32	893	376	879	382	<b>879</b>	<b>382</b>	32	847	397	<b>856</b>	<b>392</b>	856	392
456.hammer	32	481	620	472	632	<b>478</b>	<b>625</b>	32	439	679	440	679	<b>440</b>	<b>679</b>
458.sjeng	32	1027	377	1008	384	<b>1023</b>	<b>379</b>	32	997	388	999	388	979	396
462.libquantum	32	<b>197</b>	<b>3370</b>	197	3370	197	3370	32	<b>197</b>	<b>3370</b>	197	3370	197	3370
464.h264ref	32	1161	610	<b>1151</b>	<b>615</b>	1140	621	32	1117	634	1083	654	<b>1100</b>	<b>644</b>
471.omnetpp	32	667	300	<b>668</b>	<b>300</b>	668	299	32	629	318	<b>629</b>	<b>318</b>	629	318
473.astar	32	749	300	<b>748</b>	<b>300</b>	748	300	32	749	300	<b>748</b>	<b>300</b>	748	300
483.xalancbmk	32	<b>411</b>	<b>537</b>	411	537	413	535	32	<b>411</b>	<b>537</b>	411	537	413	535

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

```
Sysinfo program /usr/cpu2006/config/sysinfo.rev6818
$Rev: 6818 $ $Date::: 2012-07-17 #$
running on altosr380f2-2 Sat May 25 09:30:46 2013
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2650 0 @ 2.00GHz
        2 "physical id"s (chips)
        32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 8
        siblings  : 16
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint\_rate2006 = 526

Altos R360 F2 (Intel Xeon E5-2650)

SPECint\_rate\_base2006 = 508

CPU2006 license: 97

Test date: May-2013

Test sponsor: Acer Incorporated

Hardware Availability: May-2013

Tested by: Acer Incorporated

Software Availability: Feb-2013

## Platform Notes (Continued)

```
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB

From /proc/meminfo
MemTotal:      132078152 kB
HugePages_Total:      0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.3 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux altosr380f2-2 2.6.32-279.el6.x86_64 #1 SMP Wed Jun 13 18:24:36 EDT 2012
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 May 25 09:29

SPEC is set to: /usr/cpu2006
Filesystem      Type    Size  Used Avail Use% Mounted on
/dev/mapper/vg_altosr380f22-lv_root
                  ext4    820G   33G  745G   5%  /


Additional information from dmidecode:
BIOS Intel Corp. SE5C600.86B.01.06.0002.110120121539 11/01/2012
Memory:
 16x 8 GB
 8x NO DIMM NO DIMM
 16x Nanya NT8GC72B4PB0NL-DI 8 GB 1600 MHz 1 rank

(End of data from sysinfo program)
```

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enable

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Altos R360 F2 and Altos R380 F2 are electronically equivalent.

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

Altos R360 F2 (Intel Xeon E5-2650)

**SPECint\_rate2006 = 526**

**SPECint\_rate\_base2006 = 508**

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: May-2013

Hardware Availability: May-2013

Software Availability: Feb-2013

## General Notes (Continued)

This result was measured on Altos R380 F2.

## Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

Altos R360 F2 (Intel Xeon E5-2650)

SPECint\_rate2006 = 526

SPECint\_rate\_base2006 = 508

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: May-2013

Hardware Availability: May-2013

Software Availability: Feb-2013

## Peak Compiler Invocation (Continued)

458.sjeng: icc -m64

C++ benchmarks:  
icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
-auto-ilp32 -ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xAVX -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14  
-auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll12  
-ansi-alias

C++ benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint\_rate2006 = 526

Altos R360 F2 (Intel Xeon E5-2650)

SPECint\_rate\_base2006 = 508

CPU2006 license: 97

Test date: May-2013

Test sponsor: Acer Incorporated

Hardware Availability: May-2013

Tested by: Acer Incorporated

Software Availability: Feb-2013

## Peak Optimization Flags (Continued)

```
471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias
             -opt-ra-region-strategy=block -Wl,-z,muldefs
             -L/sh -lsmartheap
```

```
473.astar: basepeak = yes
```

```
483.xalancbmk: basepeak = yes
```

## Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.html>  
<http://www.spec.org/cpu2006/flags/Acer-Platform-Settings-V1.2-revA.20130423.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.xml>  
<http://www.spec.org/cpu2006/flags/Acer-Platform-Settings-V1.2-revA.20130423.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 15:54:58 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 18 June 2013.