



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

SPECfp<sup>®</sup>2006 = **66.2**

ASUS RS700-E7(Z9PP-D24) Server System  
(Intel Xeon E5-2620)

SPECfp\_base2006 = **62.9**

CPU2006 license: 9016


Test date: Jun-2013

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: May-2012

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2011

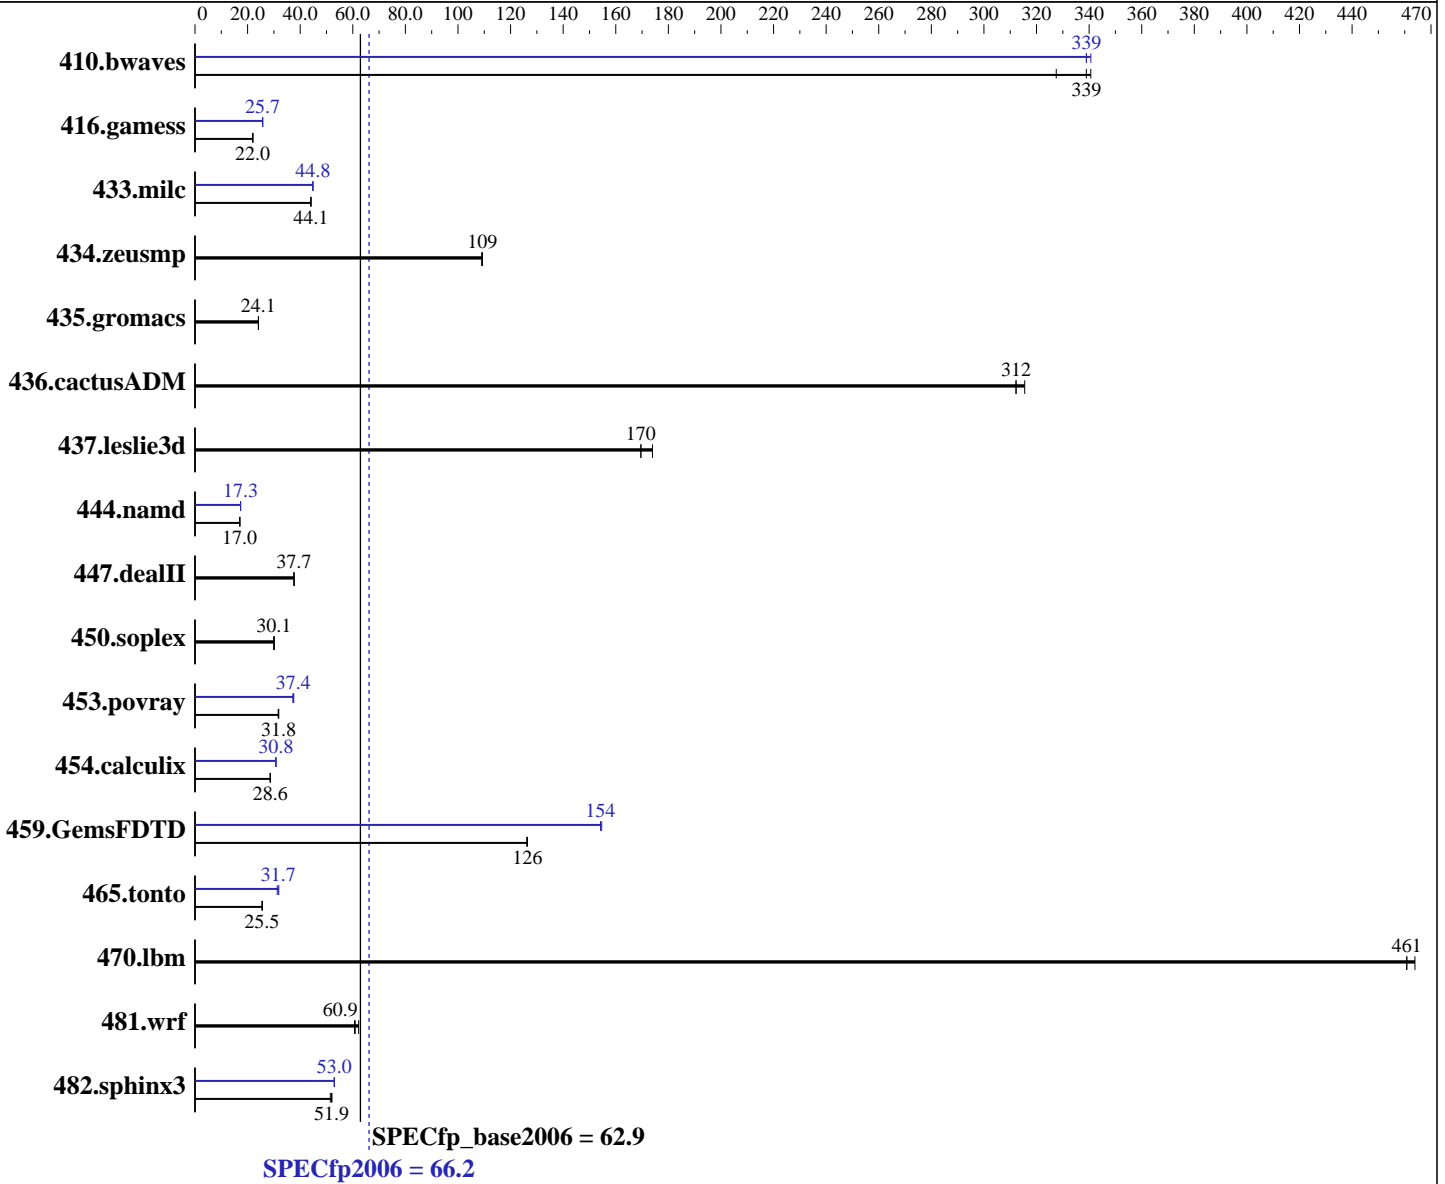

### Hardware

CPU Name: Intel Xeon E5-2620  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.50 GHz  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

SPECfp2006 = **66.2**

ASUS RS700-E7(Z9PP-D24) Server System  
(Intel Xeon E5-2620)

SPECfp\_base2006 = **62.9**

CPU2006 license: 9016

Test date: Jun-2013

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: May-2012

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2011

L3 Cache: 15 MB I+D on chip per chip  
Other Cache: None  
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
Disk Subsystem: HITACHI HDP725050GLA380 1 x 500 GB SATA, 7200 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	41.5	327	39.9	341	<b>40.1</b>	<b>339</b>	39.9	341	40.1	339	<b>40.1</b>	<b>339</b>
416.gamess	894	21.9	<b>892</b>	<b>22.0</b>	888	22.1	760	25.7	<b>761</b>	<b>25.7</b>	761	25.7
433.milc	<b>208</b>	<b>44.1</b>	208	44.1	208	44.1	<b>205</b>	<b>44.8</b>	205	44.8	205	44.8
434.zeusmp	83.3	109	<b>83.3</b>	<b>109</b>	83.5	109	83.3	109	<b>83.3</b>	<b>109</b>	83.5	109
435.gromacs	296	24.1	<b>296</b>	<b>24.1</b>	296	24.1	296	24.1	<b>296</b>	<b>24.1</b>	296	24.1
436.cactusADM	38.3	312	<b>38.3</b>	<b>312</b>	37.9	315	38.3	312	<b>38.3</b>	<b>312</b>	37.9	315
437.leslie3d	<b>55.4</b>	<b>170</b>	54.0	174	55.4	170	<b>55.4</b>	<b>170</b>	54.0	174	55.4	170
444.namd	471	17.0	471	17.0	<b>471</b>	<b>17.0</b>	462	17.3	463	17.3	<b>462</b>	<b>17.3</b>
447.dealII	304	37.7	304	37.7	<b>304</b>	<b>37.7</b>	304	37.7	304	37.7	<b>304</b>	<b>37.7</b>
450.soplex	279	29.9	276	30.2	<b>277</b>	<b>30.1</b>	279	29.9	276	30.2	<b>277</b>	<b>30.1</b>
453.povray	<b>167</b>	<b>31.8</b>	167	31.8	168	31.6	142	37.6	<b>142</b>	<b>37.4</b>	143	37.2
454.calculix	<b>288</b>	<b>28.6</b>	288	28.7	288	28.6	268	30.8	269	30.7	<b>268</b>	<b>30.8</b>
459.GemsFDTD	83.9	126	84.1	126	<b>83.9</b>	<b>126</b>	68.8	154	68.6	155	<b>68.8</b>	<b>154</b>
465.tonto	384	25.6	386	25.5	<b>385</b>	<b>25.5</b>	315	31.3	309	31.9	<b>311</b>	<b>31.7</b>
470.lbm	29.6	464	<b>29.8</b>	<b>461</b>	29.8	461	29.6	464	<b>29.8</b>	<b>461</b>	29.8	461
481.wrf	180	62.2	<b>183</b>	<b>60.9</b>	184	60.7	180	62.2	<b>183</b>	<b>60.9</b>	184	60.7
482.sphinx3	379	51.5	<b>375</b>	<b>51.9</b>	374	52.1	368	52.9	367	53.1	<b>368</b>	<b>53.0</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Sysinfo program /cpu2006/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on localhost.localdomain Sat Jun 15 07:13:21 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-2620 0 @ 2.00GHz  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

SPECfp2006 = 66.2

ASUS RS700-E7(Z9PP-D24) Server System  
(Intel Xeon E5-2620)

SPECfp\_base2006 = 62.9

CPU2006 license: 9016

Test date: Jun-2013

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: May-2012

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2011

### Platform Notes (Continued)

```

2 "physical id"s (chips)
24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 6
siblings  : 12
physical 0: cores 0 1 2 3 4 5
physical 1: cores 0 1 2 3 4 5
cache size : 15360 KB

From /proc/meminfo
MemTotal:      132243972 kB
HugePages_Total: 0
Hugepagesize:  2048 kB

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux localhost.localdomain 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13
EST 2011 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jun 14 22:56

SPEC is set to: /cpu2006
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sdal       ext4      459G  12G  424G   3% /

Additional information from dmidecode:
Memory:
16x Apacer 78.C1GEY.AF10C 8 GB 1600 MHz 2 rank

(End of data from sysinfo program)

```

### General Notes

Environment variables set by runspec before the start of the run:

```

KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/cpu2006/libs/32:/cpu2006/libs/64"
OMP_NUM_THREADS = "12"

```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

**SPECfp2006 = 66.2**

ASUS RS700-E7(Z9PP-D24) Server System  
(Intel Xeon E5-2620)

**SPECfp\_base2006 = 62.9**

**CPU2006 license:** 9016

**Test date:** Jun-2013

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** May-2012

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Dec-2011

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

**SPECfp2006 = 66.2**

ASUS RS700-E7(Z9PP-D24) Server System  
(Intel Xeon E5-2620)

**SPECfp\_base2006 = 62.9**

**CPU2006 license:** 9016

**Test date:** Jun-2013

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** May-2012

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Dec-2011

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

**SPECfp2006 = 66.2**

ASUS RS700-E7(Z9PP-D24) Server System  
(Intel Xeon E5-2620)

**SPECfp\_base2006 = 62.9**

**CPU2006 license:** 9016

**Test date:** Jun-2013

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** May-2012

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Dec-2011

## Peak Optimization Flags (Continued)

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 16:35:59 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 8 July 2013.