SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM Flex System x222
(Intel Xeon E5-2450, 2.10 GHz)

SPECint®2006 = 46.5

SPECint_base2006 = 43.4

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jun-2013
Hardware Availability: Sep-2013
Software Availability: Oct-2012

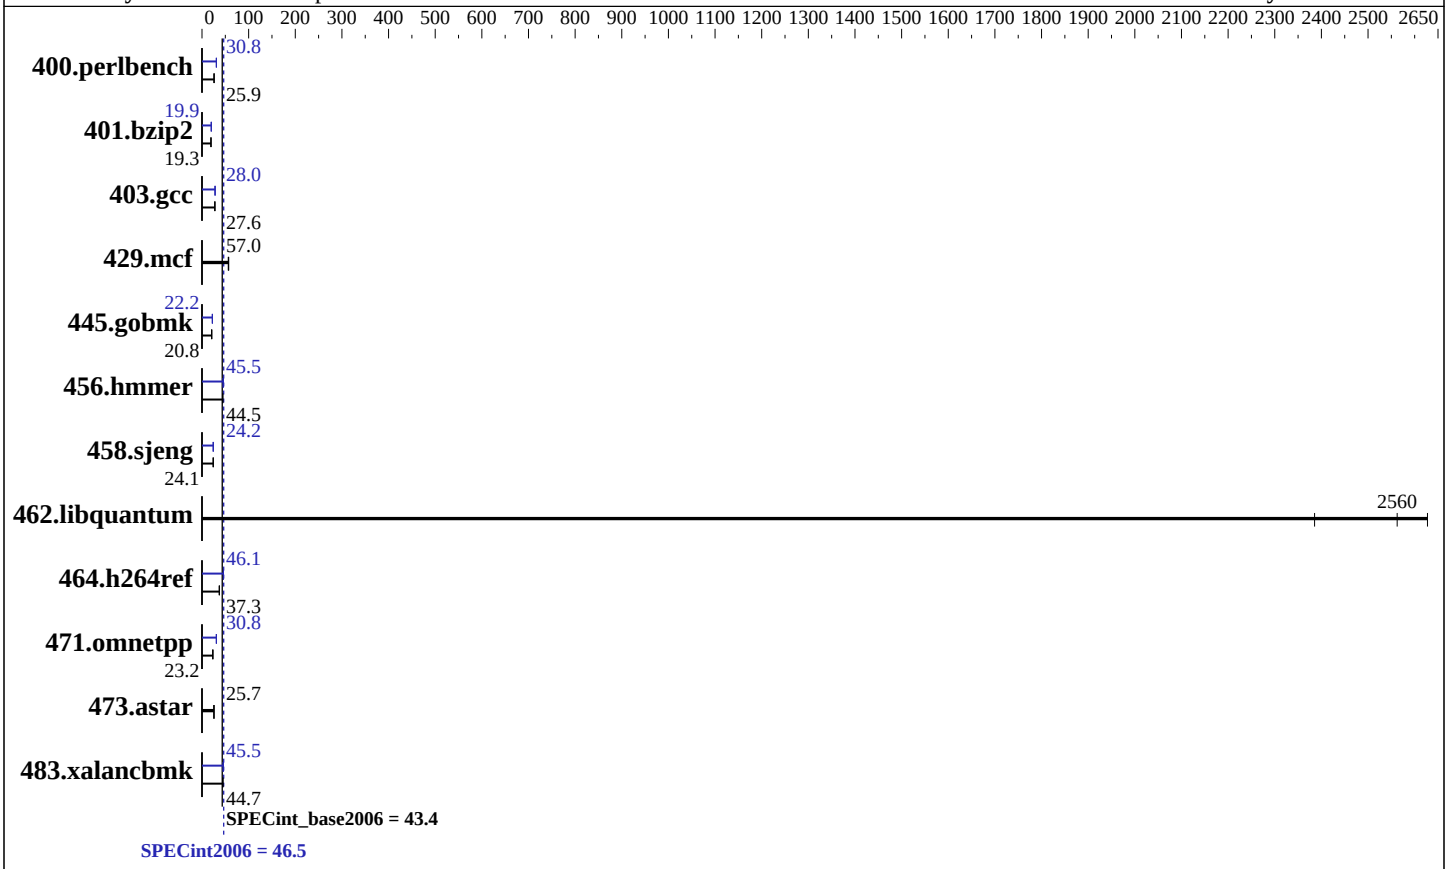

Hardware

CPU Name:	Intel Xeon E5-2450
CPU Characteristics:	Intel Turbo Boost Technology up to 2.90 GHz
CPU MHz:	2100
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	20 MB I+D on chip per chip
Other Cache:	None
Memory:	96 GB (12 x 8 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem:	1 x 100 GB SATA, SSD
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.2 (Santiago) 2.6.32-220.el6.x86_64
Compiler:	C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux
Auto Parallel:	Yes
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V9.01

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM Flex System x222
(Intel Xeon E5-2450, 2.10 GHz)

SPECint2006 = 46.5

SPECint_base2006 = 43.4

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jun-2013
Hardware Availability: Sep-2013
Software Availability: Oct-2012

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	376	26.0	**377**	**25.9**	378	25.9	**317**	**30.8**	317	30.8	317	30.9
401.bzip2	501	19.3	**501**	**19.3**	502	19.2	**485**	**19.9**	485	19.9	485	19.9
403.gcc	292	27.6	**292**	**27.6**	292	27.5	287	28.1	**287**	**28.0**	287	28.0
429.mcf	**160**	**57.0**	162	56.3	160	57.1	**160**	**57.0**	162	56.3	160	57.1
445.gobmk	504	20.8	505	20.8	**505**	**20.8**	472	22.2	**472**	**22.2**	472	22.2
456.hmmer	209	44.5	**209**	**44.5**	211	44.3	205	45.5	**205**	**45.5**	205	45.5
458.sjeng	502	24.1	**502**	**24.1**	502	24.1	**501**	**24.2**	502	24.1	501	24.2
462.libquantum	8.69	2390	7.89	2630	**8.09**	**2560**	8.69	2390	7.89	2630	**8.09**	**2560**
464.h264ref	592	37.4	599	36.9	**594**	**37.3**	480	46.1	**480**	**46.1**	482	45.9
471.omnetpp	**270**	**23.2**	270	23.1	267	23.4	**203**	**30.8**	202	30.9	203	30.8
473.astar	276	25.4	272	25.8	**273**	**25.7**	276	25.4	272	25.8	**273**	**25.7**
483.xalancbmk	**154**	**44.7**	154	44.7	154	44.7	**152**	**45.5**	151	45.6	152	45.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
Operating Mode set to Maximum Perfomance in BIOS
Sysinfo program /cpu2006.1.2/config/sysinfo.rev6800
$Rev: 6800 $ $Date:: 2011-10-11 #$ 6f2ebdff5032aaa42e583f96b07f99d3
running on Cara-speccpu1 Thu Jun 20 07:11:55 2013

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2450 0 @ 2.10GHz
      2 "physical id"s (chips)
      32 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 8
      siblings  : 16
      physical 0: cores 0 1 2 3 4 5 6 7
      physical 1: cores 0 1 2 3 4 5 6 7
   cache size : 20480 KB

From /proc/meminfo
```

Continued on next page

Platform Notes (Continued)

```
      MemTotal:       99036688 kB
      HugePages_Total:       0
      Hugepagesize:       2048 kB

   /usr/bin/lsb_release -d
      Red Hat Enterprise Linux Server release 6.2 (Santiago)

   From /etc/*release* /etc/*version*
      redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
      system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
      system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

   uname -a:
      Linux Cara-speccpu1 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
      x86_64 x86_64 x86_64 GNU/Linux

   run-level 3 Jun 18 10:25

   SPEC is set to: /cpu2006.1.2
      Filesystem     Type    Size  Used Avail Use% Mounted on
      /dev/mapper/vg_caraspeccpu1-lv_root
                     ext4     82G  7.9G   70G  11% /

   Additional information from dmidecode:
     Memory:
      12x Samsung M393B1K70DH0-CK0 8 GB 1600 MHz 2 rank

   (End of data from sysinfo program)
```

General Notes

```
 Environment variables set by runspec before the start of the run:
 KMP_AFFINITY = "granularity=fine,scatter"
 LD_LIBRARY_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64"
 OMP_NUM_THREADS = "16"

  Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
  memory using RHEL5.5
  Transparent Huge Pages enabled with:
  echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
  Filesystem page cache cleared with:
  echo 1>       /proc/sys/vm/drop_caches
```

Base Compiler Invocation

C benchmarks:

```
     icc  -m64
```

Continued on next page

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/smartheap -lsmartheap64

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64

400.perlbench: icc -m32

445.gobmk: icc -m32

Continued on next page

Peak Compiler Invocation (Continued)

464.h264ref: `icc -m32`

C++ benchmarks (except as noted below):
`icpc -m32`

473.astar: `icpc -m64`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
473.astar: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2)
`-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2)
`-opt-prefetch -ansi-alias`

401.bzip2: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2)
`-O3`(pass 2) `-no-prec-div -prof-use`(pass 2) `-auto-ilp32`
`-opt-prefetch -ansi-alias`

403.gcc: `-xSSE4.2 -ipo -O3 -no-prec-div -inline-calloc`
`-opt-malloc-options=3 -auto-ilp32`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-prof-use`(pass 2)
`-ansi-alias`

456.hmmer: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32`
`-ansi-alias`

458.sjeng: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2)
`-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2)
`-unroll4`

Continued on next page

Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-ra-region-strategy=block -ansi-alias -Wl,-z,muldefs -L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias -Wl,-z,muldefs -L/smartheap -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html
http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml
http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 17:13:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 9 October 2013.