# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B200 M3 (Intel Xeon E5-2650 v2 @ 2.60 GHz)

SPECint®2006 = 50.1

SPECint_base2006 = 47.1

**CPU2006 license:** 9019
**Test sponsor:** Cisco Systems
**Tested by:** Cisco Systems

**Test date:** Oct-2013
**Hardware Availability:** Sep-2013
**Software Availability:** Sep-2013

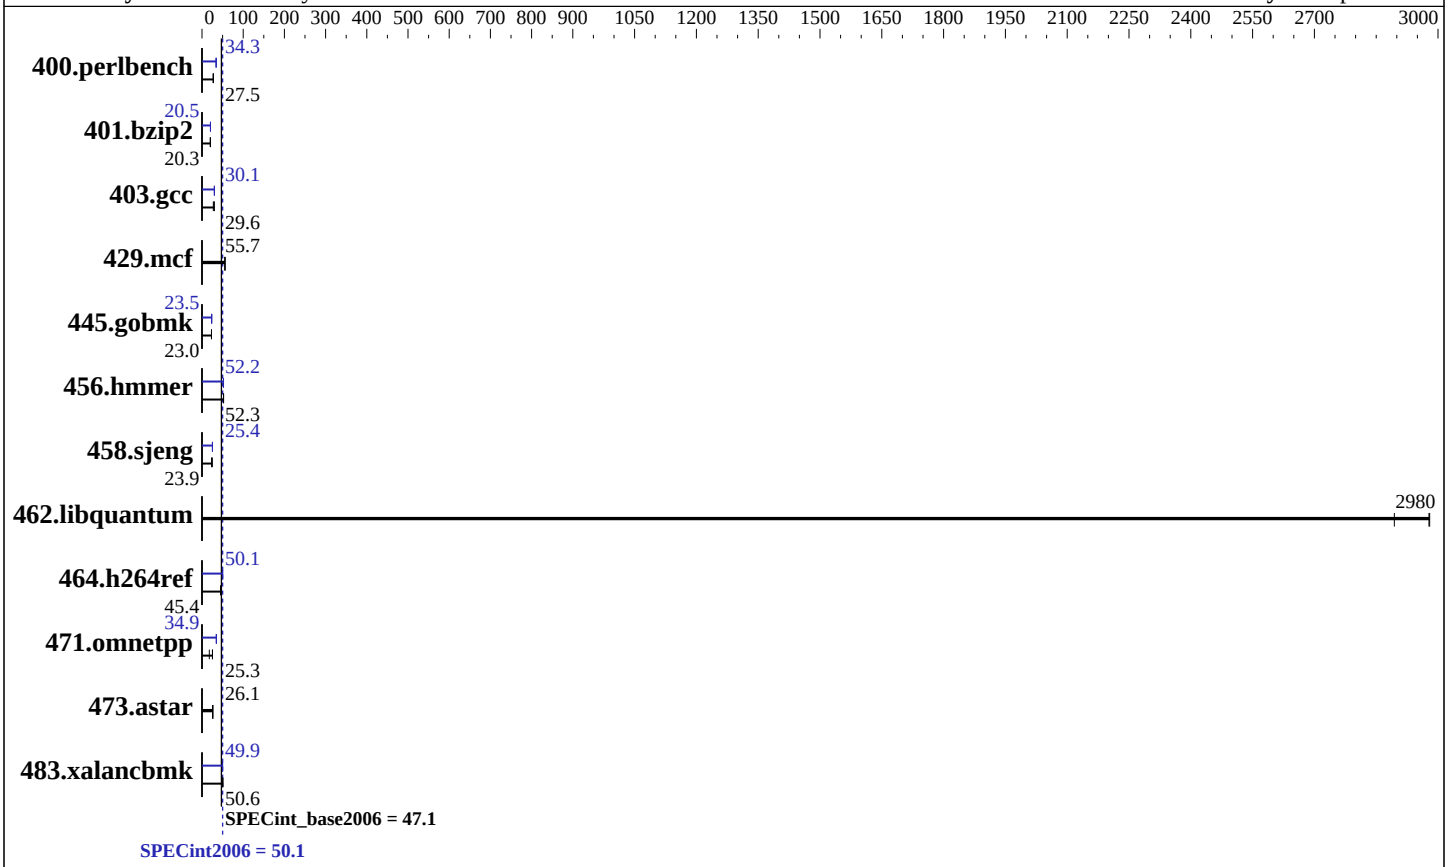


### Hardware

| | |
|---|---|
| CPU Name: | Intel Xeon E5-2650 v2 |
| CPU Characteristics: | Intel Turbo Boost Technology up to 3.40 GHz |
| CPU MHz: | 2600 |
| FPU: | Integrated |
| CPU(s) enabled: | 16 cores, 2 chips, 8 cores/chip |
| CPU(s) orderable: | 1,2 chips |
| Primary Cache: | 32 KB I + 32 KB D on chip per core |
| Secondary Cache: | 256 KB I+D on chip per core |
| L3 Cache: | 20 MB I+D on chip per chip |
| Other Cache: | None |
| Memory: | 128 GB (16 x 8 GB 2Rx4 PC3-14900R-11, ECC) |
| Disk Subsystem: | 1 X 600GB SAS, 15K RPM |
| Other Hardware: | None |

### Software

| | |
|---|---|
| Operating System: | Red Hat Enterprise Linux Server release 6.4 (Santiago)<br>2.6.32-358.el6.x86_64 |
| Compiler: | C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux |
| Auto Parallel: | Yes |
| File System: | ext4 |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 32/64-bit |
| Peak Pointers: | 32/64-bit |
| Other Software: | Microquill SmartHeap V10.0 |

# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B200 M3 (Intel Xeon E5-2650 v2 @ 2.60 GHz)

SPECint2006 = 50.1

SPECint_base2006 = 47.1

**CPU2006 license:** 9019
**Test sponsor:** Cisco Systems
**Tested by:** Cisco Systems

**Test date:** Oct-2013
**Hardware Availability:** Sep-2013
**Software Availability:** Sep-2013

## Results Table

| Benchmark | Base | | | | | | Peak | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 400.perlbench | 357 | 27.4 | **356** | **27.5** | 355 | 27.5 | 284 | 34.4 | 285 | 34.3 | **284** | **34.3** |
| 401.bzip2 | 475 | 20.3 | 475 | 20.3 | **475** | **20.3** | 470 | 20.5 | **470** | **20.5** | 470 | 20.6 |
| 403.gcc | 293 | 27.5 | 272 | 29.6 | **272** | **29.6** | **268** | **30.1** | 268 | 30.1 | 268 | 30.1 |
| 429.mcf | **164** | **55.7** | 164 | 55.7 | 164 | 55.7 | **164** | **55.7** | 164 | 55.7 | 164 | 55.7 |
| 445.gobmk | **456** | **23.0** | 456 | 23.0 | 455 | 23.1 | **447** | **23.5** | 447 | 23.5 | 447 | 23.5 |
| 456.hmmer | **178** | **52.3** | 179 | 52.2 | 178 | 52.4 | 179 | 52.3 | **179** | **52.2** | 179 | 52.1 |
| 458.sjeng | 521 | 23.2 | 485 | 24.9 | **506** | **23.9** | 477 | 25.4 | **477** | **25.4** | 477 | 25.4 |
| 462.libquantum | 7.16 | 2890 | **6.96** | **2980** | 6.95 | 2980 | 7.16 | 2890 | **6.96** | **2980** | 6.95 | 2980 |
| 464.h264ref | 487 | 45.5 | **487** | **45.4** | 487 | 45.4 | 442 | 50.1 | **442** | **50.1** | 443 | 50.0 |
| 471.omnetpp | 352 | 17.7 | 246 | 25.4 | **247** | **25.3** | 179 | 34.9 | **179** | **34.9** | 179 | 34.8 |
| 473.astar | 269 | 26.1 | 269 | 26.1 | **269** | **26.1** | 269 | 26.1 | 269 | 26.1 | **269** | **26.1** |
| 483.xalancbmk | 140 | 49.3 | **136** | **50.6** | 136 | 50.7 | 138 | 49.9 | 138 | 49.8 | **138** | **49.9** |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

## Platform Notes

```
BIOS Settings:
Intel HT Technology = Enabled
CPU performance set to HPC
Power Technology set to Custom
CPU Power State C6 set to Enabled
CPU Power State C1 Enhanced set to Disabled
Energy Performance policy set to Performance
Memory RAS configuration set to Maximum Performance
DRAM Clock Throttling Set to Performance
LV DDR Mode set to Performance-mode
DRAM Refresh Rate Set to 1x
Intel HT Technology = Disable
 Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6818
 $Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
 running on localhost.localdomain Mon Oct  7 23:44:09 2013

 This section contains SUT (System Under Test) info as seen by
 some common utilities.  To remove or add to this section, see:
   http://www.spec.org/cpu2006/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2650 v2 @ 2.60GHz
       2 "physical id"s (chips)
```

Continued on next page

## Platform Notes (Continued)

```
      16 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 8
      siblings  : 8
      physical 0: cores 0 1 2 3 4 5 6 7
      physical 1: cores 0 1 2 3 4 5 6 7
   cache size : 20480 KB

From /proc/meminfo
   MemTotal:       132089408 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   Red Hat Enterprise Linux Server release 6.4 (Santiago)

From /etc/*release* /etc/*version*
   redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
   system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
   Linux localhost.localdomain 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41
   EST 2013 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Oct 7 23:40

SPEC is set to: /opt/cpu2006-1.2
   Filesystem     Type    Size  Used Avail Use% Mounted on
   /dev/sda1      ext4    550G   26G  496G   5% /

Additional information from dmidecode:
  BIOS Cisco Systems, Inc. B200M3.2.1.3a.0.082320131800 08/23/2013
  Memory:
   16x 0xAD00 HMT31GR7EFR4C-RD 8 GB 1866 MHz 2 rank
   8x NO DIMM NO DIMM

(End of data from sysinfo program)
```

## General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64:/opt/cpu2006-1.2/sh"
OMP_NUM_THREADS = "16"

 Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
 memory using RedHat EL 6.4
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Continued on next page

## General Notes (Continued)

```
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:
```
icc  -m64
```

C++ benchmarks:
```
icpc -m64
```

## Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

## Base Optimization Flags

C benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32
```

C++ benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh -lsmartheap64
```

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64

400.perlbench: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

C++ benchmarks (except as noted below):
icpc -m32

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32 -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -inline-calloc -opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias

Continued on next page

# Peak Optimization Flags (Continued)

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32 -ansi-alias

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-ra-region-strategy=block -ansi-alias -Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias -Wl,-z,muldefs -L/sh -lsmartheap

# Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html
http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130717.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml
http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130717.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 19:17:47 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 5 November 2013.