SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL460c Gen8
(1.80 GHz, Intel Xeon E5-2603 v2)

SPECint®2006 = 29.5

SPECint_base2006 = 28.2

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Oct-2013
Hardware Availability: Sep-2013
Software Availability: Sep-2013

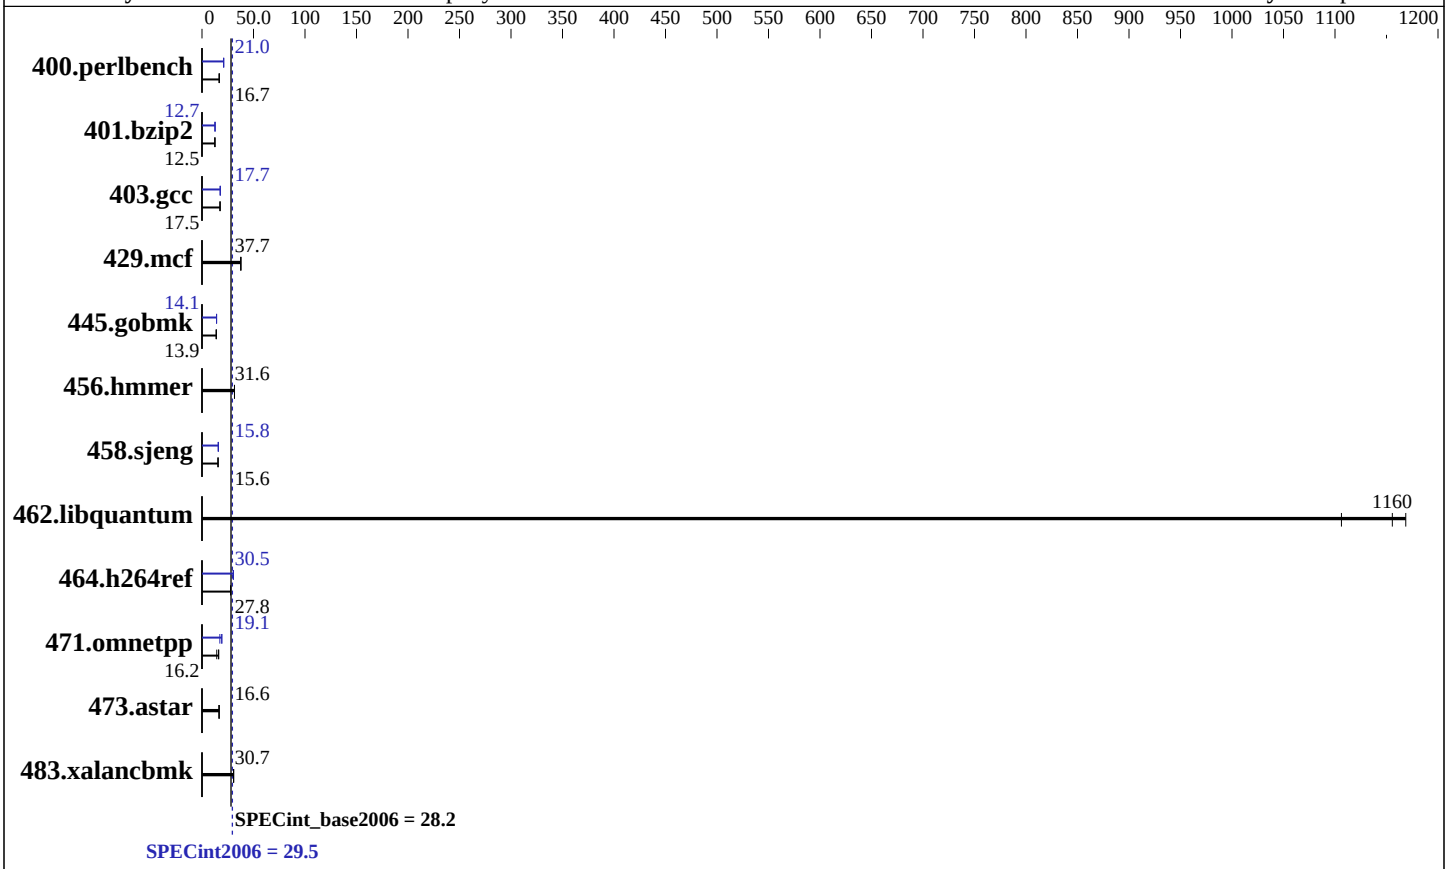

Hardware

CPU Name:	Intel Xeon E5-2603 v2
CPU Characteristics:	
CPU MHz:	1800
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	10 MB I+D on chip per chip
Other Cache:	None
Memory:	128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz and CL9)
Disk Subsystem:	1 x 146 GB 15 K SAS, RAID 1
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 11 (x86_64) SP3 Kernel 3.0.76-0.11-default
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
Auto Parallel:	Yes
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL460c Gen8
(1.80 GHz, Intel Xeon E5-2603 v2)

SPECint2006 = 29.5

SPECint_base2006 = 28.2

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Oct-2013
Hardware Availability: Sep-2013
Software Availability: Sep-2013

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	584	16.7	583	16.8	**584**	**16.7**	465	21.0	**465**	**21.0**	464	21.1
401.bzip2	**771**	**12.5**	771	12.5	771	12.5	**762**	**12.7**	762	12.7	763	12.7
403.gcc	**460**	**17.5**	458	17.6	460	17.5	454	17.7	454	17.7	**454**	**17.7**
429.mcf	242	37.7	242	37.7	**242**	**37.7**	242	37.7	242	37.7	**242**	**37.7**
445.gobmk	757	13.9	756	13.9	**757**	**13.9**	742	14.1	**742**	**14.1**	742	14.1
456.hmmer	296	31.6	**296**	**31.6**	296	31.5	296	31.6	**296**	**31.6**	296	31.5
458.sjeng	**776**	**15.6**	777	15.6	776	15.6	763	15.9	**764**	**15.8**	764	15.8
462.libquantum	18.7	1110	**17.9**	**1160**	17.7	1170	18.7	1110	**17.9**	**1160**	17.7	1170
464.h264ref	**796**	**27.8**	798	27.7	794	27.9	728	30.4	**726**	**30.5**	726	30.5
471.omnetpp	436	14.3	**387**	**16.2**	387	16.2	361	17.3	**327**	**19.1**	324	19.3
473.astar	**423**	**16.6**	423	16.6	423	16.6	**423**	**16.6**	423	16.6	423	16.6
483.xalancbmk	225	30.7	**225**	**30.7**	224	30.7	225	30.7	**225**	**30.7**	224	30.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
 echo 1 > /proc/sys/vm/drop_caches
Disabled unused Linux services through "stop_services.sh" before running.
```

Platform Notes

```
BIOS Configuration:
 HP Power Profile set to Maximum Performance
 Minimum Processor Idle Power Core State set to C1E
 Minimum Processor Idle Power Package State set to C6 (non-retention)
 Energy/Performance Bias is set to Maximum Performance
 Memory Power Savings Mode set to Maximum Performance
 Thermal Configuration set to Maximum Cooling
 Collaborative Power Control set to Disabled
 Dynamic Power Capping Functionality set to Disabled
 Processor Power and Utilization Monitoring set to Disabled
 Memory Refresh Rate set to 1x

Sysinfo program /cpu2006/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on bl460c-gen8-bay8 Fri Oct 18 17:58:35 2013

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
```

Continued on next page

Platform Notes (Continued)

```
      http://www.spec.org/cpu2006/Docs/config.html#sysinfo

    From /proc/cpuinfo
       model name : Intel(R) Xeon(R) CPU E5-2603 v2 @ 1.80GHz
          2 "physical id"s (chips)
          8 "processors"
       cores, siblings (Caution: counting these is hw and system dependent.  The
       following excerpts from /proc/cpuinfo might not be reliable.  Use with
       caution.)
          cpu cores : 4
          siblings  : 4
          physical 0: cores 0 1 2 3
          physical 1: cores 0 1 2 3
       cache size : 10240 KB

    From /proc/meminfo
       MemTotal:       132130196 kB
       HugePages_Total:       0
       Hugepagesize:       2048 kB

    /usr/bin/lsb_release -d
       SUSE Linux Enterprise Server 11 (x86_64)

    From /etc/*release* /etc/*version*
       SuSE-release:
          SUSE Linux Enterprise Server 11 (x86_64)
          VERSION = 11
          PATCHLEVEL = 3

    uname -a:
       Linux bl460c-gen8-bay8 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC
       2013 (ccab990) x86_64 x86_64 x86_64 GNU/Linux

    run-level 3 Oct 18 17:54 last=S

    SPEC is set to: /cpu2006
       Filesystem     Type  Size  Used Avail Use% Mounted on
       /dev/sda2      ext3  133G   12G  121G   9% /

    Additional information from dmidecode:
      BIOS HP I31 09/08/2013
      Memory:
       16x HP 689911-071 8 GB 1333 MHz

    (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh"
OMP_NUM_THREADS = "8"
```

Continued on next page

General Notes (Continued)

```
Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4
```

Base Compiler Invocation

C benchmarks:
```
icc  -m64
```

C++ benchmarks:
```
icpc -m64
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
445.gobmk: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
471.omnetpp: `-DSPEC_CPU_LP64`
473.astar: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32
```

C++ benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh -lsmartheap64
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m64`

400.perlbench: `icc -m32`

445.gobmk: `icc -m32`

464.h264ref: `icc -m32`

C++ benchmarks (except as noted below):
`icpc -m64`

471.omnetpp: `icpc -m32`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
473.astar: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-opt-prefetch -ansi-alias`

401.bzip2: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div -prof-use`(pass 2) `-auto-ilp32 -opt-prefetch -ansi-alias`

403.gcc: `-xSSE4.2 -ipo -O3 -no-prec-div -inline-calloc -opt-malloc-options=3 -auto-ilp32`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-prof-use`(pass 2) `-ansi-alias`

Continued on next page

Peak Optimization Flags (Continued)

456.hmmer: basepeak = yes

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-ra-region-strategy=block -ansi-alias -Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revB.html
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revB.xml
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 19:23:35 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 5 November 2013.