SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro SuperServer 7047R-72RFT
(X9DRH-7TF , Intel Xeon E5-2697 v2)

SPECfp®2006 = 104

SPECfp_base2006 = 98.8

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Oct-2013
Hardware Availability: Oct-2013
Software Availability: Sep-2013

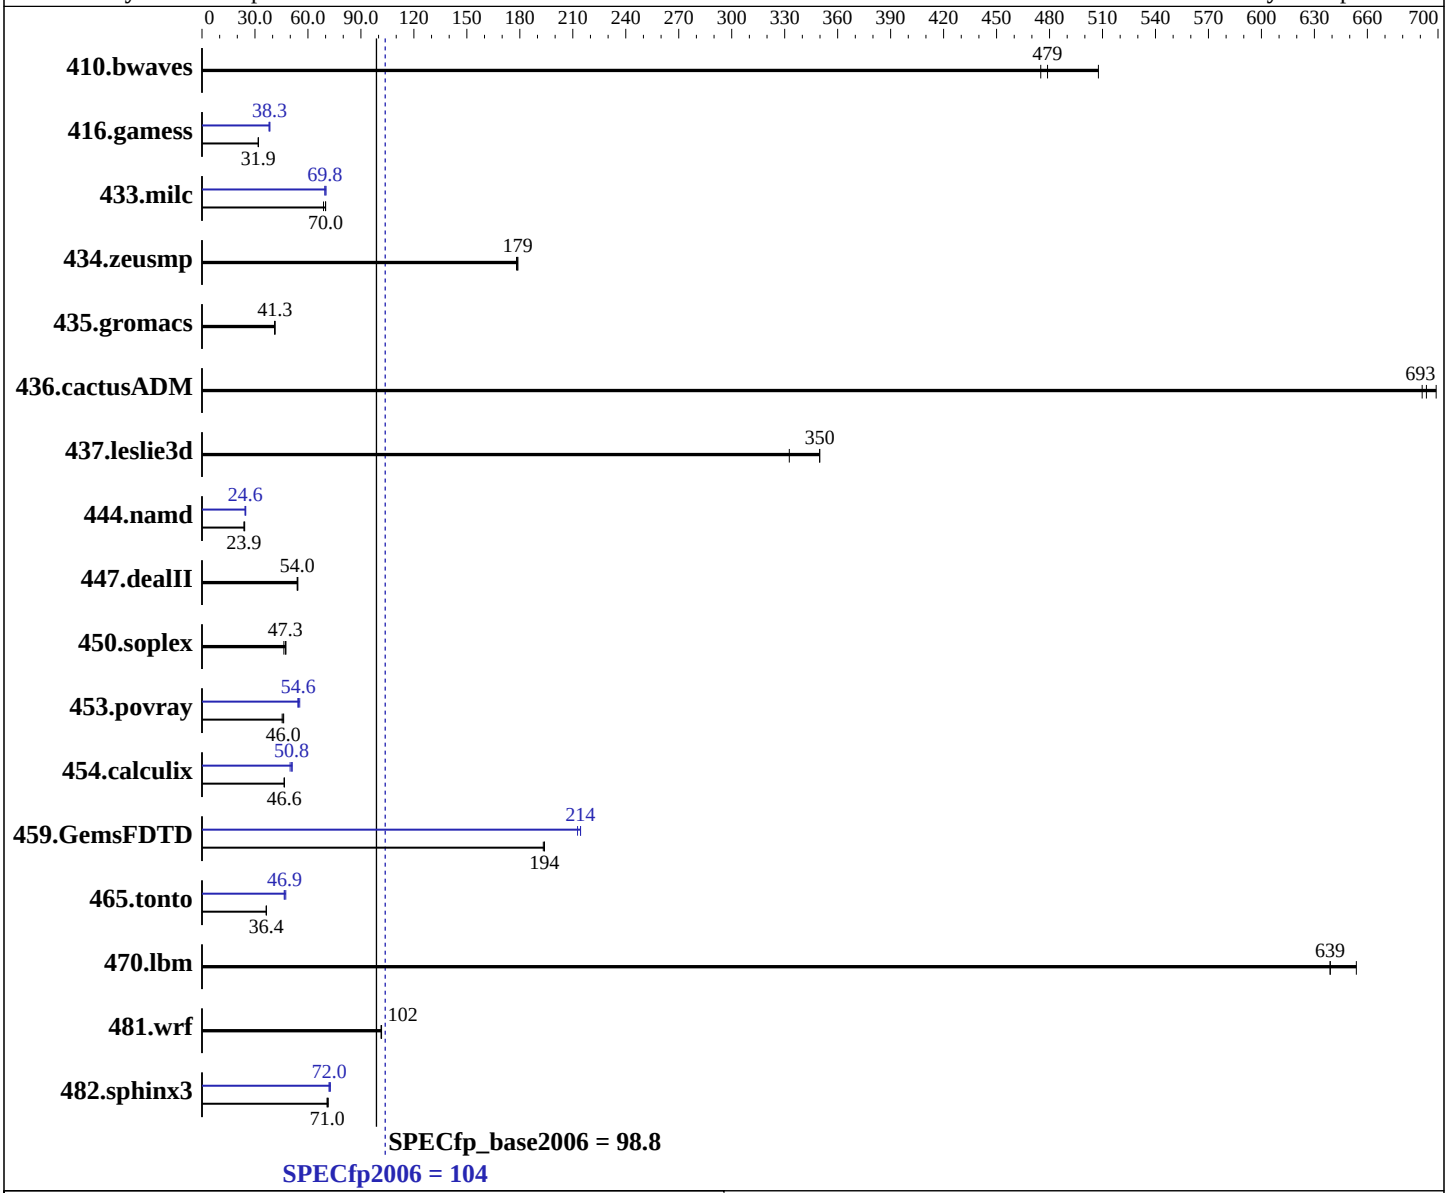

Hardware

CPU Name:	Intel Xeon E5-2697 v2
CPU Characteristics:	Intel Turbo Boost Technology up to 3.50 GHz
CPU MHz:	2700
FPU:	Integrated
CPU(s) enabled:	24 cores, 2 chips, 12 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.4, Kernel 2.6.32-358.18.1.el6.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux; Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
Auto Parallel:	Yes
File System:	ext4
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro SuperServer 7047R-72RFT
(X9DRH-7TF , Intel Xeon E5-2697 v2)

SPECfp2006 = 104

SPECfp_base2006 = 98.8

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Oct-2013
Hardware Availability: Oct-2013
Software Availability: Sep-2013

L3 Cache: 30 MB I+D on chip per chip
Other Cache: None
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-14900R-13, ECC)
Disk Subsystem: 1 x 1000 GB SATA III, 7200 RPM
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	**28.4**	**479**	28.6	475	26.8	508	**28.4**	**479**	28.6	475	26.8	508
416.gamess	613	31.9	614	31.9	**614**	**31.9**	**511**	**38.3**	510	38.4	516	37.9
433.milc	133	68.8	131	70.0	**131**	**70.0**	132	69.6	131	70.3	**132**	**69.8**
434.zeusmp	51.1	178	50.9	179	**50.9**	**179**	51.1	178	50.9	179	**50.9**	**179**
435.gromacs	174	41.1	173	41.3	**173**	**41.3**	174	41.1	173	41.3	**173**	**41.3**
436.cactusADM	17.1	699	17.3	691	**17.2**	**693**	17.1	699	17.3	691	**17.2**	**693**
437.leslie3d	28.3	333	26.9	350	**26.9**	**350**	28.3	333	26.9	350	**26.9**	**350**
444.namd	332	24.2	**336**	**23.9**	336	23.8	329	24.4	324	24.8	**326**	**24.6**
447.dealII	**212**	**54.0**	211	54.3	212	53.9	**212**	**54.0**	211	54.3	212	53.9
450.soplex	180	46.4	**176**	**47.3**	175	47.5	180	46.4	**176**	**47.3**	175	47.5
453.povray	117	45.4	**116**	**46.0**	115	46.3	**97.4**	**54.6**	98.0	54.3	96.1	55.3
454.calculix	177	46.6	**177**	**46.6**	177	46.7	165	49.9	161	51.1	**162**	**50.8**
459.GemsFDTD	54.9	193	54.7	194	**54.7**	**194**	49.9	213	**49.5**	**214**	49.5	214
465.tonto	270	36.5	270	36.4	**270**	**36.4**	**210**	**46.9**	211	46.6	207	47.5
470.lbm	21.0	654	**21.5**	**639**	21.5	639	21.0	654	**21.5**	**639**	21.5	639
481.wrf	**110**	**102**	110	102	110	102	**110**	**102**	110	102	110	102
482.sphinx3	275	70.8	273	71.5	**274**	**71.0**	268	72.7	**271**	**72.0**	271	72.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
Sysinfo program /root/cpu2006/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on 185-211.jnet Sat Oct 26 05:58:43 2013

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2697 v2 @ 2.70GHz
```

Continued on next page

Platform Notes (Continued)

```
        2 "physical id"s (chips)
        24 "processors"
     cores, siblings (Caution: counting these is hw and system dependent.  The
     following excerpts from /proc/cpuinfo might not be reliable.  Use with
     caution.)
        cpu cores : 12
        siblings  : 12
        physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
        physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
     cache size : 30720 KB

  From /proc/meminfo
     MemTotal:       132121952 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /usr/bin/lsb_release -d
     Red Hat Enterprise Linux Server release 6.4 (Santiago)

  From /etc/*release* /etc/*version*
     redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
     system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
     system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

  uname -a:
     Linux 185-211.jnet 2.6.32-358.18.1.el6.x86_64 #1 SMP Fri Aug 2 17:04:38 EDT
     2013 x86_64 x86_64 x86_64 GNU/Linux

  run-level 3 Oct 24 18:07

  SPEC is set to: /root/cpu2006
     Filesystem     Type    Size  Used Avail Use% Mounted on
     /dev/sda3      ext4    385G  288G   78G  79% /

  Additional information from dmidecode:
    BIOS American Megatrends Inc. 3.0a 09/26/2013
    Memory:
     16x   8 GB
     14x Hynix Semiconducto HMT41GR7AFR8C 8 GB 1866 MHz 2 rank
     2x Hynix Semiconductor HMT41GR7AFR8C- 8 GB 1866 MHz 2 rank

  (End of data from sysinfo program)
```

General Notes

```
 Environment variables set by runspec before the start of the run:
 KMP_AFFINITY = "granularity=fine,compact,0,1"
 LD_LIBRARY_PATH = "/root/cpu2006/libs/32:/root/cpu2006/libs/64:/root/cpu2006/sh"
 OMP_NUM_THREADS = "24"

  Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
```

Continued on next page

General Notes (Continued)

```
memory using RedHat EL 6.4
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
disabled hyper-threading in OS using CPU hotplugging
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
```
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias
```

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32 -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias -parallel

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

Continued on next page

Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revB.20130719.html
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revB.20130719.xml
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 17:20:43 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 5 December 2013.