SPEC® CINT2006 Result

Sugon

I620-G15 (Intel Xeon E5-2697 v2, 2.70 GHz)

SPECint®_rate2006 = 965

SPECint_rate_base2006 = 933

CPU2006 license:	9046	**Test date:**	Nov-2013
Test sponsor:	Sugon	**Hardware Availability:**	Nov-2013
Tested by:	Sugon	**Software Availability:**	Nov-2013

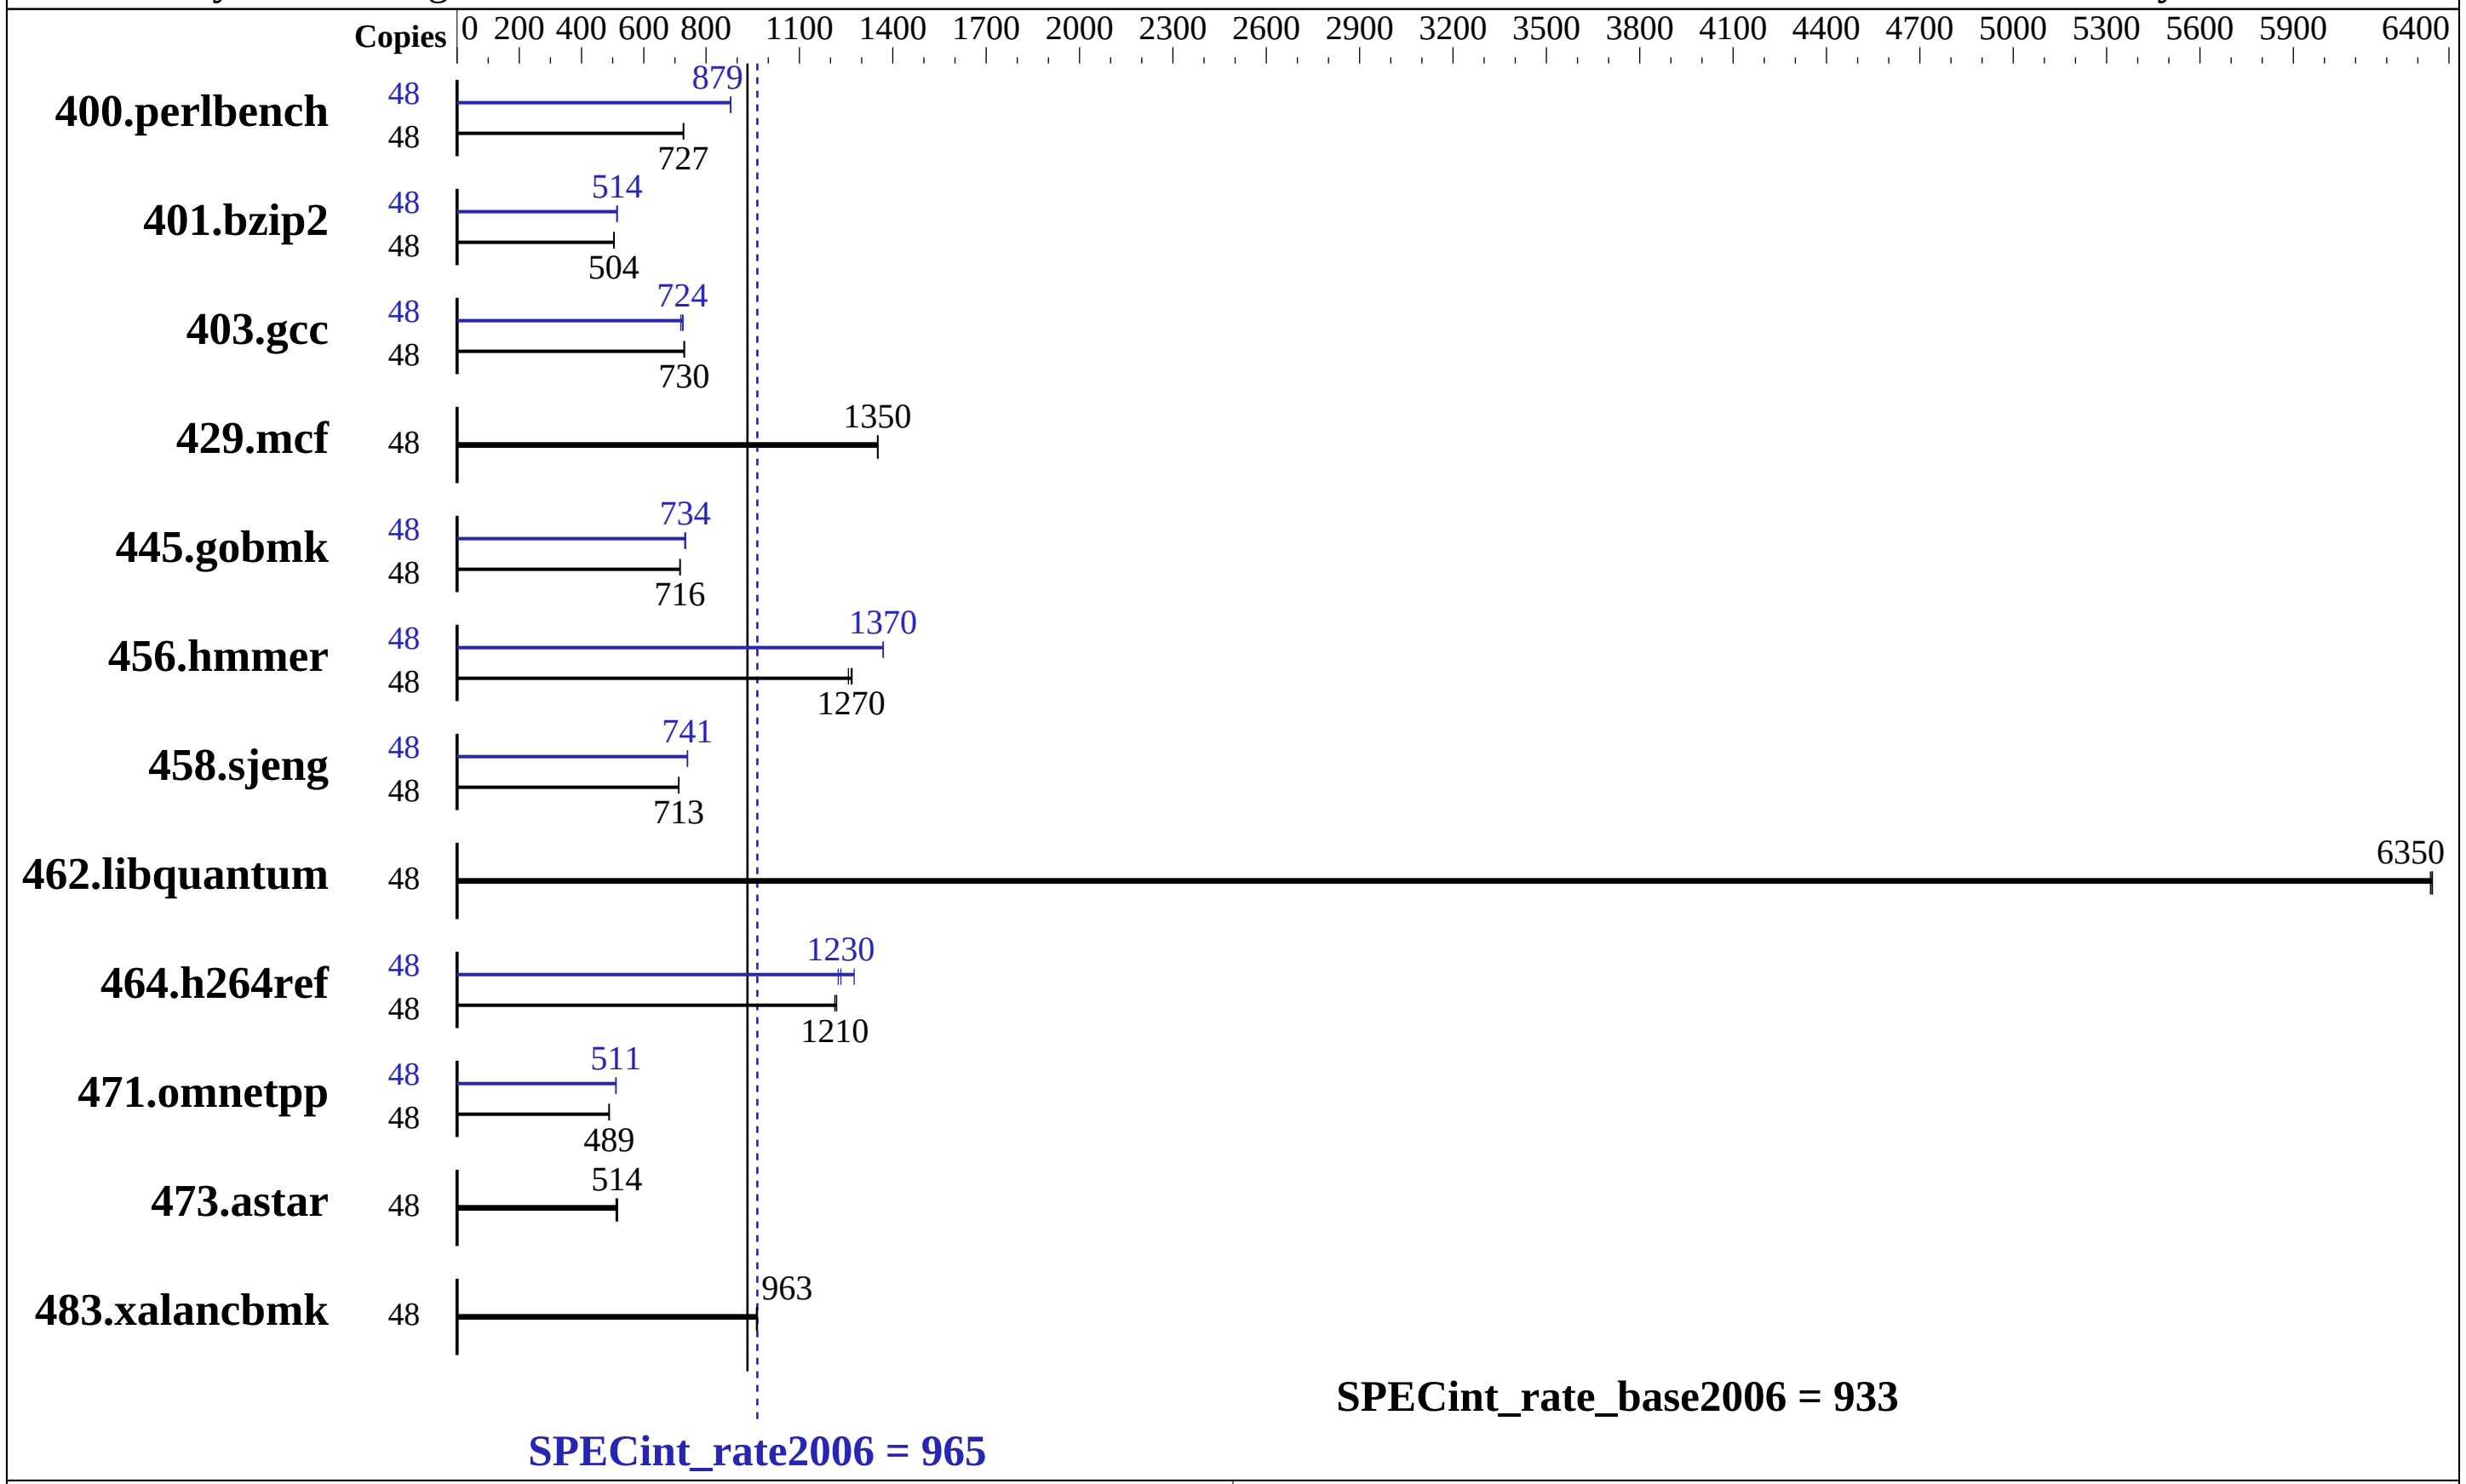

Hardware

CPU Name:	Intel Xeon E5-2697 v2
CPU Characteristics:	Intel Turbo Boost Technology up to 3.50 GHz
CPU MHz:	2700
FPU:	Integrated
CPU(s) enabled:	24 cores, 2 chips, 12 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	30 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC)
Disk Subsystem:	1 x 3 TB SATA, 7200RPM
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 11 (x86_64) 3.0.76-0.11-default
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (Full multiuser with network)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	48	644	728	645	727	**645**	**727**	48	534	879	**534**	**879**	533	879
401.bzip2	48	917	505	920	504	**919**	**504**	48	**901**	**514**	900	515	903	513
403.gcc	48	529	731	**529**	**730**	530	729	48	532	726	538	719	**534**	**724**
429.mcf	48	**324**	**1350**	324	1350	324	1350	48	**324**	**1350**	324	1350	324	1350
445.gobmk	48	702	717	703	716	**703**	**716**	48	**686**	**734**	686	734	688	732
456.hmmer	48	356	1260	353	1270	**354**	**1270**	48	**327**	**1370**	327	1370	327	1370
458.sjeng	48	815	713	815	712	**815**	**713**	48	**784**	**741**	785	740	784	741
462.libquantum	48	157	6350	**157**	**6350**	157	6340	48	157	6350	**157**	**6350**	157	6340
464.h264ref	48	871	1220	875	1210	**875**	**1210**	48	832	1280	867	1220	**861**	**1230**
471.omnetpp	48	613	489	615	488	**614**	**489**	48	588	510	**587**	**511**	587	511
473.astar	48	654	516	**656**	**514**	659	511	48	654	516	**656**	**514**	659	511
483.xalancbmk	48	344	962	343	965	**344**	**963**	48	344	962	343	965	**344**	**963**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS Configuration:
Intel Virtualization technology set to disabled
Power Technology set to performance
Turbo boost set to enabled
DDR Speed set to force 1866
Sysinfo program /root/cpu2006/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on linux-e494 Tue Nov 12 01:39:52 2013

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2697 v2 @ 2.70GHz
      2 "physical id"s (chips)
      48 "processors"
```

Continued on next page

Platform Notes (Continued)

```
      cores, siblings (Caution: counting these is hw and system dependent.  The
      following excerpts from /proc/cpuinfo might not be reliable.  Use with
      caution.)
         cpu cores : 12
         siblings  : 24
         physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
         physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
      cache size : 30720 KB

   From /proc/meminfo
      MemTotal:       264519660 kB
      HugePages_Total:       0
      Hugepagesize:       2048 kB

   From /etc/*release* /etc/*version*
      SuSE-release:
         SUSE Linux Enterprise Server 11 (x86_64)
         VERSION = 11
         PATCHLEVEL = 3

   uname -a:
      Linux linux-e494 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013
      (ccab990) x86_64 x86_64 x86_64 GNU/Linux

   run-level 3 Nov 12 01:31 last=S

   SPEC is set to: /root/cpu2006
      Filesystem     Type  Size  Used Avail Use% Mounted on
      /dev/sda3      ext3  2.7T  338G  2.4T  13% /

   Additional information from dmidecode:
     BIOS American Megatrends Inc. V8.100A 10/31/2013
     Memory:
      16x   16 GB
      16x Samsung M393B2G70QH0-CMA 16 GB 1866 MHz

   (End of data from sysinfo program)
  There is a error in sysinfo output. There are only 16 DIMMs in this
  system. The cause of this error is the sysinfo itself. The sysinfo
  of revsion 6818 can't identify the correct memory information.
  The memory information should be:
      Memory:
       16x Samsung M393B2G70QH0-CMA 16 GB 1866 MHz
```

General Notes

```
  Environment variables set by runspec before the start of the run:
  LD_LIBRARY_PATH = "/root/cpu2006/libs/32:/root/cpu2006/libs/64:/root/cpu2006/sh"

   Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
   memory using RedHat EL 6.4
```

Continued on next page

General Notes (Continued)

```
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1>       /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
`icc   -m32`

C++ benchmarks:
`icpc -m32`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`

C++ benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`
`-Wl,-z,muldefs -L/sh -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc   -m32`

Continued on next page

Peak Compiler Invocation (Continued)

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:
`icpc -m32`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-auto-ilp32`

401.bzip2: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `-xSSE4.2 -ipo -O3 -no-prec-div`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-prof-use`(pass 2) `-ansi-alias -opt-mem-layout-trans=3`

456.hmmer: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32`

458.sjeng: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-unroll4 -auto-ilp32`

Continued on next page

Peak Optimization Flags (Continued)

462.libquantum: `basepeak = yes`

464.h264ref: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-unroll2` `-ansi-alias`

C++ benchmarks:

471.omnetpp: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-ansi-alias` `-opt-ra-region-strategy=block` `-Wl,-z,muldefs` `-L/sh -lsmartheap`

473.astar: `basepeak = yes`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-IVB.html
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-IVB.xml
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 18:13:54 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 December 2013.