



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

**SPECfp®2006 = 91.9**

PRIMERGY CX250 S2, Intel Xeon E5-2660 v2, 2.20 GHz

**SPECfp\_base2006 = 87.7**

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Nov-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

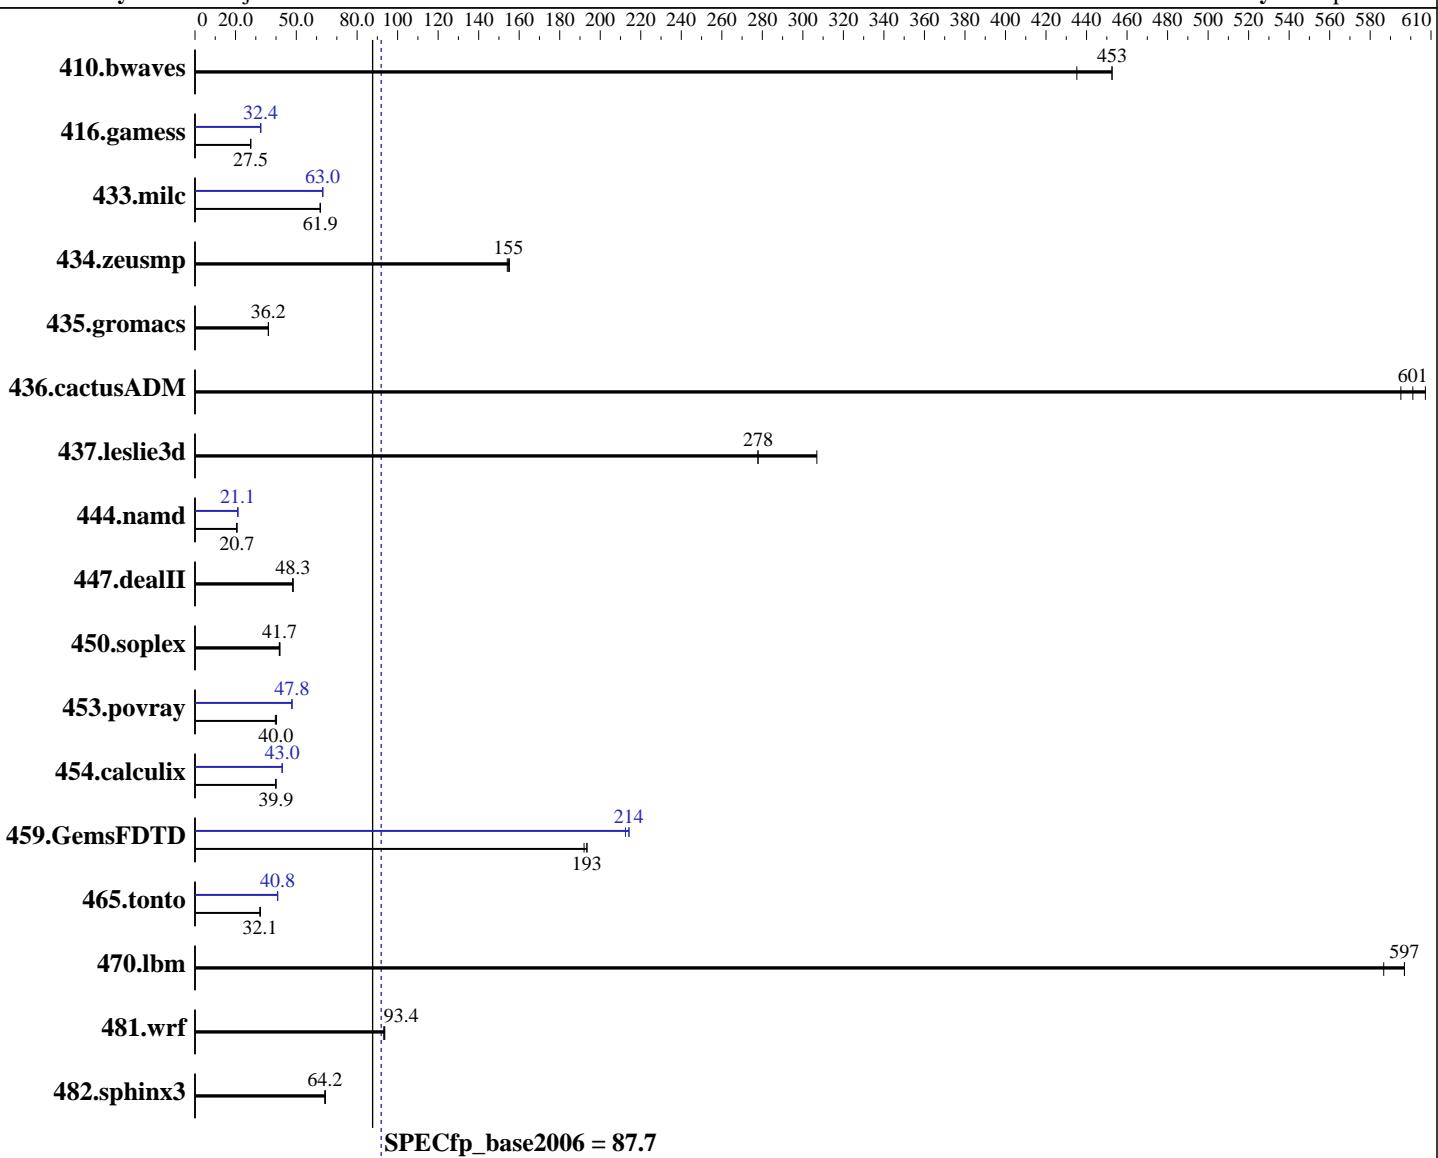

## Hardware

CPU Name: Intel Xeon E5-2660 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz  
 CPU MHz: 2200  
 FPU: Integrated  
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

## Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
 Compiler: 2.6.32-358.11.1.el6.x86\_64  
 C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY CX250 S2, Intel Xeon E5-2660 v2, 2.20 GHz

**SPECfp2006 = 91.9**

**SPECfp\_base2006 = 87.7**

**CPU2006 license:** 19

**Test date:** Nov-2013

**Test sponsor:** Fujitsu

**Hardware Availability:** Sep-2013

**Tested by:** Fujitsu

**Software Availability:** Sep-2013

L3 Cache: 25 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC)  
 Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM  
 Other Hardware: None

System State: Run level 5 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	30.0	453	<b>30.0</b>	<b>453</b>	31.2	435	30.0	453	<b>30.0</b>	<b>453</b>	31.2	435
416.gamess	713	27.5	712	27.5	<b>712</b>	<b>27.5</b>	603	32.5	<b>604</b>	<b>32.4</b>	605	32.4
433.milc	149	61.7	148	61.9	<b>148</b>	<b>61.9</b>	146	63.0	146	63.1	<b>146</b>	<b>63.0</b>
434.zeusmp	59.0	154	58.6	155	<b>58.8</b>	<b>155</b>	59.0	154	58.6	155	<b>58.8</b>	<b>155</b>
435.gromacs	197	36.3	<b>197</b>	<b>36.2</b>	197	36.2	197	36.3	<b>197</b>	<b>36.2</b>	197	36.2
436.cactusADM	20.1	595	19.7	607	<b>19.9</b>	<b>601</b>	20.1	595	19.7	607	<b>19.9</b>	<b>601</b>
437.leslie3d	30.6	307	33.8	278	<b>33.8</b>	<b>278</b>	30.6	307	33.8	278	<b>33.8</b>	<b>278</b>
444.namd	388	20.7	<b>388</b>	<b>20.7</b>	388	20.7	<b>380</b>	<b>21.1</b>	380	21.1	380	21.1
447.dealII	237	48.3	237	48.3	<b>237</b>	<b>48.3</b>	237	48.3	237	48.3	<b>237</b>	<b>48.3</b>
450.soplex	199	42.0	201	41.6	<b>200</b>	<b>41.7</b>	199	42.0	201	41.6	<b>200</b>	<b>41.7</b>
453.povray	<b>133</b>	<b>40.0</b>	134	39.7	132	40.2	111	47.8	111	47.8	<b>111</b>	<b>47.8</b>
454.calculix	206	40.0	207	39.8	<b>207</b>	<b>39.9</b>	192	43.1	192	43.0	<b>192</b>	<b>43.0</b>
459.GemsFDTD	<b>54.9</b>	<b>193</b>	54.9	193	55.3	192	<b>49.5</b>	<b>214</b>	49.9	212	49.5	214
465.tonto	<b>307</b>	<b>32.1</b>	305	32.3	307	32.1	<b>242</b>	40.7	241	40.8	<b>241</b>	<b>40.8</b>
470.lbm	23.4	587	<b>23.0</b>	<b>597</b>	23.0	597	23.4	587	<b>23.0</b>	<b>597</b>	23.0	597
481.wrf	<b>120</b>	<b>93.4</b>	119	93.7	120	93.2	<b>120</b>	<b>93.4</b>	119	93.7	120	93.2
482.sphinx3	303	64.3	<b>304</b>	<b>64.2</b>	304	64.1	<b>303</b>	<b>64.3</b>	<b>304</b>	<b>64.2</b>	304	64.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:

Energy Performance = Performance  
 Utilization Profile = Unbalanced

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/SPECcpu2006/lib32:/SPECcpu2006/lib64:/SPECcpu2006/sh"

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX250 S2, Intel Xeon E5-2660 v2, 2.20 GHz

**SPECfp2006 = 91.9**

**SPECfp\_base2006 = 87.7**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Nov-2013

**Hardware Availability:** Sep-2013

**Software Availability:** Sep-2013

## General Notes (Continued)

OMP\_NUM\_THREADS = "20"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

For information about Fujitsu please visit: <http://www.fujitsu.com>

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX250 S2, Intel Xeon E5-2660 v2, 2.20 GHz

**SPECfp2006 = 91.9**

CPU2006 license: 19

Test date: Nov-2013

Test sponsor: Fujitsu

Hardware Availability: Sep-2013

Tested by: Fujitsu

Software Availability: Sep-2013

## Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32  
-ansi-alias
```

```
470.lbm: basepeak = yes
```

```
482.sphinx3: basepeak = yes
```

C++ benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX250 S2, Intel Xeon E5-2660 v2, 2.20 GHz

**SPECfp2006 = 91.9**

**CPU2006 license:** 19

**Test date:** Nov-2013

**Test sponsor:** Fujitsu

**Hardware Availability:** Sep-2013

**Tested by:** Fujitsu

**Software Availability:** Sep-2013

## Peak Optimization Flags (Continued)

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll12  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll12  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll14

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20131009.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20131009.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX250 S2, Intel Xeon E5-2660 v2, 2.20 GHz

**SPECfp2006 = 91.9**

**SPECfp\_base2006 = 87.7**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Nov-2013

**Hardware Availability:** Sep-2013

**Software Availability:** Sep-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 18:15:00 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 3 December 2013.