SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M3 (Intel Xeon E5-2660 v2, 2.20 GHz)

SPECfp®2006 = 83.1

SPECfp_base2006 = 79.5

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: Nov-2013
Hardware Availability: Sep-2013
Software Availability: Sep-2013

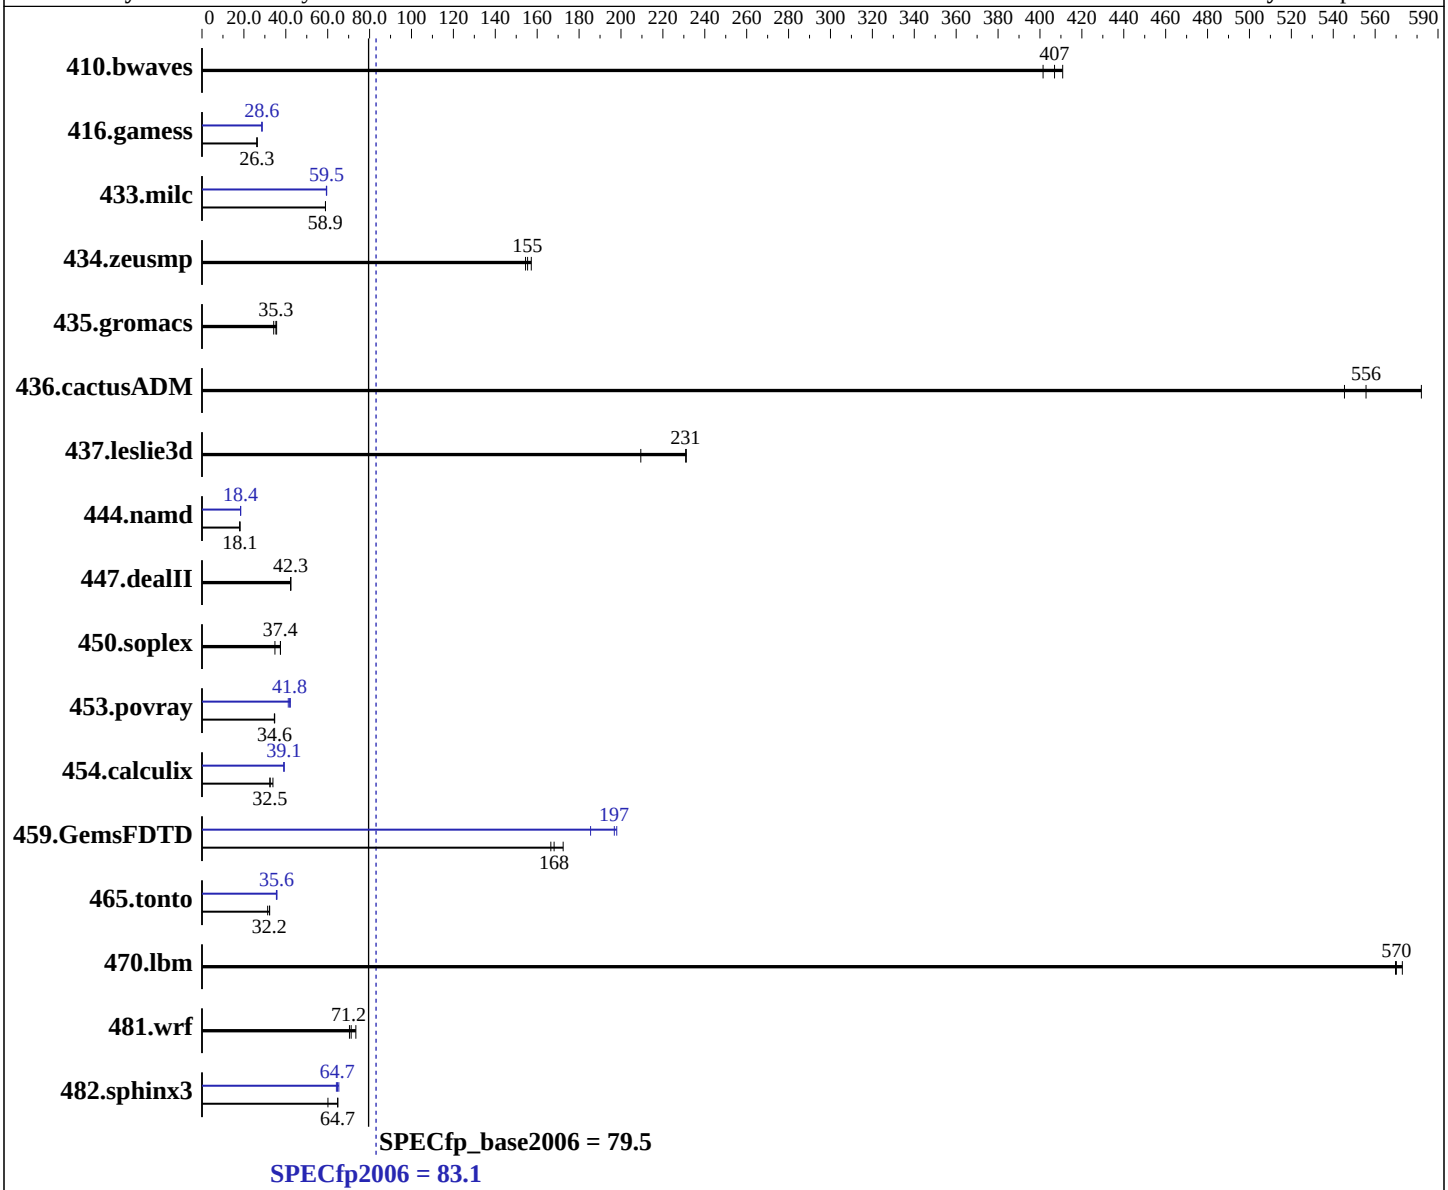

Hardware

CPU Name:	Intel Xeon E5-2660 v2
CPU Characteristics:	Intel Turbo Boost Technology up to 3.00 GHz
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	20 cores, 2 chips, 10 cores/chip
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.4 (Santiago) 2.6.32-358.el6.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux; Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
Auto Parallel:	Yes
File System:	ext4

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M3 (Intel Xeon E5-2660 v2, 2.20 GHz)

SPECfp2006 = 83.1

SPECfp_base2006 = 79.5

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: Nov-2013
Hardware Availability: Sep-2013
Software Availability: Sep-2013

L3 Cache: 25 MB I+D on chip per chip
Other Cache: None
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-14900R-13, ECC)
Disk Subsystem: 1 X 600 GB 10000 RPM SAS
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	**33.4**	**407**	33.8	401	33.1	411	**33.4**	**407**	33.8	401	33.1	411
416.gamess	747	26.2	744	26.3	**745**	**26.3**	684	28.6	684	28.6	**684**	**28.6**
433.milc	156	58.9	156	59.0	**156**	**58.9**	155	59.4	154	59.5	**154**	**59.5**
434.zeusmp	58.9	154	57.9	157	**58.5**	**155**	58.9	154	57.9	157	**58.5**	**155**
435.gromacs	200	35.6	**202**	**35.3**	209	34.2	200	35.6	**202**	**35.3**	209	34.2
436.cactusADM	20.5	582	**21.5**	**556**	21.9	545	20.5	582	**21.5**	**556**	21.9	545
437.leslie3d	44.9	209	40.7	231	**40.7**	**231**	44.9	209	40.7	231	**40.7**	**231**
444.namd	444	18.1	444	18.1	**444**	**18.1**	435	18.4	**435**	**18.4**	435	18.4
447.dealII	270	42.4	**270**	**42.3**	270	42.3	270	42.4	**270**	**42.3**	270	42.3
450.soplex	**223**	**37.4**	223	37.5	240	34.8	**223**	**37.4**	223	37.5	240	34.8
453.povray	153	34.7	154	34.5	**154**	**34.6**	129	41.2	126	42.2	**127**	**41.8**
454.calculix	**254**	**32.5**	244	33.9	255	32.4	**211**	**39.1**	211	39.1	211	39.1
459.GemsFDTD	63.7	167	**63.1**	**168**	61.5	172	**53.9**	**197**	57.2	185	53.6	198
465.tonto	305	32.3	314	31.3	**306**	**32.2**	277	35.5	275	35.8	**276**	**35.6**
470.lbm	**24.1**	**570**	24.1	570	24.0	573	**24.1**	**570**	24.1	570	24.0	573
481.wrf	159	70.4	152	73.4	**157**	**71.2**	159	70.4	152	73.4	**157**	**71.2**
482.sphinx3	**301**	**64.7**	324	60.1	300	64.9	298	65.3	**301**	**64.7**	304	64.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS Settings:
Intel HT Technology = Disabled
CPU performance set to HPC
Power Technology set to Custom
CPU Power State C6 set to Enabled
CPU Power State C1 Enhanced set to Disabled
Energy Performance policy set to Performance
Memory RAS configuration set to Maximum Performance
DRAM Clock Throttling Set to Performance
LV DDR Mode set to Performance-mode
```

Continued on next page

Platform Notes (Continued)

```
DRAM Refresh Rate Set to 1x
 Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6818
 $Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
 running on localhost.localdomain Sat Nov  9 00:24:11 2013

 This section contains SUT (System Under Test) info as seen by
 some common utilities.  To remove or add to this section, see:
   http://www.spec.org/cpu2006/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2660 v2 @ 2.20GHz
       2 "physical id"s (chips)
       20 "processors"
    cores, siblings (Caution: counting these is hw and system dependent.  The
    following excerpts from /proc/cpuinfo might not be reliable.  Use with
    caution.)
       cpu cores : 10
       siblings  : 10
       physical 0: cores 0 1 2 3 4 8 9 10 11 12
       physical 1: cores 0 1 2 3 4 8 9 10 11 12
    cache size : 25600 KB

 From /proc/meminfo
    MemTotal:       132088872 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 /usr/bin/lsb_release -d
    Red Hat Enterprise Linux Server release 6.4 (Santiago)

 From /etc/*release* /etc/*version*
    redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
    system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
    system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

 uname -a:
    Linux localhost.localdomain 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41
    EST 2013 x86_64 x86_64 x86_64 GNU/Linux

 run-level 3 Nov 8 22:57

 SPEC is set to: /opt/cpu2006-1.2
    Filesystem     Type    Size  Used Avail Use% Mounted on
    /dev/sda1      ext4    550G   48G  474G  10% /

 Additional information from dmidecode:
   BIOS Cisco Systems, Inc. B200M3.2.1.3a.0.082320131800 08/23/2013
   Memory:
    16x 0xAD00 HMT31GR7EFR4C-RD 8 GB 1866 MHz 2 rank
    8x NO DIMM NO DIMM

 (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64:/opt/cpu2006-1.2/sh"
OMP_NUM_THREADS = "20"

 Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
 memory using RedHat EL 6.4
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

```
    410.bwaves: -DSPEC_CPU_LP64
    416.gamess: -DSPEC_CPU_LP64
      433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
   435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
   437.leslie3d: -DSPEC_CPU_LP64
     444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
    450.soplex: -DSPEC_CPU_LP64
    453.povray: -DSPEC_CPU_LP64
   454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
     465.tonto: -DSPEC_CPU_LP64
       470.lbm: -DSPEC_CPU_LP64
       481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
  482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:
`-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias`

C++ benchmarks:
`-xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias`

Fortran benchmarks:
`-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch`

Benchmarks using both Fortran and C:
`-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias`

Peak Compiler Invocation

C benchmarks:
`icc -m64`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

433.milc: `-xAVX`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-auto-ilp32` `-ansi-alias`

470.lbm: `basepeak = yes`

482.sphinx3: `-xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias -parallel`

Continued on next page

Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html
http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130717.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml
http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130717.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 18:11:59 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 December 2013.