SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX250 S2, Intel Xeon E5-2603 v2, 1.80 GHz

SPECfp®2006 = 51.0

SPECfp_base2006 = 49.6

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Jan-2014
Hardware Availability: Sep-2013
Software Availability: Sep-2013

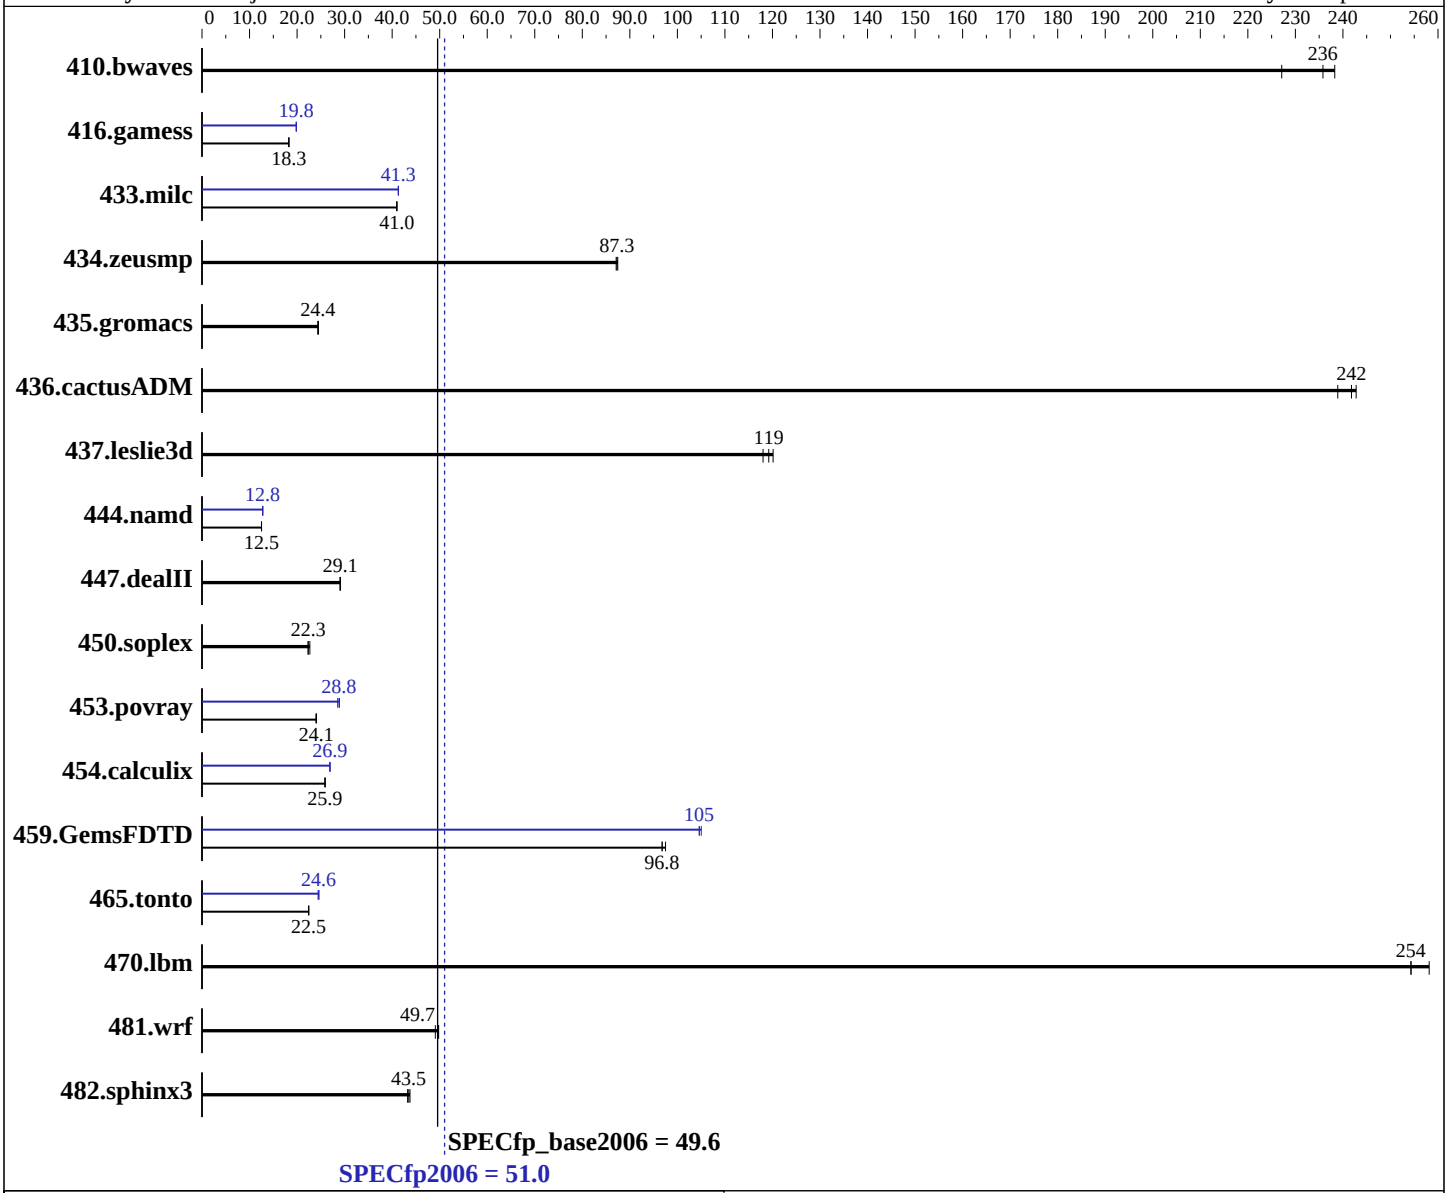

Hardware

CPU Name:	Intel Xeon E5-2603 v2
CPU Characteristics:	
CPU MHz:	1800
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.4 (Santiago) 2.6.32-358.11.1.el6.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux; Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
Auto Parallel:	Yes
File System:	ext4

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX250 S2, Intel Xeon E5-2603 v2, 1.80 GHz

SPECfp2006 = 51.0

SPECfp_base2006 = 49.6

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Jan-2014
Hardware Availability: Sep-2013
Software Availability: Sep-2013

L3 Cache: 10 MB I+D on chip per chip
Other Cache: None
Memory: 128 GB (16 x 8 GB 2Rx8 PC3-14900R-13, ECC, running at 1333 MHz and CL9)
Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	59.8	227	57.0	238	**57.6**	**236**	59.8	227	57.0	238	**57.6**	**236**
416.gamess	**1072**	**18.3**	1072	18.3	1071	18.3	**987**	**19.8**	986	19.9	988	19.8
433.milc	224	41.0	**224**	**41.0**	224	41.0	222	41.3	222	41.3	**222**	**41.3**
434.zeusmp	**104**	**87.3**	104	87.5	104	87.1	**104**	**87.3**	104	87.5	104	87.1
435.gromacs	293	24.4	**293**	**24.4**	292	24.5	293	24.4	**293**	**24.4**	292	24.5
436.cactusADM	50.0	239	49.2	243	**49.4**	**242**	50.0	239	49.2	243	**49.4**	**242**
437.leslie3d	**78.8**	**119**	78.2	120	79.6	118	**78.8**	**119**	78.2	120	79.6	118
444.namd	641	12.5	**640**	**12.5**	640	12.5	628	12.8	628	12.8	**628**	**12.8**
447.dealII	393	29.1	393	29.1	**393**	**29.1**	393	29.1	393	29.1	**393**	**29.1**
450.soplex	374	22.3	**373**	**22.3**	368	22.7	374	22.3	**373**	**22.3**	368	22.7
453.povray	222	24.0	**221**	**24.1**	221	24.1	186	28.5	184	28.9	**185**	**28.8**
454.calculix	319	25.8	318	25.9	**318**	**25.9**	**307**	**26.9**	307	26.9	307	26.9
459.GemsFDTD	**110**	**96.8**	110	96.8	109	97.5	101	105	**101**	**105**	101	105
465.tonto	439	22.4	**438**	**22.5**	438	22.5	**400**	**24.6**	403	24.4	400	24.6
470.lbm	54.0	254	**54.0**	**254**	53.2	258	54.0	254	**54.0**	**254**	53.2	258
481.wrf	224	49.8	228	49.1	**225**	**49.7**	224	49.8	228	49.1	**225**	**49.7**
482.sphinx3	445	43.8	**448**	**43.5**	451	43.2	445	43.8	**448**	**43.5**	451	43.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS configuration:
Energy Performance = Performance
Utilization Profile = Unbalanced
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/SPECcpu2006/libs/32:/SPECcpu2006/libs/64:/SPECcpu2006/sh"
OMP_NUM_THREADS = "8"

 Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
 memory using RedHat EL 6.4
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>

 For information about Fujitsu please visit: http://www.fujitsu.com
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

```
    410.bwaves: -DSPEC_CPU_LP64
    416.gamess: -DSPEC_CPU_LP64
      433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
    435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
     444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
    450.soplex: -DSPEC_CPU_LP64
    453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
      465.tonto: -DSPEC_CPU_LP64
      470.lbm: -DSPEC_CPU_LP64
      481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
  482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:
`-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias`

C++ benchmarks:
`-xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias`

Fortran benchmarks:
`-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch`

Benchmarks using both Fortran and C:
`-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias`

Peak Compiler Invocation

C benchmarks:
`icc -m64`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

433.milc: `-xAVX`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-auto-ilp32` `-ansi-alias`

470.lbm: `basepeak = yes`

482.sphinx3: `basepeak = yes`

C++ benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html
http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20131009.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml
http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20131009.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 20:10:13 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 25 February 2014.