



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B260 M4 (Intel Xeon E7-2890 v2 @ 2.80GHz)

SPECint_rate2006 = 1200

SPECint_rate_base2006 = 1170

CPU2006 license: 9019


Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Feb-2014

Hardware Availability: May-2014

Software Availability: Sep-2013

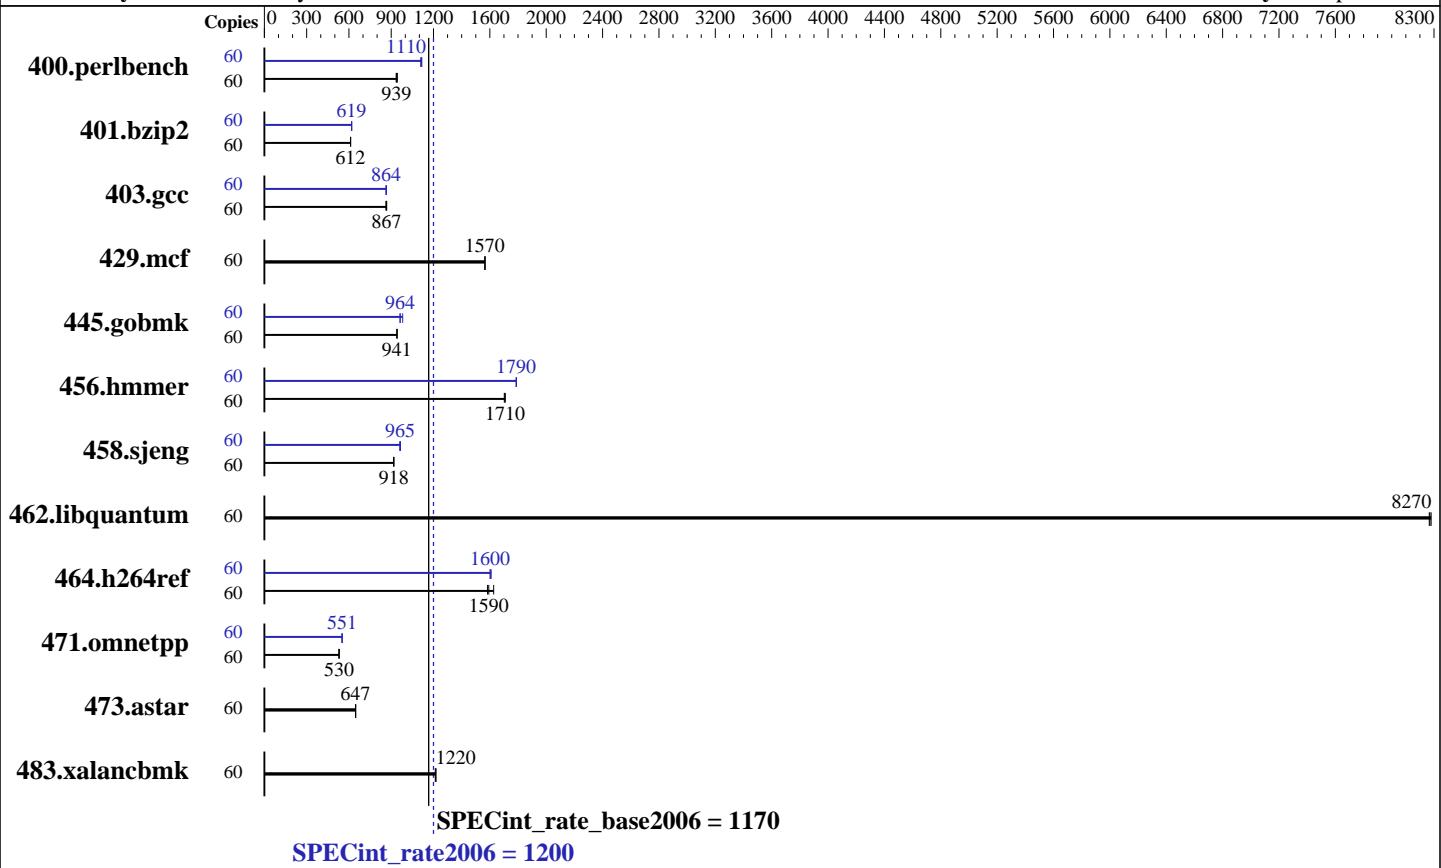

Hardware

CPU Name:	Intel Xeon E7-2890 v2
CPU Characteristics:	Intel Turbo Boost Technology up to 3.40 GHz
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	30 cores, 2 chips, 15 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 Chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	37.5 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC, and CL11)
Disk Subsystem:	1 x 300 GB SAS SATA 15K RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.5 (Santiago) 2.6.32-431.el6.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B260 M4 (Intel Xeon E7-2890 v2 @ 2.80GHz)

SPECint_rate2006 = 1200

SPECint_rate_base2006 = 1170

CPU2006 license: 9019

Test date: Feb-2014

Test sponsor: Cisco Systems

Hardware Availability: May-2014

Tested by: Cisco Systems

Software Availability: Sep-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	60	624	939	627	935	621	944	60	528	1110	525	1120	526	1110
401.bzip2	60	946	612	946	612	947	612	60	935	619	936	619	934	620
403.gcc	60	557	867	556	868	560	862	60	559	864	559	864	558	865
429.mcf	60	350	1570	350	1570	350	1570	60	350	1570	350	1570	350	1570
445.gobmk	60	669	941	668	942	669	940	60	654	962	653	964	641	982
456.hammer	60	329	1700	328	1710	328	1710	60	313	1790	313	1790	313	1790
458.sjeng	60	790	919	791	918	791	918	60	752	966	756	960	753	965
462.libquantum	60	150	8280	150	8270	150	8270	60	150	8280	150	8270	150	8270
464.h264ref	60	816	1630	834	1590	838	1580	60	829	1600	828	1600	825	1610
471.omnetpp	60	708	530	708	530	707	530	60	680	551	680	551	680	552
473.astar	60	649	649	651	647	651	647	60	649	649	651	647	651	647
483.xalancbmk	60	340	1220	341	1210	340	1220	60	340	1220	341	1210	340	1220

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

CPU performance set to Enterprise
 Power Technology set to Custom
 CPU Power State C6 set to Disabled
 CPU Power State C1 Enhanced set to Disabled
 Package C State Limit set to C0/C1 State
 Energy Performance policy set to Performance
 Memory RAS configuration set to Maximum Performance
 DRAM Clock Throttling Set to Performance
 LV DDR Mode set to Performance-mode
 DRAM Refresh Rate Set to Auto
 Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6818
 \$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
 running on YOS-2S Wed Feb 12 14:17:31 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>
 Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B260 M4 (Intel Xeon E7-2890 v2 @ 2.80GHz)

SPECint_rate2006 = 1200

SPECint_rate_base2006 = 1170

CPU2006 license: 9019

Test date: Feb-2014

Test sponsor: Cisco Systems

Hardware Availability: May-2014

Tested by: Cisco Systems

Software Availability: Sep-2013

Platform Notes (Continued)

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E7-2890 v2 @ 2.80GHz
  2 "physical id"s (chips)
  60 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 15
  siblings   : 30
  physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
  physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
cache size : 38400 KB
```

```
From /proc/meminfo
MemTotal:      264067100 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux YOS-2S 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013 x86_64
x86_64 x86_64 GNU/Linux
```

```
run-level 3 Feb 12 14:05
```

```
SPEC is set to: /opt/cpu2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdb1        ext4  275G   32G  229G  13%  /
```

```
Additional information from dmidecode:
BIOS Cisco Systems, Inc. EXM4-1.2.2.1.12.012920142034 01/29/2014
Memory:
 32x 8 GB
 32x 0xCE00 M393B1K70QB0-YK0 8 GB 1333 MHz 2 rank
 16x NO DIMM NO DIMM
```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64:/opt/cpu2006-1.2/sh"

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B260 M4 (Intel Xeon E7-2890 v2 @ 2.80GHz)

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

SPECint_rate2006 = 1200

SPECint_rate_base2006 = 1170

Test date: Feb-2014

Hardware Availability: May-2014

Software Availability: Sep-2013

General Notes (Continued)

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m32
```

C++ benchmarks:

```
icpc -m32
```

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/sh -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m32
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B260 M4 (Intel Xeon E7-2890 v2 @ 2.80GHz)

SPECint_rate2006 = 1200

SPECint_rate_base2006 = 1170

CPU2006 license: 9019

Test date: Feb-2014

Test sponsor: Cisco Systems

Hardware Availability: May-2014

Tested by: Cisco Systems

Software Availability: Sep-2013

Peak Compiler Invocation (Continued)

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`

401.bzip2: `-DSPEC_CPU_LP64`

456.hmmer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`
`-auto-ilp32`

401.bzip2: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`
`-opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `-xSSE4.2 -ipo -O3 -no-prec-div`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)`
`-ansi-alias -opt-mem-layout-trans=3`

456.hmmer: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32`

458.sjeng: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`
`-unroll14 -auto-ilp32`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B260 M4 (Intel Xeon E7-2890 v2 @ 2.80GHz)

SPECint_rate2006 = 1200

SPECint_rate_base2006 = 1170

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Feb-2014

Hardware Availability: May-2014

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

```
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -unroll2 -ansi-alias
```

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
              -L/sh -lsmartheap
```

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=__alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20140311.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20140311.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 21:47:29 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 11 March 2014.