SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R920 (Intel Xeon E7-8880L v2, 2.20 GHz)

SPECint®2006 = 49.7

SPECint_base2006 = 46.5

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jan-2014
Hardware Availability: Mar-2014
Software Availability: Mar-2014

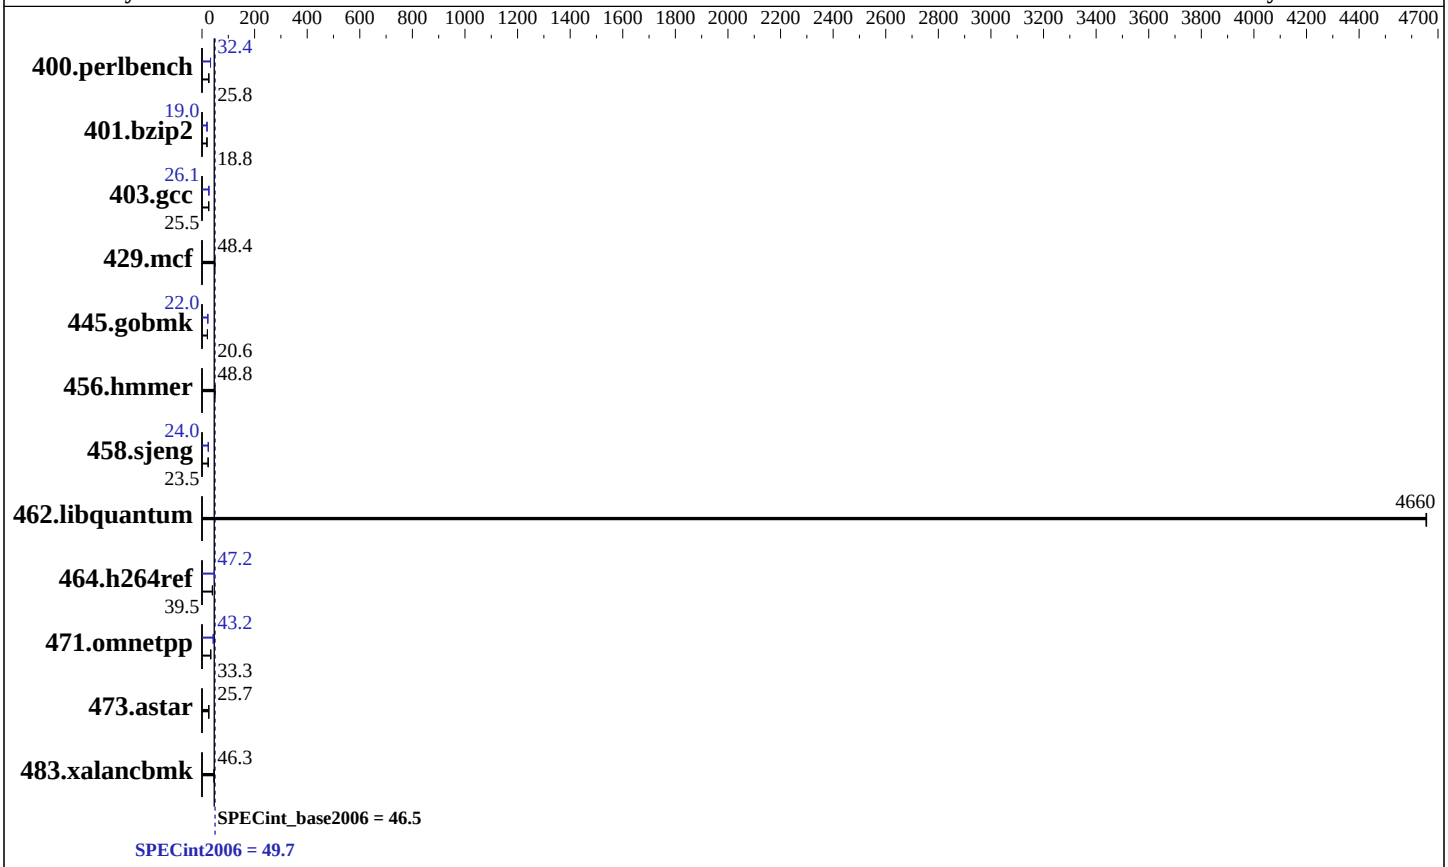

Hardware

CPU Name:	Intel Xeon E7-8880L v2
CPU Characteristics:	Intel Turbo Boost Technology up to 2.80 GHz
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	60 cores, 4 chips, 15 cores/chip
CPU(s) orderable:	2,4 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	37.5 MB I+D on chip per chip
Other Cache:	None
Memory:	1 TB (58 x 16 GB 2Rx4 PC3L-12800R-11 + 6 x 16 GB 2Rx4 PC3-14900R-13, ECC)
Disk Subsystem:	1 x 400 GB SAS6 SSD
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 11 (x86_64) 3.0.76-0.11-default
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
Auto Parallel:	Yes
File System:	ext2
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R920 (Intel Xeon E7-8880L v2, 2.20 GHz)

SPECint2006 = 49.7

SPECint_base2006 = 46.5

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jan-2014
Hardware Availability: Mar-2014
Software Availability: Mar-2014

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	379	25.8	379	25.7	**379**	**25.8**	301	32.4	302	32.4	**302**	**32.4**
401.bzip2	**513**	**18.8**	513	18.8	513	18.8	507	19.0	**507**	**19.0**	507	19.0
403.gcc	**316**	**25.5**	317	25.4	315	25.5	**308**	**26.1**	308	26.1	308	26.1
429.mcf	188	48.4	**188**	**48.4**	188	48.5	188	48.4	**188**	**48.4**	188	48.5
445.gobmk	**508**	**20.6**	508	20.6	509	20.6	476	22.0	**476**	**22.0**	476	22.0
456.hmmer	190	49.0	192	48.6	**191**	**48.8**	190	49.0	192	48.6	**191**	**48.8**
458.sjeng	**516**	**23.5**	516	23.5	516	23.4	505	24.0	**505**	**24.0**	505	23.9
462.libquantum	**4.45**	**4660**	4.45	4650	4.45	4660	**4.45**	**4660**	4.45	4650	4.45	4660
464.h264ref	**560**	**39.5**	561	39.4	558	39.6	469	47.2	**469**	**47.2**	470	47.1
471.omnetpp	191	32.8	**188**	**33.3**	187	33.3	149	42.1	**145**	**43.2**	144	43.4
473.astar	273	25.7	273	25.7	**273**	**25.7**	273	25.7	273	25.7	**273**	**25.7**
483.xalancbmk	**149**	**46.3**	149	46.4	149	46.3	**149**	**46.3**	149	46.4	149	46.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS settings:
Virtualization Technology disabled
Execute Disable disabled
System Profile set to Custom
Logical Processor disabled
Memory Patrol Scrub set to disabled
 Sysinfo program
 /root/Desktop/Performance/ic14.0_Oct17_2013/config/sysinfo.rev6818
 $Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
 running on slesperf2 Sat Jan 25 15:05:38 2014

 This section contains SUT (System Under Test) info as seen by
 some common utilities.  To remove or add to this section, see:
   http://www.spec.org/cpu2006/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E7-8880L v2 @ 2.20GHz
       4 "physical id"s (chips)
       60 "processors"
    cores, siblings (Caution: counting these is hw and system dependent.  The
    following excerpts from /proc/cpuinfo might not be reliable.  Use with
    caution.)
       cpu cores : 15
```

Continued on next page

Platform Notes (Continued)

```
        siblings  : 15
        physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
        physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
        physical 2: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
        physical 3: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
     cache size : 38400 KB

  From /proc/meminfo
     MemTotal:       1058789108 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /usr/bin/lsb_release -d
     SUSE Linux Enterprise Server 11 (x86_64)

  From /etc/*release* /etc/*version*
     SuSE-release:
        SUSE Linux Enterprise Server 11 (x86_64)
        VERSION = 11
        PATCHLEVEL = 3

  uname -a:
     Linux slesperf2 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013
     (ccab990) x86_64 x86_64 x86_64 GNU/Linux

  run-level 3 Jan 25 14:47 last=S

  SPEC is set to: /root/Desktop/Performance/ic14.0_Oct17_2013
     Filesystem     Type  Size  Used Avail Use% Mounted on
     /dev/sda2      ext2  365G  190G  174G  53% /

  Additional information from dmidecode:
    BIOS Dell Inc. 1.0.0 12/16/2013
    Memory:
     41x 00CE00B300CE M393B2G70BH0-YK0 16 GB 1333 MHz
     6x 00CE00B300CE M393B2G70CB0-CMA 16 GB 1333 MHz
     11x 00CE04B300CE M393B2G70BH0-YK0 16 GB 1333 MHz
     6x 00CE04B300CE M393B2G70CB0-YK0 16 GB 1333 MHz

  (End of data from sysinfo program)
  Regarding the sysinfo display about the memory installed, although the information
  is accurate, two different types of DIMMs were used in the configuration and it may
  not be easy to immediately tell the difference.  The following has been provided to
  help make the situation more clear.
     DIMMs with â  M393B2G70BH0-YK0â   in the name are 16 GB PC3L-12800R-11 DIMMs
     DIMMs with â  M393B2G70CB0-CMAâ   in the name are 16 GB PC3-14900R-13 DIMMs
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/root/Desktop/Performance/ic14.0_Oct17_2013/libs/32:/root/Desktop/Performance/ic14.0_Oct17_2013/libs/64:/root/Desktop/Performance/ic14.0_Oct17_2013/sh"
OMP_NUM_THREADS = "60"

 Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
 memory using RedHat EL 6.4
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
icc  -m64
```

C++ benchmarks:
```
icpc -m64
```

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32
```

C++ benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh -lsmartheap64
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m64`

400.perlbench: `icc -m32`

445.gobmk: `icc -m32`

464.h264ref: `icc -m32`

C++ benchmarks (except as noted below):
`icpc -m64`

471.omnetpp: `icpc -m32`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
473.astar: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2)
`-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2)
`-opt-prefetch -ansi-alias`

401.bzip2: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2)
`-O3`(pass 2) `-no-prec-div -prof-use`(pass 2) `-auto-ilp32`
`-opt-prefetch -ansi-alias`

Continued on next page

Peak Optimization Flags (Continued)

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -inline-calloc
-opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias

456.hmmer: basepeak = yes

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html
http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revC.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml
http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revC.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 21:33:03 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 11 March 2014.