



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint[®]_rate2006 = **858**

ProLiant BL460c Gen8
(2.80 GHz, Intel Xeon E5-2680 v2)

SPECint_rate_base2006 = **828**

CPU2006 license: 3


Test date: Jan-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Dec-2013

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

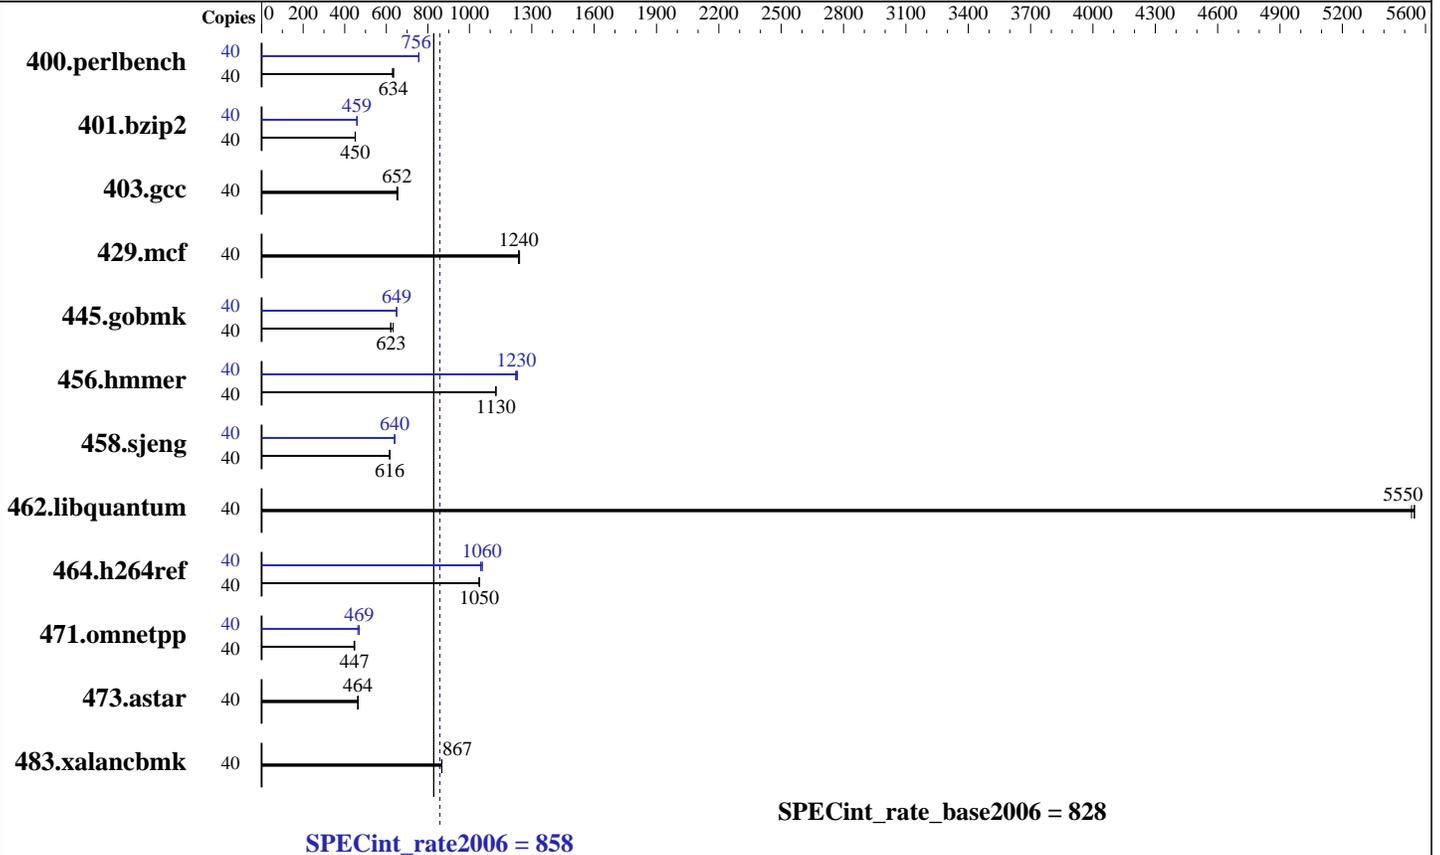

Hardware

CPU Name: Intel Xeon E5-2680 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz
 CPU MHz: 2800
 FPU: Integrated
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 25 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-14900R-13, ECC)
 Disk Subsystem: 1 x 900 GB 10 K SAS, RAID 0
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.4, (Santiago)
 Kernel 2.6.32-358.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = **858**

ProLiant BL460c Gen8
(2.80 GHz, Intel Xeon E5-2680 v2)

SPECint_rate_base2006 = **828**

CPU2006 license: 3

Test date: Jan-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Dec-2013

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
400.perlbench	40	615	635	621	630	616	634	40	517	756	517	756	516	757		
401.bzip2	40	858	450	855	451	857	450	40	841	459	841	459	842	458		
403.gcc	40	495	651	491	656	494	652	40	495	651	491	656	494	652		
429.mcf	40	294	1240	295	1240	295	1240	40	294	1240	295	1240	295	1240		
445.gobmk	40	663	633	674	623	676	621	40	646	649	646	649	646	649		
456.hammer	40	332	1130	331	1130	331	1130	40	304	1230	303	1230	305	1220		
458.sjeng	40	785	616	786	616	785	617	40	756	640	757	640	756	640		
462.libquantum	40	149	5550	149	5550	150	5530	40	149	5550	149	5550	150	5530		
464.h264ref	40	845	1050	844	1050	847	1050	40	840	1050	834	1060	834	1060		
471.omnetpp	40	558	448	562	445	559	447	40	533	469	533	469	540	463		
473.astar	40	605	464	607	462	605	464	40	605	464	607	462	605	464		
483.xalancbmk	40	318	867	318	868	319	866	40	318	867	318	868	319	866		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
Disabled unused Linux services through "stop_services.sh" before running.

Platform Notes

BIOS Configuration:
HP Power Profile set to Maximum Performance
Memory Power Savings Mode set to Maximum Performance
Collaborative Power Control set to Disabled
Dynamic Power Capping Functionality set to Disabled
Thermal Configuration set to Maximum Cooling
Processor Power and Utilization Monitoring set to Disabled
Memory Refresh Rate set to 1x

Sysinfo program /cpu2006/config/sysinfo.rev6818
Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 858

ProLiant BL460c Gen8
(2.80 GHz, Intel Xeon E5-2680 v2)

SPECint_rate_base2006 = 828

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Jan-2014
Hardware Availability: Dec-2013
Software Availability: Sep-2013

Platform Notes (Continued)

\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on BL460c-Gen8 Tue Jan 28 11:35:15 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2680 v2 @ 2.80GHz
 2 "physical id"s (chips)
 40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 10
siblings : 20
physical 0: cores 0 1 2 3 4 8 9 10 11 12
physical 1: cores 0 1 2 3 4 8 9 10 11 12
cache size : 25600 KB
```

```
From /proc/meminfo
MemTotal: 132259576 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux BL460c-Gen8 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jan 28 11:33
```

```
SPEC is set to: /cpu2006
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda3 ext4 824G 14G 769G 2% /
```

```
Additional information from dmidecode:
BIOS HP I31 12/20/2013
Memory:
16x HP 712382-071 8 GB 1866 MHz 2 rank
```

(End of data from sysinfo program)



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 858

ProLiant BL460c Gen8
(2.80 GHz, Intel Xeon E5-2680 v2)

SPECint_rate_base2006 = 828

CPU2006 license: 3

Test date: Jan-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Dec-2013

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

400.perlbench: icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 858

ProLiant BL460c Gen8
(2.80 GHz, Intel Xeon E5-2680 v2)

SPECint_rate_base2006 = 828

CPU2006 license: 3

Test date: Jan-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Dec-2013

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

Peak Compiler Invocation (Continued)

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`
`-auto-ilp32`

401.bzip2: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`
`-opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `basepeak = yes`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)`
`-ansi-alias -opt-mem-layout-trans=3`

456.hmmer: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32`

458.sjeng: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`
`-unroll4 -auto-ilp32`

462.libquantum: `basepeak = yes`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 858

ProLiant BL460c Gen8
(2.80 GHz, Intel Xeon E5-2680 v2)

SPECint_rate_base2006 = 828

CPU2006 license: 3

Test date: Jan-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Dec-2013

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revD.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 23:01:30 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 20 May 2014.