



# SPEC® CINT2006 Result


Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei Huawei RH2288H v2

SPECint®\_rate2006 = 749  
SPECint\_rate\_base2006 = 723

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: May-2014  
Hardware Availability: Sep-2013  
Software Availability: Nov-2013

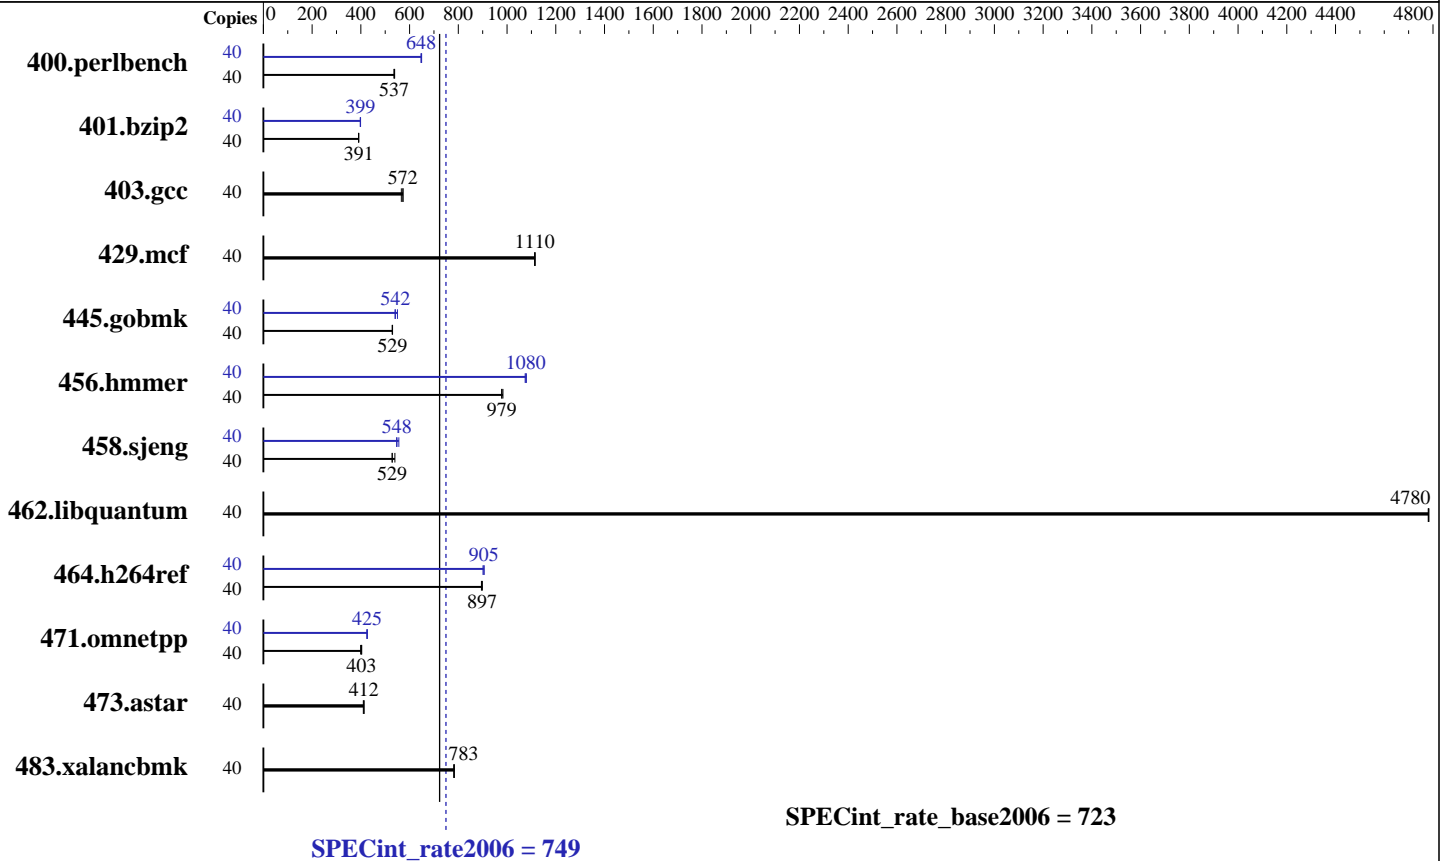

### Hardware

CPU Name: Intel Xeon E5-2658 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 25 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC)  
 Disk Subsystem: 1 X 300 GB SAS 10000RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 2.6.32-431.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei  
Huawei RH2288H v2

SPECint\_rate2006 = 749

SPECint\_rate\_base2006 = 723

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: May-2014  
Hardware Availability: Sep-2013  
Software Availability: Nov-2013

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	40	725	539	<b><u>728</u></b>	<b><u>537</u></b>	729	536	40	<b><u>603</u></b>	<b><u>648</u></b>	602	649	604	647
401.bzip2	40	987	391	<b><u>987</u></b>	<b><u>391</u></b>	988	391	40	968	399	<b><u>968</u></b>	<b><u>399</u></b>	971	397
403.gcc	40	<b><u>562</u></b>	<b><u>572</u></b>	569	566	562	573	40	<b><u>562</u></b>	<b><u>572</u></b>	569	566	562	573
429.mcf	40	328	1110	327	1120	<b><u>327</u></b>	<b><u>1110</u></b>	40	328	1110	327	1120	<b><u>327</u></b>	<b><u>1110</u></b>
445.gobmk	40	<b><u>793</u></b>	<b><u>529</u></b>	791	530	793	529	40	777	540	<b><u>775</u></b>	<b><u>542</u></b>	763	550
456.hammer	40	382	978	<b><u>381</u></b>	<b><u>979</u></b>	380	983	40	346	1080	347	1070	<b><u>347</u></b>	<b><u>1080</u></b>
458.sjeng	40	897	540	<b><u>915</u></b>	<b><u>529</u></b>	916	528	40	885	547	<b><u>883</u></b>	<b><u>548</u></b>	871	556
462.libquantum	40	173	4780	173	4780	<b><u>173</u></b>	<b><u>4780</u></b>	40	173	4780	173	4780	<b><u>173</u></b>	<b><u>4780</u></b>
464.h264ref	40	<b><u>987</u></b>	<b><u>897</u></b>	989	895	985	898	40	<b><u>978</u></b>	<b><u>905</u></b>	982	901	977	906
471.omnetpp	40	<b><u>620</u></b>	<b><u>403</u></b>	627	399	620	403	40	586	427	588	425	<b><u>588</u></b>	<b><u>425</u></b>
473.astar	40	<b><u>681</u></b>	<b><u>412</u></b>	680	413	685	410	40	<b><u>681</u></b>	<b><u>412</u></b>	680	413	685	410
483.xalancbmk	40	352	784	<b><u>353</u></b>	<b><u>783</u></b>	353	781	40	352	784	<b><u>353</u></b>	<b><u>783</u></b>	353	781

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
Set Power Efficiency Mode to Performance  
Sysinfo program /spec/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on localhost.localdomain Tue May 6 15:26:02 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-2658 v2 @ 2.40GHz  
2 "physical id"s (chips)  
40 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 749

Huawei RH2288H v2

SPECint\_rate\_base2006 = 723

CPU2006 license: 3175

Test date: May-2014

Test sponsor: Huawei

Hardware Availability: Sep-2013

Tested by: Huawei

Software Availability: Nov-2013

## Platform Notes (Continued)

```

cpu cores : 10
siblings  : 20
physical 0: cores 0 1 2 3 4 8 9 10 11 12
physical 1: cores 0 1 2 3 4 8 9 10 11 12
cache size : 25600 KB

```

From /proc/meminfo

```

MemTotal:      264480104 kB
HugePages_Total:    0
Hugepagesize:    2048 kB

```

/usr/bin/lsb\_release -d

Red Hat Enterprise Linux Server release 6.5 (Santiago)

From /etc/\*release\* /etc/\*version\*

```

redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

uname -a:

```

Linux localhost.localdomain 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54
EST 2013 x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 May 6 14:59

SPEC is set to: /spec

```

Filesystem      Type      Size      Used      Avail      Use%      Mounted on
/dev/sda2        ext4      265G      114G      138G      46%      /

```

Additional information from dmidecode:

```

BIOS Insyde Corp. OARYV388 04/23/2014
Memory:
16x Micron 36JSF2G72PZ-1G9E1 16 GB 1866 MHz 2 rank
8x NO DIMM NO DIMM

```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei RH2288H v2

SPECint\_rate2006 = 749

SPECint\_rate\_base2006 = 723

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: May-2014  
Hardware Availability: Sep-2013  
Software Availability: Nov-2013

## Base Compiler Invocation

C benchmarks:  
icc -m32  
  
C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
  
C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32  
  
400.perlbench: icc -m64  
401.bzip2: icc -m64  
456.hmmer: icc -m64  
458.sjeng: icc -m64  
  
C++ benchmarks:  
icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei  
Huawei RH2288H v2

SPECint\_rate2006 = 749

SPECint\_rate\_base2006 = 723

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: May-2014  
Hardware Availability: Sep-2013  
Software Availability: Nov-2013

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32  
401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias  
403.gcc: basepeak = yes  
429.mcf: basepeak = yes  
445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3  
456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32  
462.libquantum: basepeak = yes  
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap  
473.astar: basepeak = yes

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei RH2288H v2

SPECint\_rate2006 = 749

SPECint\_rate\_base2006 = 723

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: May-2014

Hardware Availability: Sep-2013

Software Availability: Nov-2013

## Peak Optimization Flags (Continued)

483.xalanbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 23:59:02 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 4 June 2014.