SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

ASUS Z97-A motherboard (Intel Core i7-4790K)

SPECfp®2006 = 79.7

SPECfp_base2006 = 77.7

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Mar-2015
Hardware Availability: May-2014
Software Availability: Oct-2013

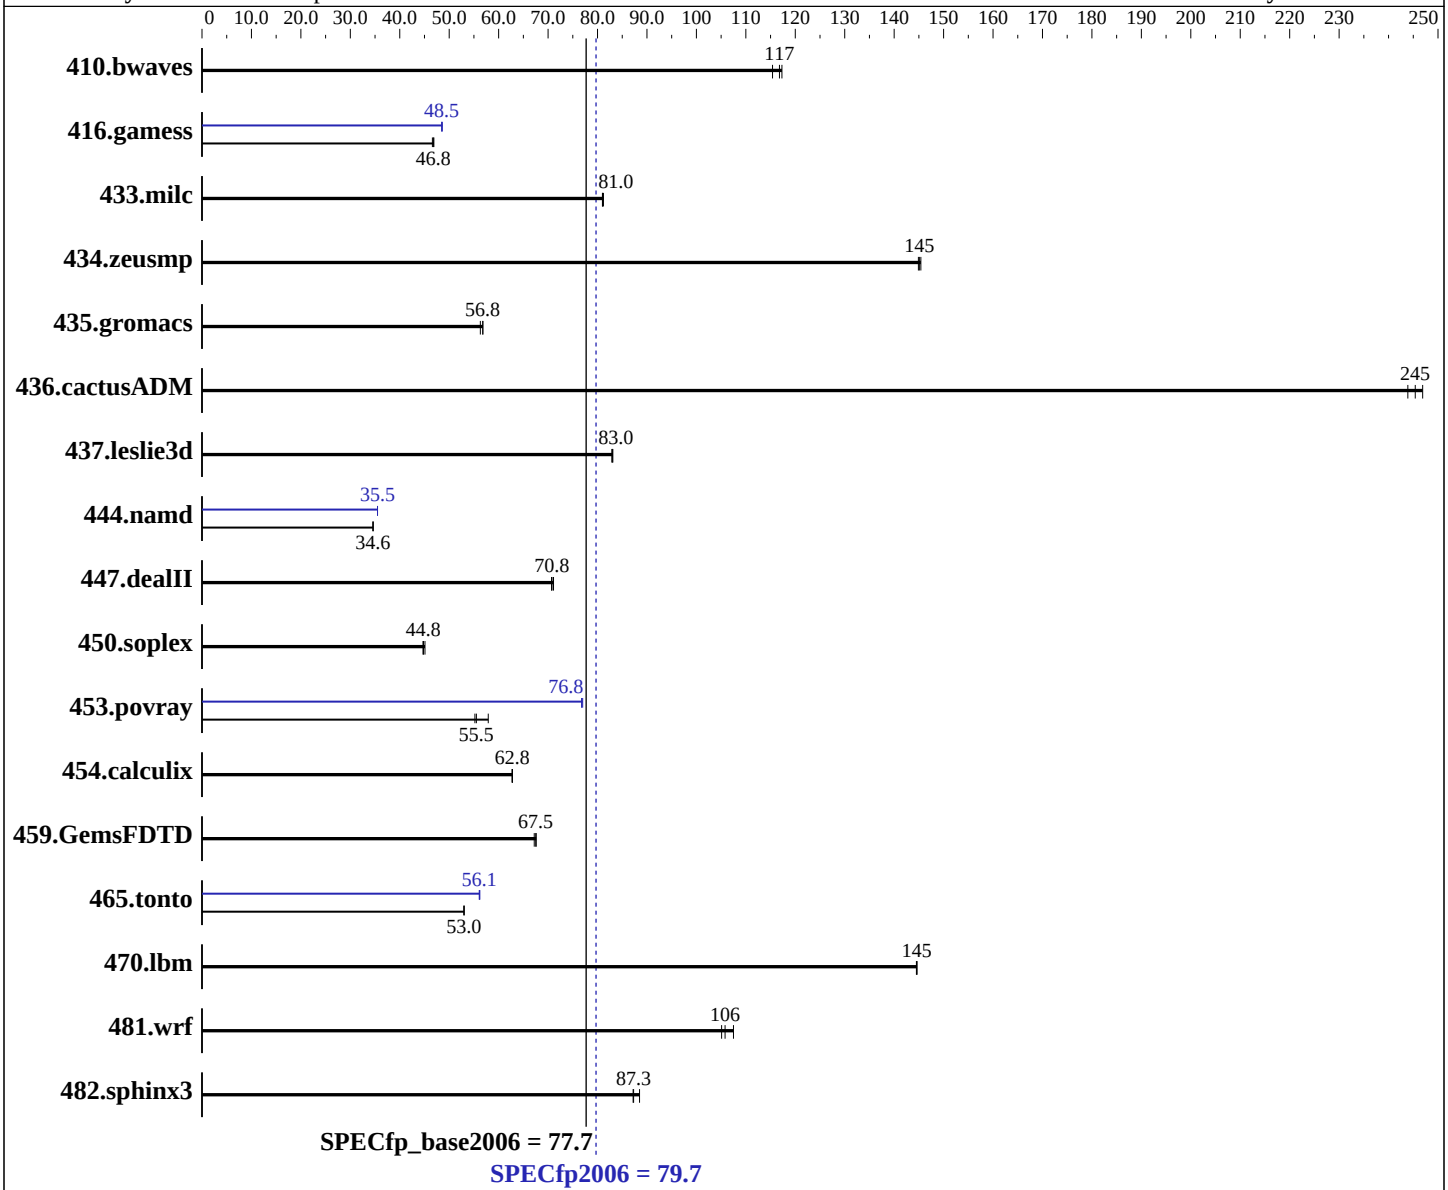

Hardware

CPU Name:	Intel Core i7-4790K
CPU Characteristics:	Intel Turbo Boost Technology up to 4.40 GHz
CPU MHz:	4000
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Microsoft Windows 8.1 Pro 6.3.9600 N/A Build 9600
Compiler:	C/C++: Version 14.0.1.139 of Intel C++ Studio XE for Windows; Fortran: Version 14.0.1.139 of Intel Fortran Studio XE for Windows; Libraries: Version 16.00.30319.01 of Microsoft Visual Studio 2010 Professional SP1
Auto Parallel:	Yes

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

ASUS Z97-A motherboard (Intel Core i7-4790K)

SPECfp2006 = 79.7

SPECfp_base2006 = 77.7

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Mar-2015
Hardware Availability: May-2014
Software Availability: Oct-2013

L3 Cache:	8 MB I+D on chip per chip
Other Cache:	None
Memory:	8 GB (2 x 4 GB 2Rx4 PC3-12800U-11)
Disk Subsystem:	1 TB Seagate HDD 7200 RPM
Other Hardware:	None

File System:	NTFS
System State:	Default
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap Library Version 10.0 from http://www.microquill.com/

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	118	115	**116**	**117**	116	117	118	115	**116**	**117**	116	117
416.gamess	420	46.6	**418**	**46.8**	418	46.9	404	48.5	**403**	**48.5**	403	48.6
433.milc	113	81.0	113	81.2	**113**	**81.0**	113	81.0	113	81.2	**113**	**81.0**
434.zeusmp	**62.7**	**145**	62.6	145	62.8	145	**62.7**	**145**	62.6	145	62.8	145
435.gromacs	127	56.3	**126**	**56.8**	126	56.8	127	56.3	**126**	**56.8**	126	56.8
436.cactusADM	49.0	244	**48.7**	**245**	48.4	247	49.0	244	**48.7**	**245**	48.4	247
437.leslie3d	113	82.9	**113**	**83.0**	113	83.1	113	82.9	**113**	**83.0**	113	83.1
444.namd	232	34.6	**232**	**34.6**	232	34.6	226	35.5	**226**	**35.5**	226	35.5
447.dealII	162	70.7	161	71.1	**162**	**70.8**	162	70.7	161	71.1	**162**	**70.8**
450.soplex	185	45.1	186	44.7	**186**	**44.8**	185	45.1	186	44.7	**186**	**44.8**
453.povray	91.9	57.9	**95.9**	**55.5**	96.4	55.2	69.1	77.0	**69.3**	**76.8**	69.3	76.8
454.calculix	131	62.8	132	62.7	**131**	**62.8**	131	62.8	132	62.7	**131**	**62.8**
459.GemsFDTD	**157**	**67.5**	158	67.2	157	67.6	**157**	**67.5**	158	67.2	157	67.6
465.tonto	186	53.0	186	53.0	**186**	**53.0**	175	56.2	175	56.1	**175**	**56.1**
470.lbm	95.0	145	**95.0**	**145**	95.1	145	95.0	145	**95.0**	**145**	95.1	145
481.wrf	106	105	**106**	**106**	104	108	106	105	**106**	**106**	104	108
482.sphinx3	220	88.5	**223**	**87.3**	224	87.2	220	88.5	**223**	**87.3**	224	87.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

```
To compile these binaries, the Intel Compiler 14.0 was set up to
generate 64-bit binaries with the command:
"ipsxe-comp-vars.bat intel64 vs2010" (shortcut provided in the Intel(r)
Parallel Studio XE 2013 program folder)
```

Platform Notes

```
Sysinfo program C:\SPEC14.0/Docs/sysinfo
$Rev: 6775 $ $Date:: 2011-08-16 #$ \8787f7622badcf24e01c368b1db4377c
running on Z97A Wed Mar 25 06:33:24 2015

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
```

Continued on next page

Platform Notes (Continued)

```
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

Trying 'systeminfo'
OS Name       : Microsoft Windows 8.1 Pro
OS Version    : 6.3.9600 N/A Build 9600
System Manufacturer: ASUS
System Model  : All Series
Processor(s)  : 1 Processor(s) Installed.
     [01]: Intel64 Family 6 Model 60 Stepping 3 GenuineIntel ~4001 Mhz
BIOS Version  : American Megatrends Inc. 0702, 4/23/2014
Total Physical Memory: 8,069 MB

Trying 'wmic cpu get /value'
DeviceID      : CPU0
L2CacheSize   : 1024
L3CacheSize   : 8192
MaxClockSpeed : 4001
Name          : Intel(R) Core(TM) i7-4790K CPU @ 4.00GHz
NumberOfCores : 4
NumberOfLogicalProcessors: 8

(End of data from sysinfo program)
BIOS: SATA mode set to RAID
Windows Disk Driver: Intel Rapid Storage Technology 12.9.0.1001
```

Component Notes

```
Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply
```

General Notes

```
OMP_NUM_THREADS set to number of processors cores
KMP_AFFINITY set to granularity=fine,scatter
Binaries compiled on a system with 1x Intel Core i7-860 CPU
+ 8GB memory using Windows 7 Enterprise 64-bit
```

Base Compiler Invocation

C benchmarks:

```
icl -Qvc10 -Qstd=c99
```

C++ benchmarks:

```
icl -Qvc10
```

Fortran benchmarks:

```
ifort
```

Continued on next page

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:
icl -Qvc10 -Qstd=c99 ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_P64
416.gamess: -DSPEC_CPU_P64
433.milc: -DSPEC_CPU_P64
434.zeusmp: -DSPEC_CPU_P64
435.gromacs: -DSPEC_CPU_P64
436.cactusADM: -DSPEC_CPU_P64 -names:lowercase /assume:underscore
437.leslie3d: -DSPEC_CPU_P64
444.namd: -DSPEC_CPU_P64 /TP
447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
-Qoption,cpp,--ms_incompat_treatment_of_commas_in_macros
450.soplex: -DSPEC_CPU_P64
453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_NEED_INVHYP -DNEED_INVHYP
454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER -names:lowercase
459.GemsFDTD: -DSPEC_CPU_P64
465.tonto: -DSPEC_CPU_P64
470.lbm: -DSPEC_CPU_P64
481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
482.sphinx3: -DSPEC_CPU_P64

Base Optimization Flags

C benchmarks:
-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias
-Qopt-prefetch -Qauto-ilp32 /F1000000000

C++ benchmarks:
-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias
-Qopt-prefetch -Qcxx-features -Qauto-ilp32 /F1000000000 shlW64M.lib
-link /FORCE:MULTIPLE

Fortran benchmarks:
-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias
-Qopt-prefetch /F1000000000

Benchmarks using both Fortran and C:
-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias
-Qopt-prefetch -Qauto-ilp32 /F1000000000

Peak Compiler Invocation

C benchmarks:
```
icl -Qvc10 -Qstd=c99
```

C++ benchmarks:
```
icl -Qvc10
```

Fortran benchmarks:
```
ifort
```

Benchmarks using both Fortran and C:
```
icl -Qvc10 -Qstd=c99 ifort
```

Peak Portability Flags

```
Same as Base Portability Flags
```

Peak Optimization Flags

C benchmarks:

433.milc: `basepeak = yes`

470.lbm: `basepeak = yes`

482.sphinx3: `basepeak = yes`

C++ benchmarks:

444.namd: `-QxCORE-AVX2`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2)
`-Qipo -O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000`
`shlW64M.lib -link /FORCE:MULTIPLE`

447.dealII: `basepeak = yes`

450.soplex: `basepeak = yes`

453.povray: `-QxCORE-AVX2`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2)
`-Qipo -O3 -Qprec-div- -Qunroll4 -Qansi-alias -Qauto-ilp32`
`/F1000000000 shlW64M.lib -link /FORCE:MULTIPLE`

Fortran benchmarks:

410.bwaves: `basepeak = yes`

416.gamess: `-QxCORE-AVX2`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2)
`-Qipo -O3 -Qprec-div- -Qunroll2 -Ob0 -Qansi-alias`
`-Qscalar-rep- /F1000000000`

Continued on next page

Peak Optimization Flags (Continued)

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4 -Qauto -Qinline-calloc /F1000000000

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Sep 9 10:44:57 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 18 June 2014.