SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DH87MC Motherboard (Intel Celeron G1820)

SPECint®2006 = 38.1

SPECint_base2006 = 36.6

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Jun-2014
Hardware Availability: Dec-2013
Software Availability: Oct-2013

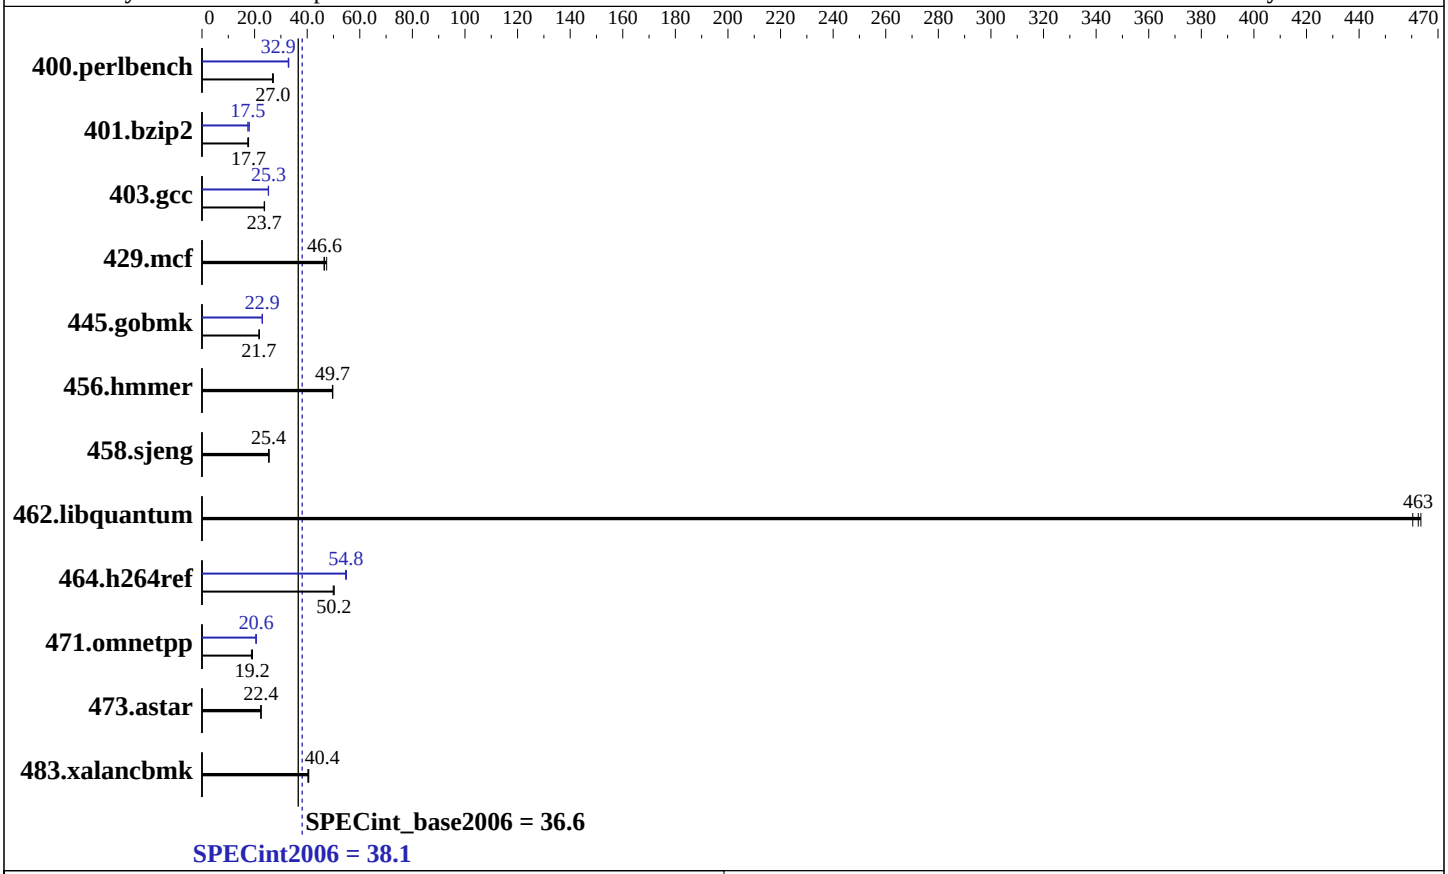

Hardware

CPU Name:	Intel Celeron G1820
CPU Characteristics:	
CPU MHz:	2694
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	2 MB I+D on chip per chip
Other Cache:	None
Memory:	8 GB (2 x 4 GB 2Rx4 PC3-12800U-11, running at 1333 MHz and CL9)
Disk Subsystem:	1 TB Seagate SATA HDD, 7200 RPM
Other Hardware:	None

Software

Operating System:	Microsoft Windows 8.1 Pro 6.3.9600 N/A Build 9600
Compiler:	C/C++: Version 14.0.1.139 of Intel C++ Studio XE for Windows; Libraries: Version 16.00.30319.01 of Microsoft Visual Studio 2010 Professional SP1
Auto Parallel:	Yes
File System:	NTFS
System State:	Default
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap Library Version 10.0 from http://www.microquill.com/

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DH87MC Motherboard (Intel Celeron G1820)

SPECint2006 = 38.1

SPECint_base2006 = 36.6

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Jun-2014
Hardware Availability: Dec-2013
Software Availability: Oct-2013

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	364	26.8	361	27.1	**362**	**27.0**	296	33.0	298	32.8	**297**	**32.9**
401.bzip2	546	17.7	**546**	**17.7**	554	17.4	**551**	**17.5**	538	18.0	553	17.5
403.gcc	339	23.7	339	23.8	**339**	**23.7**	319	25.3	320	25.2	**319**	**25.3**
429.mcf	192	47.4	197	46.4	**196**	**46.6**	192	47.4	197	46.4	**196**	**46.6**
445.gobmk	**482**	**21.7**	482	21.8	482	21.7	458	22.9	**457**	**22.9**	456	23.0
456.hmmer	188	49.7	**188**	**49.7**	188	49.6	188	49.7	**188**	**49.7**	188	49.6
458.sjeng	**476**	**25.4**	475	25.5	476	25.4	**476**	**25.4**	475	25.5	476	25.4
462.libquantum	45.0	460	**44.8**	**463**	44.7	464	45.0	460	**44.8**	**463**	44.7	464
464.h264ref	444	49.9	**441**	**50.2**	441	50.2	403	54.9	405	54.6	**404**	**54.8**
471.omnetpp	325	19.2	**325**	**19.2**	333	18.8	304	20.6	305	20.5	**304**	**20.6**
473.astar	313	22.5	**314**	**22.4**	314	22.4	313	22.5	**314**	**22.4**	314	22.4
483.xalancbmk	170	40.6	171	40.3	**171**	**40.4**	170	40.6	171	40.3	**171**	**40.4**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

```
To compile these binaries, the Intel Compiler 14.0 was set up to
generate 64-bit binaries with the command:
"ipsxe-comp-vars.bat intel64 vs2010" (shortcut provided in the Intel(r)
Parallel Studio XE 2013 program folder)
```

Platform Notes

```
Sysinfo program C:\SPEC14.0/Docs/sysinfo
$Rev: 6775 $ $Date:: 2011-08-16 #$ \8787f7622badcf24e01c368b1db4377c
running on Clt54BEF70B2EDF Fri Jun 27 16:53:32 2014

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

Trying 'systeminfo'
OS Name       : Microsoft Windows 8.1 Pro
OS Version    : 6.3.9600 N/A Build 9600
System Manufacturer: INTEL_
System Model  : DH87MC__
Processor(s)  : 1 Processor(s) Installed.
     [01]: Intel64 Family 6 Model 60 Stepping 3 GenuineIntel ~2694 Mhz
BIOS Version  : Intel Corp. MCH8710H.86A.0047.2013.0606.1508, 6/6/2013
Total Physical Memory: 7,864 MB

Trying 'wmic cpu get /value'
DeviceID      : CPU0
```

Continued on next page

Platform Notes (Continued)

```
L2CacheSize   : 512
L3CacheSize   : 2048
MaxClockSpeed : 2694
Name          : Intel(R) Celeron(R) CPU G1820 @ 2.70GHz
NumberOfCores : 2
NumberOfLogicalProcessors: 2

(End of data from sysinfo program)
```

Component Notes

```
Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply
```

General Notes

```
OMP_NUM_THREADS set to number of processors cores
KMP_AFFINITY set to granularity=fine,scatter
Binaries compiled on a system with 1x Intel Core i7-860 CPU
+ 8GB memory using Windows 7 Enterprise 64-bit
```

Base Compiler Invocation

C benchmarks:

```
icl -Qvc10 -Qstd=c99
```

C++ benchmarks:

```
icl -Qvc10
```

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_P64 -DSPEC_CPU_WIN64_X64
               -DSPEC_CPU_NO_NEED_VA_COPY
  401.bzip2: -DSPEC_CPU_P64
    403.gcc: -DSPEC_CPU_P64 -DSPEC_CPU_WIN64
    429.mcf: -DSPEC_CPU_P64
  445.gobmk: -DSPEC_CPU_P64
  456.hmmer: -DSPEC_CPU_P64
  458.sjeng: -DSPEC_CPU_P64
462.libquantum: -DSPEC_CPU_P64
  464.h264ref: -DSPEC_CPU_P64 -DWIN32 -DSPEC_CPU_NO_INTTYPES
  471.omnetpp: -DSPEC_CPU_P64 -DSPEC_CPU_WIN64
    473.astar: -DSPEC_CPU_P64
483.xalancbmk: -DSPEC_CPU_P64 -Qoption,cpp,--no_wchar_t_keyword
```

Base Optimization Flags

C benchmarks:
```
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qparallel
-Qauto-ilp32 /F512000000
```

C++ benchmarks:
```
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
-Qauto-ilp32 /F512000000 shlW64M.lib            -link /FORCE:MULTIPLE
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks:
```
icl -Qvc10 -Qstd=c99
```

C++ benchmarks:
```
icl -Qvc10
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

400.perlbench: `-QxSSE4.2`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2)
`-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch`
`-Qauto-ilp32 /F512000000 shlW64M.lib`
`-link /FORCE:MULTIPLE`

401.bzip2: `-QxSSE4.2`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2)
`-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias`
`-Qauto-ilp32 /F512000000`

403.gcc: `-QxSSE4.2`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2)
`-Qipo -O3 -Qprec-div- -Qauto-ilp32 /F512000000`

Continued on next page

Peak Optimization Flags (Continued)

429.mcf: basepeak = yes

445.gobmk: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O2 -Qprec-div- -Qansi-alias -Qauto-ilp32 /F512000000

456.hmmer: basepeak = yes

458.sjeng: basepeak = yes

462.libquantum: basepeak = yes

464.h264ref: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias -Qauto-ilp32 /F512000000

C++ benchmarks:

471.omnetpp: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-ra-region-strategy=block -Qauto-ilp32 /F512000000 shlW64M.lib -link /FORCE:MULTIPLE

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Jul 30 10:54:22 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 July 2014.