



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS F2A85-M PRO Motherboard (AMD A10-6800K APU
with Radeon HD Graphics)

SPECint_rate2006 = 93.8

SPECint_rate_base2006 = 89.5

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2014

Hardware Availability: Aug-2013

Software Availability: Oct-2013

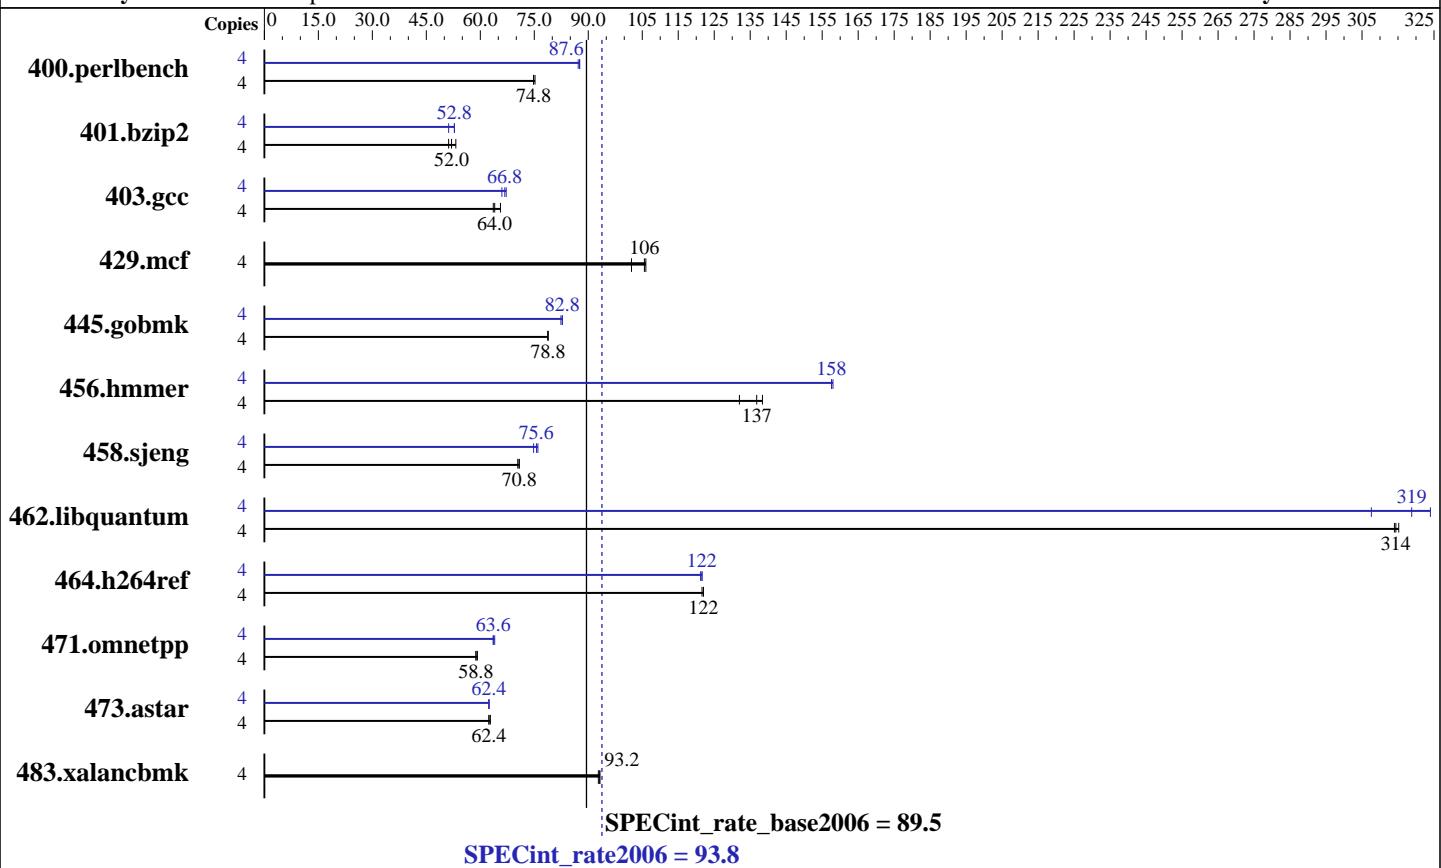

Software

Hardware		Software	
CPU Name:	AMD A10-6800K	Operating System:	Microsoft Windows 8.1 Pro
CPU Characteristics:	AMD Turbo CORE technology up to 4.40 GHz		6.3.9600 N/A Build 9600
CPU MHz:	4100	Compiler:	C/C++: Version 14.0.1.139 of Intel C++ Studio XE for Windows;
FPU:	Integrated		Libraries: Version 16.00.30319.01 of Microsoft Visual Studio 2010 Professional SP1
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip	Auto Parallel:	No
CPU(s) orderable:	1 chip	File System:	NTFS
Primary Cache:	128 KB I on chip per chip, 64 KB I shared / 2 cores; 16 KB D on chip per core	System State:	Default
Secondary Cache:	4 MB I+D on chip per chip, 2 MB shared / 2 cores	Base Pointers:	32-bit
L3 Cache:	None	Peak Pointers:	32/64-bit
Other Cache:	None	Other Software:	SmartHeap Library Version 10.0 from http://www.microquill.com/
Memory:	8 GB (2 x 4 GB 2Rx4 PC3-12800U-11)		
Disk Subsystem:	1 TB Seagate SATA HDD, 7200 RPM		
Other Hardware:	None		



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS F2A85-M PRO Motherboard (AMD A10-6800K APU
with Radeon HD Graphics)

SPECint_rate2006 = 93.8

SPECint_rate_base2006 = 89.5

CPU2006 license: 13

Test date: Jul-2014

Test sponsor: Intel Corporation

Hardware Availability: Aug-2013

Tested by: Intel Corporation

Software Availability: Oct-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	522	74.8	522	74.8	520	75.2	4	447	87.6	447	87.2	446	87.6
401.bzip2	4	728	53.2	743	52.0	751	51.2	4	732	52.8	730	52.8	754	51.2
403.gcc	4	506	63.6	492	65.6	503	64.0	4	482	66.8	479	67.2	489	66.0
429.mcf	4	358	102	344	106	345	106	4	358	102	344	106	345	106
445.gobmk	4	532	78.8	534	78.8	533	78.8	4	508	82.8	508	82.4	508	82.8
456.hmmer	4	269	138	282	132	273	137	4	237	158	236	158	237	158
458.sjeng	4	685	70.8	686	70.8	687	70.4	4	638	76.0	640	75.6	646	74.8
462.libquantum	4	264	314	263	315	264	314	4	256	324	270	308	260	319
464.h264ref	4	727	122	727	122	726	122	4	727	122	729	122	729	121
471.omnetpp	4	425	58.8	426	58.8	424	59.2	4	392	64.0	392	63.6	392	63.6
473.astar	4	449	62.4	448	62.8	450	62.4	4	450	62.4	450	62.4	450	62.4
483.xalancbmk	4	297	93.2	296	93.2	297	92.8	4	297	93.2	296	93.2	297	92.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

To compile these binaries, the Intel Compiler 14.0 was set up to generate 32-bit binaries with the command:

"ipsxe-comp-vars.bat ia32 vs2010" (shortcut provided in the Intel(r) Parallel Studio XE 2013 program folder)

Submit Notes

Processes were bound to specific processors using the start command with the /affinity switch. The config file option 'submit' was used to generate the affinity mask for each process.

Platform Notes

```
Sysinfo program C:\SPEC14.0\Docs\sysinfo
$Rev: 6775 $ $Date::: 2011-08-16 #\$ \8787f7622badcf24e01c368b1db4377c
running on Clt08606E747CCD Tue Jul 1 11:36:15 2014
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
Trying 'systeminfo'
OS Name      : Microsoft Windows 8.1 Pro
OS Version   : 6.3.9600 N/A Build 9600
System Manufacturer: System manufacturer
System Model  : System Product Name
Processor(s) : 1 Processor(s) Installed.
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS F2A85-M PRO Motherboard (AMD A10-6800K APU
with Radeon HD Graphics)

SPECint_rate2006 = 93.8

SPECint_rate_base2006 = 89.5

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2014

Hardware Availability: Aug-2013

Software Availability: Oct-2013

Platform Notes (Continued)

[01]: AMD64 Family 21 Model 19 Stepping 1 AuthenticAMD ~4100 Mhz
BIOS Version : American Megatrends Inc. 6303, 8/13/2013
Total Physical Memory: 7,366 MB

```
Trying 'wmic cpu get /value'  
DeviceID      : CPU0  
L2CacheSize   : 4096  
L3CacheSize   : 0  
MaxClockSpeed : 4100  
Name          : AMD A10-6800K APU with Radeon(tm) HD Graphics  
NumberOfCores  : 2  
NumberOfLogicalProcessors: 4
```

(End of data from sysinfo program)

Component Notes

Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply

General Notes

Binaries compiled on a system with 1x Intel Core i7-860 CPU
+ 8GB memory using Windows 7 Enterprise 64-bit

Base Compiler Invocation

C benchmarks:

```
    icl -Qvc10 -Qstd=c99
```

C++ benchmarks:

```
    icl -Qvc10
```

Base Portability Flags

```
403.gcc: -DSPEC_CPU_WIN32  
464.h264ref: -DWIN32 -DSPEC_CPU_NO_INTTYPES  
483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword
```

Base Optimization Flags

C benchmarks:

```
    /arch:AVX -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS F2A85-M PRO Motherboard (AMD A10-6800K APU
with Radeon HD Graphics)

SPECint_rate2006 = 93.8

SPECint_rate_base2006 = 89.5

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2014

Hardware Availability: Aug-2013

Software Availability: Oct-2013

Base Optimization Flags (Continued)

C++ benchmarks:

```
/arch:AVX -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features  
/F512000000 shlw32M.lib -link /FORCE:MULTIPLE
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icl -Qvc10 -Qstd=c99
```

```
456.hmmr: C:\Program Files (x86)\Intel\Composer XE 2013 SP1/bin/intel64/icl.exe
```

```
458.sjeng: C:\Program Files (x86)\Intel\Composer XE 2013 SP1/bin/intel64/icl.exe
```

```
462.libquantum: C:\Program Files (x86)\Intel\Composer XE 2013 SP1/bin/intel64/icl.exe  
-Qstd=c99
```

C++ benchmarks (except as noted below):

```
icl -Qvc10
```

```
473.astar: C:\Program Files (x86)\Intel\Composer XE 2013 SP1/bin/intel64/icl.exe
```

Peak Portability Flags

```
403.gcc: -DSPEC_CPU_WIN32
```

```
456.hmmr: -DSPEC_CPU_P64
```

```
458.sjeng: -DSPEC_CPU_P64
```

```
462.libquantum: -DSPEC_CPU_P64
```

```
464.h264ref: -DWIN32 -DSPEC_CPU_NO_INTTYPES
```

```
473.astar: -DSPEC_CPU_P64
```

```
483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword
```

Peak Optimization Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS F2A85-M PRO Motherboard (AMD A10-6800K APU
with Radeon HD Graphics)

SPECint_rate2006 = 93.8

SPECint_rate_base2006 = 89.5

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2014

Hardware Availability: Aug-2013

Software Availability: Oct-2013

Peak Optimization Flags (Continued)

400.perlbench: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
/F512000000 shlw32M.lib -link /FORCE:MULTIPLE

401.bzip2: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias
/F512000000

403.gcc: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

429.mcf: basepeak = yes

445.gobmk: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O2 -Qprec-div- -Qansi-alias /F512000000

456.hmmr: -Qauto-ilp32 /arch:AVX(pass 2) -Qprof_gen(pass 1)
-Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch
/F512000000

458.sjeng: -Qauto-ilp32 /arch:AVX(pass 2) -Qprof_gen(pass 1)
-Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll14
/F512000000

462.libquantum: -Qauto-ilp32 /arch:AVX -Qipo -O3 -Qprec-div-
-Qopt-prefetch /F512000000

464.h264ref: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll12 -Qansi-alias /F512000000

C++ benchmarks:

471.omnetpp: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias
-Qopt-ra-region-strategy=block /F512000000 shlw32M.lib
-link /FORCE:MULTIPLE

473.astar: -Qauto-ilp32 /arch:AVX -Qipo -O3 -Qprec-div-
-Qopt-prefetch /F512000000 shlw64M.lib
-link /FORCE:MULTIPLE

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS F2A85-M PRO Motherboard (AMD A10-6800K APU
with Radeon HD Graphics)

SPECint_rate2006 = 93.8

SPECint_rate_base2006 = 89.5

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2014

Hardware Availability: Aug-2013

Software Availability: Oct-2013

Peak Other Flags (Continued)

403.gcc: -Dalloca=_alloca

456.hmmer: -link -LIBPATH:C:\Program Files (x86)\Intel\Composer XE 2013 SP1/compiler/lib/intel64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

458.sjeng: -link -LIBPATH:C:\Program Files (x86)\Intel\Composer XE 2013 SP1/compiler/lib/intel64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

462.libquantum: -link -LIBPATH:C:\Program Files (x86)\Intel\Composer XE 2013 SP1/compiler/lib/intel64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

C++ benchmarks:

473.astar: -link -LIBPATH:C:\Program Files (x86)\Intel\Composer XE 2013 SP1/compiler/lib/intel64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Aug 12 15:10:51 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 29 July 2014.