



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp®2006 = 88.6

Huawei CH140 (Intel Xeon E5-2670)

SPECfp_base2006 = 85.5

CPU2006 license: 3175


Test date: Aug-2014

Test sponsor: Huawei

Hardware Availability: Feb-2012

Tested by: Huawei

Software Availability: Nov-2013

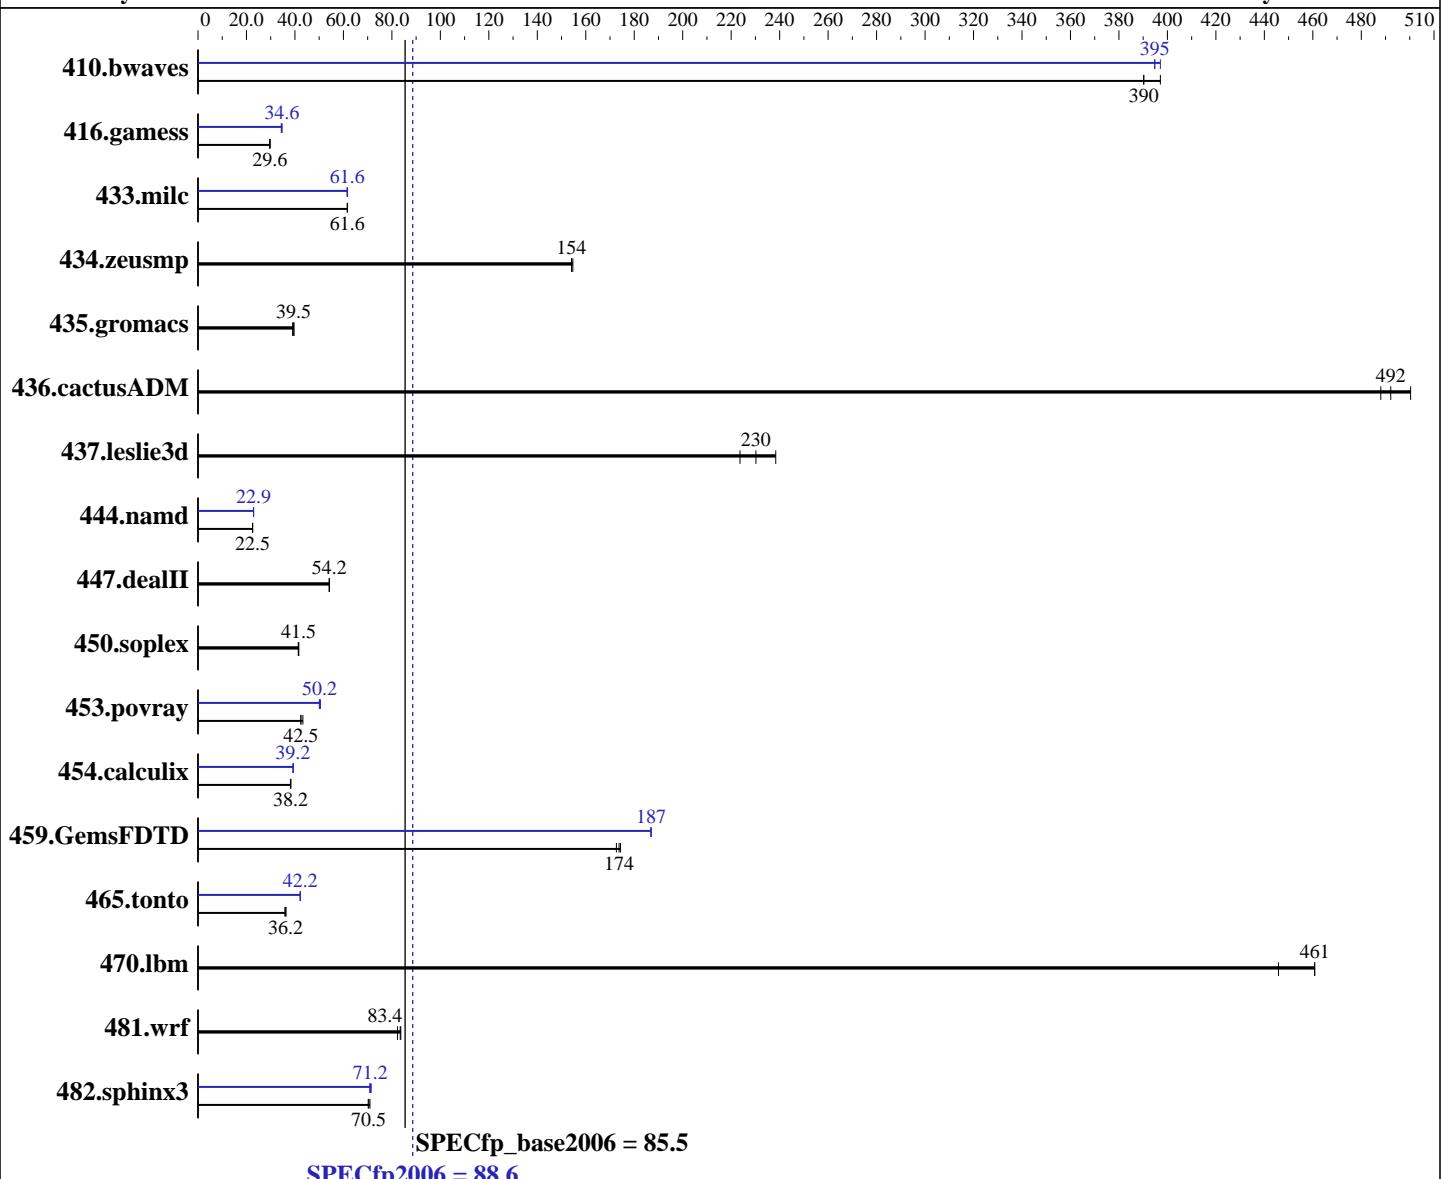

Hardware

CPU Name: Intel Xeon E5-2670
CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz
CPU MHz: 2600
FPU: Integrated
CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip
CPU(s) orderable: 1,2 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
Compiler: 2.6.32-431.el6.x86_64
C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;
Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
Auto Parallel: Yes
File System: ext3
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 88.6

Huawei CH140 (Intel Xeon E5-2670)

SPECfp_base2006 = 85.5

CPU2006 license: 3175

Test date: Aug-2014

Test sponsor: Huawei

Hardware Availability: Feb-2012

Tested by: Huawei

Software Availability: Nov-2013

L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (8 x 16 GB 2Rx4 PC3-14900R-13, ECC)
 Disk Subsystem: 1 X 500 GB SATA 7200 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	34.8	390	34.8	390	34.2	397	34.4	395	34.2	397	34.4	395
416.gamess	658	29.8	663	29.5	661	29.6	565	34.6	566	34.6	570	34.3
433.milc	149	61.7	149	61.6	149	61.6	149	61.6	149	61.6	149	61.6
434.zeusmp	59.0	154	58.8	155	59.0	154	59.0	154	58.8	155	59.0	154
435.gromacs	180	39.6	183	39.0	181	39.5	180	39.6	183	39.0	181	39.5
436.cactusADM	24.5	488	23.9	500	24.3	492	24.5	488	23.9	500	24.3	492
437.leslie3d	40.8	230	42.0	224	39.4	238	40.8	230	42.0	224	39.4	238
444.namd	356	22.5	356	22.5	356	22.5	350	22.9	350	22.9	350	22.9
447.dealII	211	54.2	211	54.2	211	54.2	211	54.2	211	54.2	211	54.2
450.soplex	201	41.5	201	41.6	202	41.4	201	41.5	201	41.6	202	41.4
453.povray	125	42.5	123	43.3	125	42.4	106	50.2	105	50.5	106	50.1
454.calculix	215	38.3	216	38.2	216	38.1	210	39.4	210	39.2	211	39.2
459.GemsFDTD	61.5	173	61.1	174	60.9	174	56.8	187	56.8	187	56.7	187
465.tonto	272	36.2	275	35.8	271	36.3	233	42.2	233	42.2	233	42.2
470.lbm	30.8	446	29.8	461	29.8	461	30.8	446	29.8	461	29.8	461
481.wrf	134	83.4	133	83.7	136	82.3	134	83.4	133	83.7	136	82.3
482.sphinx3	277	70.5	278	70.2	275	70.9	274	71.2	273	71.5	275	70.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

```
Sysinfo program /spec/config/sysinfo.rev6800
$Rev: 6800 $ $Date::: 2011-10-11 #$
running on localhost Tue Aug  5 12:06:37 2014
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2670 0 @ 2.60GHz
Continued on next page
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 88.6

Huawei CH140 (Intel Xeon E5-2670)

SPECfp_base2006 = 85.5

CPU2006 license: 3175

Test date: Aug-2014

Test sponsor: Huawei

Hardware Availability: Feb-2012

Tested by: Huawei

Software Availability: Nov-2013

Platform Notes (Continued)

```
2 "physical id"s (chips)
 16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings   : 8
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB

From /proc/meminfo
MemTotal:      132114848 kB
HugePages_Total:       0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
 Red Hat Enterprise Linux Server release 6.5 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux localhost 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Aug 5 06:02

SPEC is set to: /spec
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext3  455G  342G   91G  80%  /


Additional information from dmidecode:
Memory:
 8x Samsung M393B2G70BH0-CMA 16 GB 1866 MHz 2 rank

(End of data from sysinfo program)
```

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,0,1"

LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64"

OMP_NUM_THREADS = "16"

Binaries compiled on a system with 2 x Xeon X5645 CPU + 16GB memory
using RHEL 6.1

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 88.6

Huawei CH140 (Intel Xeon E5-2670)

SPECfp_base2006 = 85.5

CPU2006 license: 3175

Test date: Aug-2014

Test sponsor: Huawei

Hardware Availability: Feb-2012

Tested by: Huawei

Software Availability: Nov-2013

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 88.6

Huawei CH140 (Intel Xeon E5-2670)

SPECfp_base2006 = 85.5

CPU2006 license: 3175

Test date: Aug-2014

Test sponsor: Huawei

Hardware Availability: Feb-2012

Tested by: Huawei

Software Availability: Nov-2013

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll12 -ansi-alias
-parallel

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel
-static

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 88.6

Huawei CH140 (Intel Xeon E5-2670)

SPECfp_base2006 = 85.5

CPU2006 license: 3175

Test date: Aug-2014

Test sponsor: Huawei

Hardware Availability: Feb-2012

Tested by: Huawei

Software Availability: Nov-2013

Peak Optimization Flags (Continued)

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Aug 26 18:10:53 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 August 2014.