



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

IBM System x iDataPlex dx360 M4
(Intel Xeon E5-2640 v2, 2.00 GHz)

SPECfp®2006 = 78.4

SPECfp_base2006 = 75.6

CPU2006 license: 9017


Test date: Oct-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

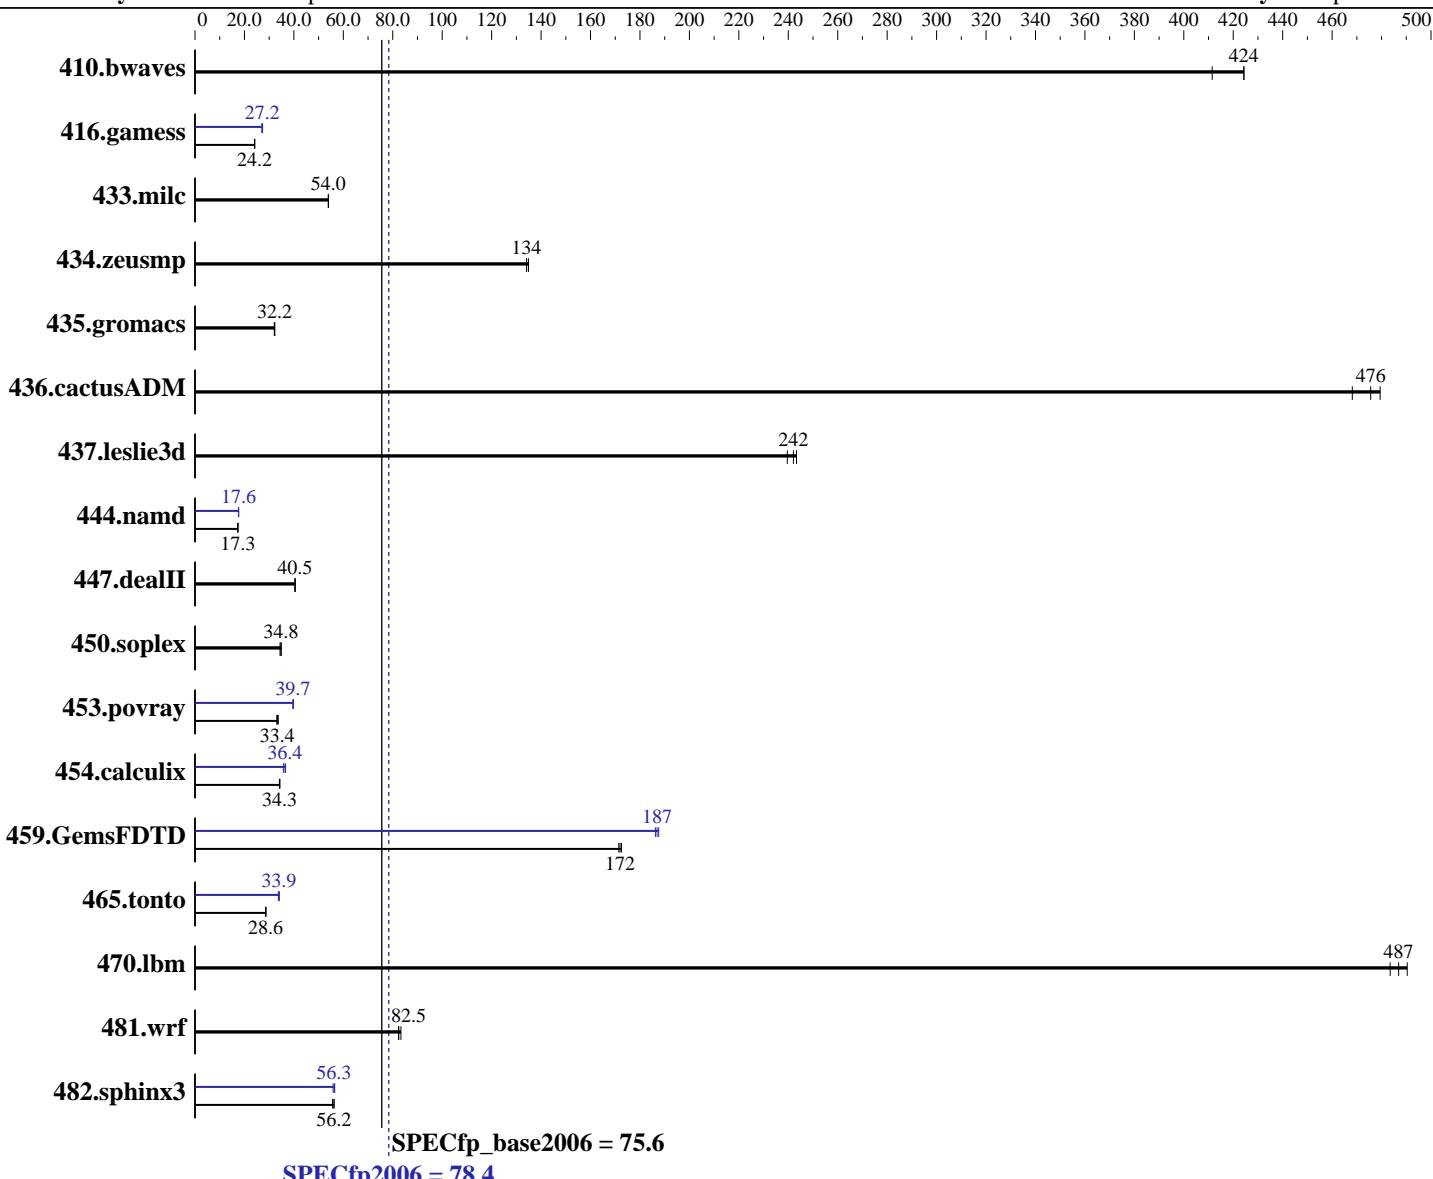

Hardware

CPU Name: Intel Xeon E5-2640 v2
CPU Characteristics: Intel Turbo Boost Technology up to 2.50 GHz
CPU MHz: 2000
FPU: Integrated
CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
Compiler: 2.6.32-358.el6.x86_64
C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
Auto Parallel: Yes
File System: ext4

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

IBM System x iDataPlex dx360 M4
(Intel Xeon E5-2640 v2, 2.00 GHz)

SPECfp2006 = 78.4

SPECfp_base2006 = 75.6

CPU2006 license: 9017

Test date: Oct-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

L3 Cache: 20 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC, running at 1600 MHz)
Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	33.0	411	32.0	424	<u>32.0</u>	<u>424</u>	33.0	411	32.0	424	<u>32.0</u>	<u>424</u>
416.gamess	810	24.2	<u>811</u>	<u>24.2</u>	814	24.1	<u>716</u>	<u>27.4</u>	724	<u>27.1</u>	<u>720</u>	<u>27.2</u>
433.milc	170	53.9	<u>170</u>	<u>54.0</u>	170	54.0	<u>170</u>	<u>53.9</u>	<u>170</u>	<u>54.0</u>	170	54.0
434.zeusmp	67.4	135	<u>67.8</u>	<u>134</u>	67.8	134	67.4	135	<u>67.8</u>	<u>134</u>	67.8	134
435.gromacs	<u>222</u>	<u>32.2</u>	223	32.1	221	32.3	<u>222</u>	<u>32.2</u>	223	32.1	221	32.3
436.cactusADM	<u>25.1</u>	<u>476</u>	25.5	468	24.9	479	<u>25.1</u>	<u>476</u>	25.5	468	24.9	479
437.leslie3d	38.6	243	<u>38.8</u>	<u>242</u>	39.2	240	<u>38.6</u>	<u>243</u>	<u>38.8</u>	<u>242</u>	39.2	240
444.namd	<u>463</u>	<u>17.3</u>	463	17.3	462	17.3	<u>453</u>	<u>17.7</u>	<u>456</u>	<u>17.6</u>	456	17.6
447.dealII	<u>283</u>	<u>40.5</u>	283	40.5	283	40.5	<u>283</u>	<u>40.5</u>	283	40.5	283	40.5
450.soplex	242	34.4	<u>240</u>	<u>34.8</u>	239	34.9	<u>242</u>	<u>34.4</u>	<u>240</u>	<u>34.8</u>	239	34.9
453.povray	<u>159</u>	<u>33.4</u>	161	33.1	158	33.7	<u>134</u>	<u>39.8</u>	134	39.6	<u>134</u>	<u>39.7</u>
454.calculix	242	34.2	240	34.3	<u>241</u>	<u>34.3</u>	231	35.8	<u>227</u>	<u>36.4</u>	225	36.6
459.GemsFDTD	61.9	171	61.5	173	<u>61.7</u>	<u>172</u>	<u>56.8</u>	<u>187</u>	56.6	188	57.0	186
465.tonto	342	28.8	<u>345</u>	<u>28.6</u>	345	28.5	<u>289</u>	<u>34.1</u>	292	33.7	<u>290</u>	<u>33.9</u>
470.lbm	28.4	483	28.0	490	<u>28.2</u>	<u>487</u>	28.4	483	28.0	490	<u>28.2</u>	<u>487</u>
481.wrf	<u>135</u>	<u>82.5</u>	136	82.3	134	83.3	<u>135</u>	<u>82.5</u>	136	82.3	134	83.3
482.sphinx3	347	56.2	350	55.6	<u>347</u>	<u>56.2</u>	<u>346</u>	<u>56.3</u>	345	56.5	349	55.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Zone reclaim mode enabled with:

```
echo 1 > /proc/sys/vm/zone_reclaim_mode
```

Intel Idle Driver disabled with the following Linux kernel parameter in /etc/grub.conf:
intel_idle.max_cstate=0

Platform Notes

BIOS setting:

Operating Mode set to Maximum Performance

Sysinfo program /home/SPECcpu-20140116-ic14.0/config/sysinfo.rev6874

\$Rev: 6874 \$ \$Date::: 2013-11-20 ## 654bd3fcf53b06faef0efe54ed011998

running on dx360M4 Fri Oct 10 15:02:36 2014

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

IBM System x iDataPlex dx360 M4
(Intel Xeon E5-2640 v2, 2.00 GHz)

SPECfp2006 = 78.4

SPECfp_base2006 = 75.6

CPU2006 license: 9017

Test date: Oct-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2640 v2 @ 2.00GHz
        2 "physical id"s (chips)
        32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 8
    siblings : 16
    physical 0: cores 0 1 2 3 4 5 6 7
    physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      264641468 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux dx360M4 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Oct 8 18:10
```

```
SPEC is set to: /home/SPECcpu-20140116-ic14.0
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/vg_td2-lv_home
                ext4   380G  175G  186G  49%  /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS IBM -[TDE139OUS-1.50]- 02/21/2014

Memory:
16x Samsung M393B2G70QH0-CMA 16 GB 2 rank 1866 MHz, configured at 1600 MHz

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

IBM System x iDataPlex dx360 M4
(Intel Xeon E5-2640 v2, 2.00 GHz)

SPECfp2006 = 78.4

SPECfp_base2006 = 75.6

CPU2006 license: 9017

Test date: Oct-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

Platform Notes (Continued)

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/home/SPECcpu-20140116-ic14.0/libs/32:/home/SPECcpu-20140116-ic14.0/libs/64:/home/SPECcpu-20140116-ic14.0/sh"

OMP_NUM_THREADS = "16"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

 icc -m64

C++ benchmarks:

 icpc -m64

Fortran benchmarks:

 ifort -m64

Benchmarks using both Fortran and C:

 icc -m64 ifort -m64

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

IBM System x iDataPlex dx360 M4
(Intel Xeon E5-2640 v2, 2.00 GHz)

SPECfp2006 = 78.4

SPECfp_base2006 = 75.6

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: IBM Corporation

Test date: Oct-2014

Hardware Availability: Dec-2013

Software Availability: Sep-2013

Base Portability Flags (Continued)

470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

IBM System x iDataPlex dx360 M4
(Intel Xeon E5-2640 v2, 2.00 GHz)

SPECfp2006 = 78.4

SPECfp_base2006 = 75.6

CPU2006 license: 9017

Test date: Oct-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll12 -ansi-alias
-parallel

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll12
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll12
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll14

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

IBM System x iDataPlex dx360 M4
(Intel Xeon E5-2640 v2, 2.00 GHz)

SPECfp2006 = 78.4

SPECfp_base2006 = 75.6

CPU2006 license: 9017

Test date: Oct-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-C.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-C.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Nov 5 10:23:09 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 4 November 2014.