SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

Huawei RH2288A V2 (Intel Xeon E5-2650L v2)

SPECfp®2006 = 68.9

SPECfp_base2006 = 66.4

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Sep-2014
Hardware Availability: Sep-2013
Software Availability: Nov-2013

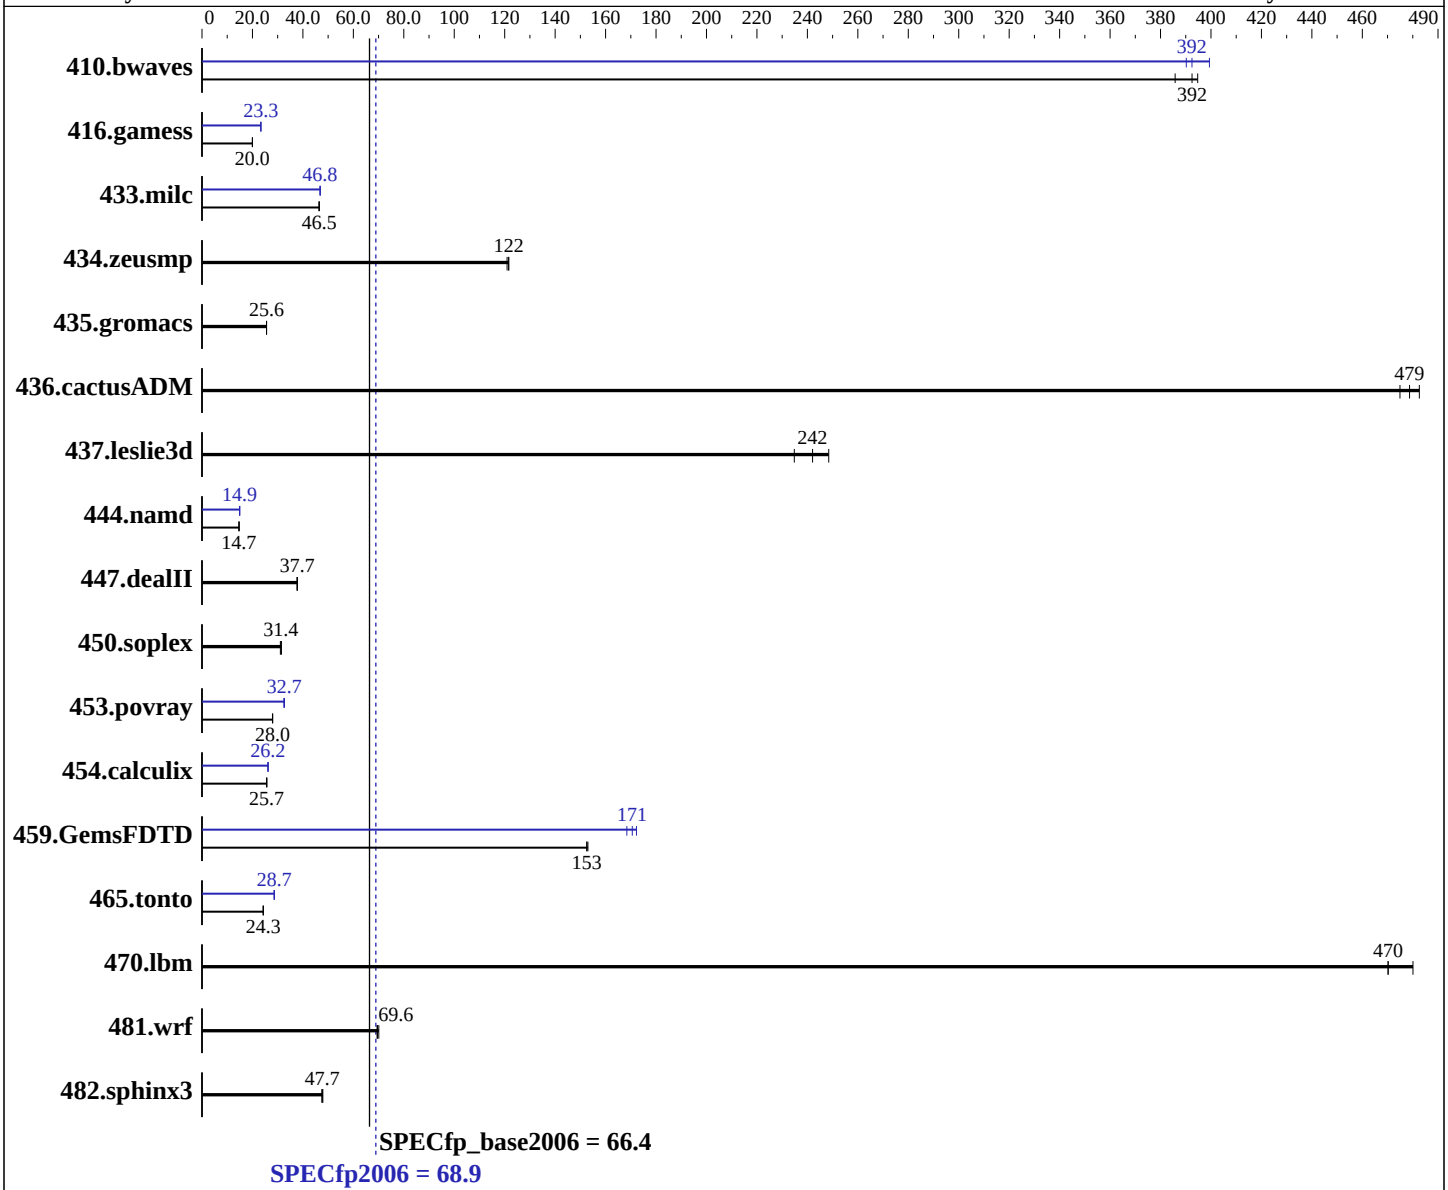

Hardware

CPU Name:	Intel Xeon E5-2650L v2
CPU Characteristics:	Intel Turbo Boost Technology up to 2.10 GHz
CPU MHz:	1700
FPU:	Integrated
CPU(s) enabled:	20 cores, 2 chips, 10 cores/chip
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.5 (Santiago) 2.6.32-431.el6.x86_64
Compiler:	C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux; Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
Auto Parallel:	Yes
File System:	ext4

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

Huawei RH2288A V2 (Intel Xeon E5-2650L v2)

SPECfp2006 = 68.9

SPECfp_base2006 = 66.4

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Sep-2014
Hardware Availability: Sep-2013
Software Availability: Nov-2013

L3 Cache: 25 MB I+D on chip per chip
Other Cache: None
Memory: 64 GB (8 x 8 GB 2Rx4 PC3-14900R-11, ECC, running at 1600 MHz)
Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	**34.6**	**392**	35.2	386	34.4	395	34.8	390	34.0	399	**34.6**	**392**
416.gamess	**980**	**20.0**	980	20.0	979	20.0	**839**	**23.3**	840	23.3	839	23.3
433.milc	**198**	**46.5**	198	46.5	198	46.4	**196**	**46.8**	196	46.8	196	46.8
434.zeusmp	**74.8**	**122**	74.8	122	75.2	121	**74.8**	**122**	74.8	122	75.2	121
435.gromacs	279	25.6	279	25.6	**279**	**25.6**	279	25.6	279	25.6	**279**	**25.6**
436.cactusADM	25.2	475	24.8	483	**25.0**	**479**	25.2	475	24.8	483	**25.0**	**479**
437.leslie3d	**38.8**	**242**	40.0	235	37.8	248	**38.8**	**242**	40.0	235	37.8	248
444.namd	546	14.7	546	14.7	**546**	**14.7**	537	14.9	537	14.9	**537**	**14.9**
447.dealII	303	37.7	**303**	**37.7**	303	37.8	303	37.7	**303**	**37.7**	303	37.8
450.soplex	265	31.5	268	31.1	**266**	**31.4**	265	31.5	268	31.1	**266**	**31.4**
453.povray	190	27.9	190	28.0	**190**	**28.0**	163	32.7	164	32.4	**163**	**32.7**
454.calculix	321	25.7	**322**	**25.7**	322	25.6	315	26.2	315	26.2	**315**	**26.2**
459.GemsFDTD	69.6	153	69.3	153	**69.5**	**153**	**62.2**	**171**	63.0	168	61.6	172
465.tonto	404	24.3	**405**	**24.3**	406	24.2	343	28.7	**343**	**28.7**	344	28.6
470.lbm	**29.2**	**470**	28.6	480	29.2	470	**29.2**	**470**	28.6	480	29.2	470
481.wrf	161	69.4	**161**	**69.6**	159	70.1	161	69.4	**161**	**69.6**	159	70.1
482.sphinx3	410	47.5	**409**	**47.7**	407	47.9	410	47.5	**409**	**47.7**	407	47.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS configuration:
Set Power Efficiency Mode to Custom
Baseboard Management Controller used to adjust the fan speed to 100%
Sysinfo program /spec/config/sysinfo.rev6800
$Rev: 6800 $ $Date:: 2011-10-11 #$ 6f2ebdff5032aaa42e583f96b07f99d3
running on RH2288A Sat Sep 20 03:08:57 2014

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
```

Continued on next page

Platform Notes (Continued)

```
      http://www.spec.org/cpu2006/Docs/config.html#sysinfo

    From /proc/cpuinfo
       model name : Intel(R) Xeon(R) CPU E5-2650L v2 @ 1.70GHz
          2 "physical id"s (chips)
          20 "processors"
       cores, siblings (Caution: counting these is hw and system dependent.  The
       following excerpts from /proc/cpuinfo might not be reliable.  Use with
       caution.)
          cpu cores : 10
          siblings  : 10
          physical 0: cores 0 1 2 3 4 8 9 10 11 12
          physical 1: cores 0 1 2 3 4 8 9 10 11 12
       cache size : 25600 KB

    From /proc/meminfo
       MemTotal:       66118696 kB
       HugePages_Total:       0
       Hugepagesize:       2048 kB

    /usr/bin/lsb_release -d
       Red Hat Enterprise Linux Server release 6.5 (Santiago)

    From /etc/*release* /etc/*version*
       redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
       system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
       system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

    uname -a:
       Linux RH2288A 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013
       x86_64 x86_64 x86_64 GNU/Linux

    run-level 3 Sep 19 18:15

    SPEC is set to: /spec
       Filesystem     Type  Size  Used Avail Use% Mounted on
       /dev/sda2      ext4  272G   96G  163G  37% /

    Additional information from dmidecode:
      Memory:
       8x Hynix HMT41GR7AFR8C-RD 8 GB 1867 MHz 2 rank

    (End of data from sysinfo program)
    Dmidecode mistakenly believes the memory was running at 1866 MHz, when it should only run at 1600 MHz
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,0,1"
LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64"
OMP_NUM_THREADS = "20"
```

Continued on next page

General Notes (Continued)

```
Binaries compiled on a system with 2x Xeon X5645 CPU + 16GB memory
using RHEL 6.1
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
The Huawei RH2288A V2 and Huawei RH1288A V2
are electronically equivalent.
The results have been measured on a Huawei RH2288A V2 model
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch -ansi-alias`

C++ benchmarks:
`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias`

Fortran benchmarks:
`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Benchmarks using both Fortran and C:
`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch -ansi-alias`

Peak Compiler Invocation

C benchmarks:
`icc -m64`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: `-xAVX`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-static -auto-ilp32 -ansi-alias`

470.lbm: `basepeak = yes`

482.sphinx3: `basepeak = yes`

Continued on next page

Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html
http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml
http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jan 6 12:47:34 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 6 January 2015.