SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A10 PRO-7850B with Radeon R7 Graphics)

SPECfp®2006 = 27.0

SPECfp_base2006 = 26.1

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Nov-2014
Hardware Availability: Jul-2014
Software Availability: Oct-2013

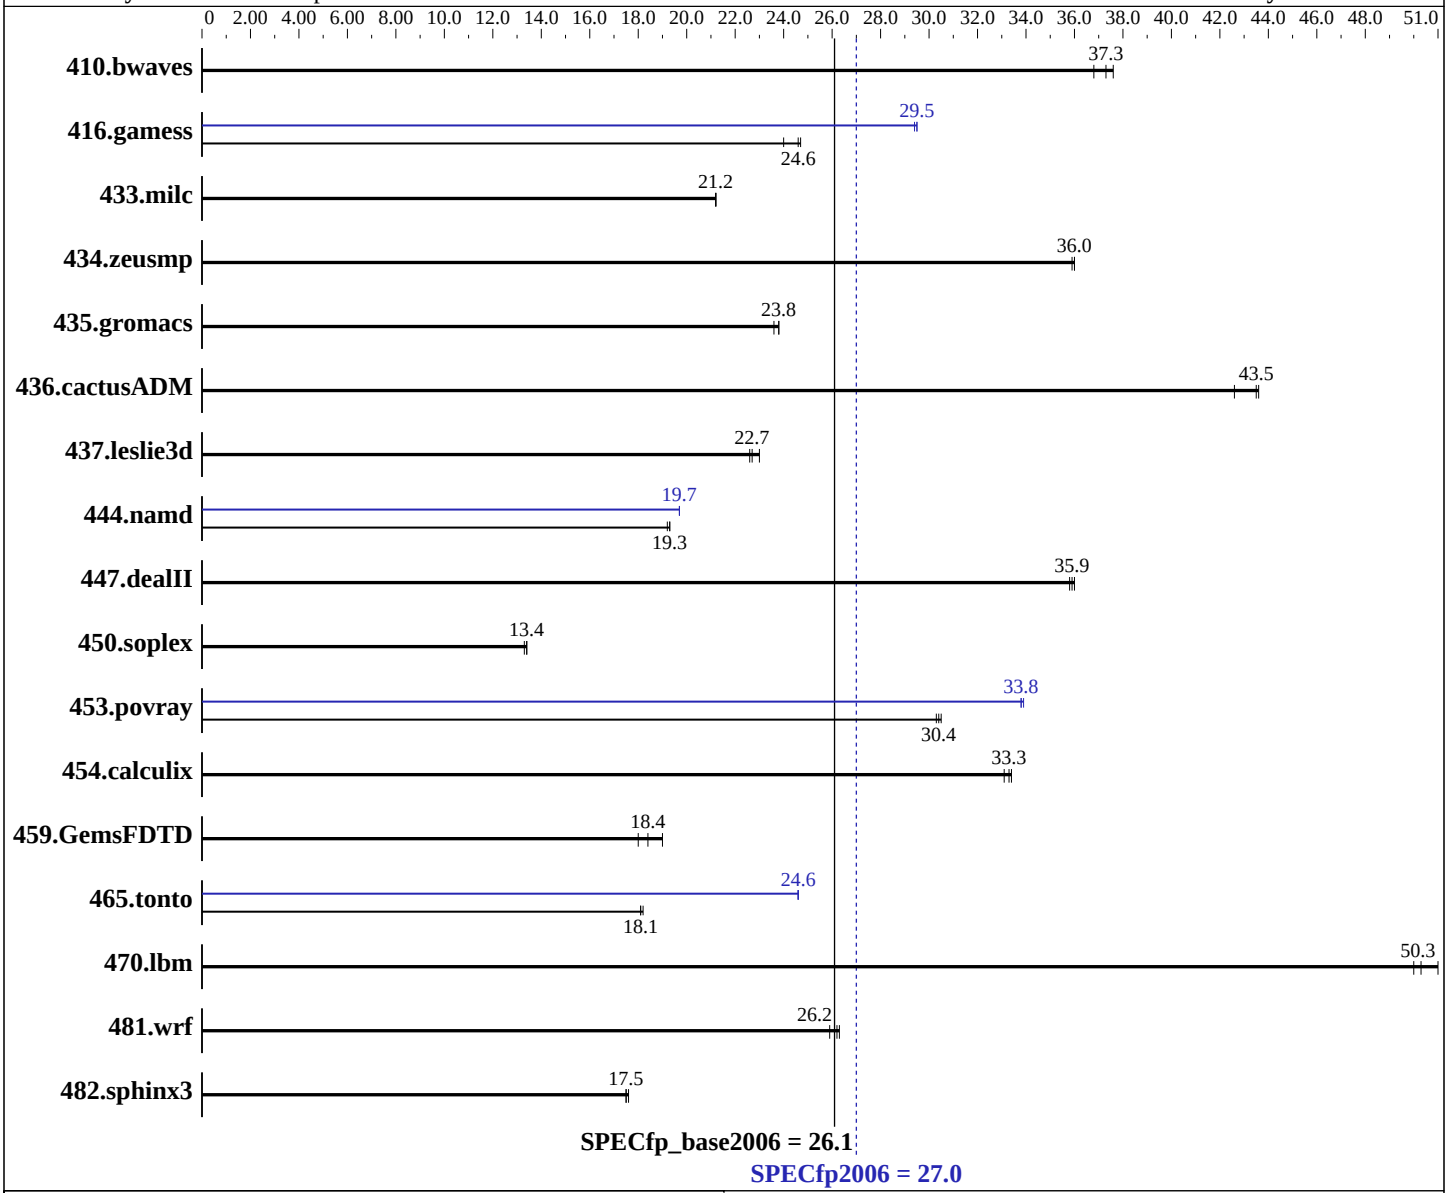

Hardware

CPU Name:	AMD A10 PRO-7850B
CPU Characteristics:	AMD Turbo CORE technology up to 4.00 GHz
CPU MHz:	3700
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	192 KB I on chip per chip, 96 KB I shared / 2 cores; 16 KB D on chip per core
Secondary Cache:	4 MB I+D on chip per chip, 2 MB shared / 2 cores

Continued on next page

Software

Operating System:	Microsoft Windows 8.1 Pro 6.3.9600 N/A Build 9600
Compiler:	C/C++: Version 14.0.1.139 of Intel C++ Studio XE for Windows; Fortran: Version 14.0.1.139 of Intel Fortran Studio XE for Windows; Libraries: Version 16.00.30319.01 of Microsoft Visual Studio 2010 Professional SP1
Auto Parallel:	Yes

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A10 PRO-7850B with Radeon R7 Graphics)

SPECfp2006 = 27.0

SPECfp_base2006 = 26.1

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Nov-2014
Hardware Availability: Jul-2014
Software Availability: Oct-2013

L3 Cache:	None	File System:	NTFS
Other Cache:	None	System State:	Default
Memory:	8 GB (2 x 4 GB 2Rx4 PC3-17000U-14)	Base Pointers:	32/64-bit
Disk Subsystem:	160 GB Western Digital SATA HDD, 7200 RPM	Peak Pointers:	32/64-bit
Other Hardware:	None	Other Software:	Microquill SmartHeap V10.0

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	362	37.6	369	36.8	**365**	**37.3**	362	37.6	369	36.8	**365**	**37.3**
416.gamess	816	24.0	792	24.7	**796**	**24.6**	663	29.5	667	29.4	**663**	**29.5**
433.milc	433	21.2	**433**	**21.2**	434	21.2	433	21.2	**433**	**21.2**	434	21.2
434.zeusmp	**253**	**36.0**	253	36.0	253	35.9	**253**	**36.0**	253	36.0	253	35.9
435.gromacs	302	23.6	300	23.8	**301**	**23.8**	302	23.6	300	23.8	**301**	**23.8**
436.cactusADM	281	42.6	274	43.6	**275**	**43.5**	281	42.6	274	43.6	**275**	**43.5**
437.leslie3d	**414**	**22.7**	409	23.0	417	22.6	**414**	**22.7**	409	23.0	417	22.6
444.namd	**417**	**19.3**	416	19.3	417	19.2	**407**	**19.7**	407	19.7	408	19.7
447.dealII	320	35.8	**319**	**35.9**	318	36.0	320	35.8	**319**	**35.9**	318	36.0
450.soplex	**624**	**13.4**	626	13.3	622	13.4	**624**	**13.4**	626	13.3	622	13.4
453.povray	**175**	**30.4**	175	30.5	175	30.3	**157**	**33.8**	157	33.8	157	33.9
454.calculix	247	33.4	**247**	**33.3**	250	33.1	247	33.4	**247**	**33.3**	250	33.1
459.GemsFDTD	**575**	**18.4**	590	18.0	560	19.0	**575**	**18.4**	590	18.0	560	19.0
465.tonto	539	18.2	543	18.1	**543**	**18.1**	**401**	**24.6**	401	24.6	400	24.6
470.lbm	**273**	**50.3**	275	50.0	270	51.0	**273**	**50.3**	275	50.0	270	51.0
481.wrf	**426**	**26.2**	431	25.9	424	26.3	**426**	**26.2**	431	25.9	424	26.3
482.sphinx3	1108	17.6	**1111**	**17.5**	1113	17.5	1108	17.6	**1111**	**17.5**	1113	17.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

```
To compile these binaries, the Intel Compiler 14.0 was set up to
generate 64-bit binaries with the command:
"ipsxe-comp-vars.bat intel64 vs2010" (shortcut provided in the Intel(r)
Parallel Studio XE 2013 program folder)
```

Platform Notes

```
Sysinfo program C:\SPEC14.0/Docs/sysinfo
$Rev: 6775 $ $Date:: 2011-08-16 #$ \8787f7622badcf24e01c368b1db4377c
running on CltE03F49B01E0D Thu Nov  6 07:50:50 2014

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo
```

Continued on next page

Platform Notes (Continued)

```
Trying 'systeminfo'
OS Name       : Microsoft Windows 8.1 Pro
OS Version    : 6.3.9600 N/A Build 9600
System Manufacturer: System manufacturer
System Model  : System Product Name
Processor(s)  : 1 Processor(s) Installed.
     [01]: AMD64 Family 21 Model 48 Stepping 1 AuthenticAMD ~3700 Mhz
BIOS Version  : American Megatrends Inc. 1301, 6/24/2014
Total Physical Memory: 7,105 MB

Trying 'wmic cpu get /value'
DeviceID      : CPU0
L2CacheSize   : 25359
L3CacheSize   : 0
MaxClockSpeed : 3700
Name          : AMD A10 PRO-7850B R7, 12 Compute Cores 4C+8G
NumberOfCores : 2
NumberOfLogicalProcessors: 4

(End of data from sysinfo program)
```

Component Notes

```
Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply
```

General Notes

```
OMP_NUM_THREADS set to number of processors cores
KMP_AFFINITY set to granularity=fine,scatter
Binaries compiled on a system with 1x Intel Core i7-860 CPU
+ 8GB memory using Windows 7 Enterprise 64-bit
```

Base Compiler Invocation

C benchmarks:
```
icl -Qvc10 -Qstd=c99
```

C++ benchmarks:
```
icl -Qvc10
```

Fortran benchmarks:
```
ifort
```

Benchmarks using both Fortran and C:
```
icl -Qvc10 -Qstd=c99 ifort
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_P64
416.gamess: -DSPEC_CPU_P64
433.milc: -DSPEC_CPU_P64
434.zeusmp: -DSPEC_CPU_P64
435.gromacs: -DSPEC_CPU_P64
436.cactusADM: -DSPEC_CPU_P64 -names:lowercase /assume:underscore
437.leslie3d: -DSPEC_CPU_P64
444.namd: -DSPEC_CPU_P64 /TP
447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
-Qoption,cpp,--ms_incompat_treatment_of_commas_in_macros
450.soplex: -DSPEC_CPU_P64
453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_NEED_INVHYP -DNEED_INVHYP
454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER -names:lowercase
459.GemsFDTD: -DSPEC_CPU_P64
465.tonto: -DSPEC_CPU_P64
470.lbm: -DSPEC_CPU_P64
481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
482.sphinx3: -DSPEC_CPU_P64

Base Optimization Flags

C benchmarks:
/arch:AVX -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias
-Qopt-prefetch -Qauto-ilp32 /F1000000000

C++ benchmarks:
/arch:AVX -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias
-Qopt-prefetch -Qcxx-features -Qauto-ilp32 /F1000000000 shlW64M.lib
-link /FORCE:MULTIPLE

Fortran benchmarks:
/arch:AVX -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias
-Qopt-prefetch /F1000000000

Benchmarks using both Fortran and C:
/arch:AVX -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias
-Qopt-prefetch -Qauto-ilp32 /F1000000000

Peak Compiler Invocation

C benchmarks:
icl -Qvc10 -Qstd=c99

C++ benchmarks:
icl -Qvc10

Continued on next page

Peak Compiler Invocation (Continued)

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icl -Qvc10 -Qstd=c99 ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4 -Qansi-alias -Qauto-ilp32 /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Ob0 -Qansi-alias -Qscalar-rep- /F1000000000

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

459.GemsFDTD: basepeak = yes

465.tonto: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4 -Qauto -Qinline-calloc /F1000000000

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jan 27 13:34:47 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 27 January 2015.