SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

Motherboard X10SLM+-F
(Intel Xeon E3-1231 v3)

SPECfp®2006 = 76.1

SPECfp_base2006 = 74.2

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Jan-2015
Hardware Availability: May-2014
Software Availability: Sep-2014

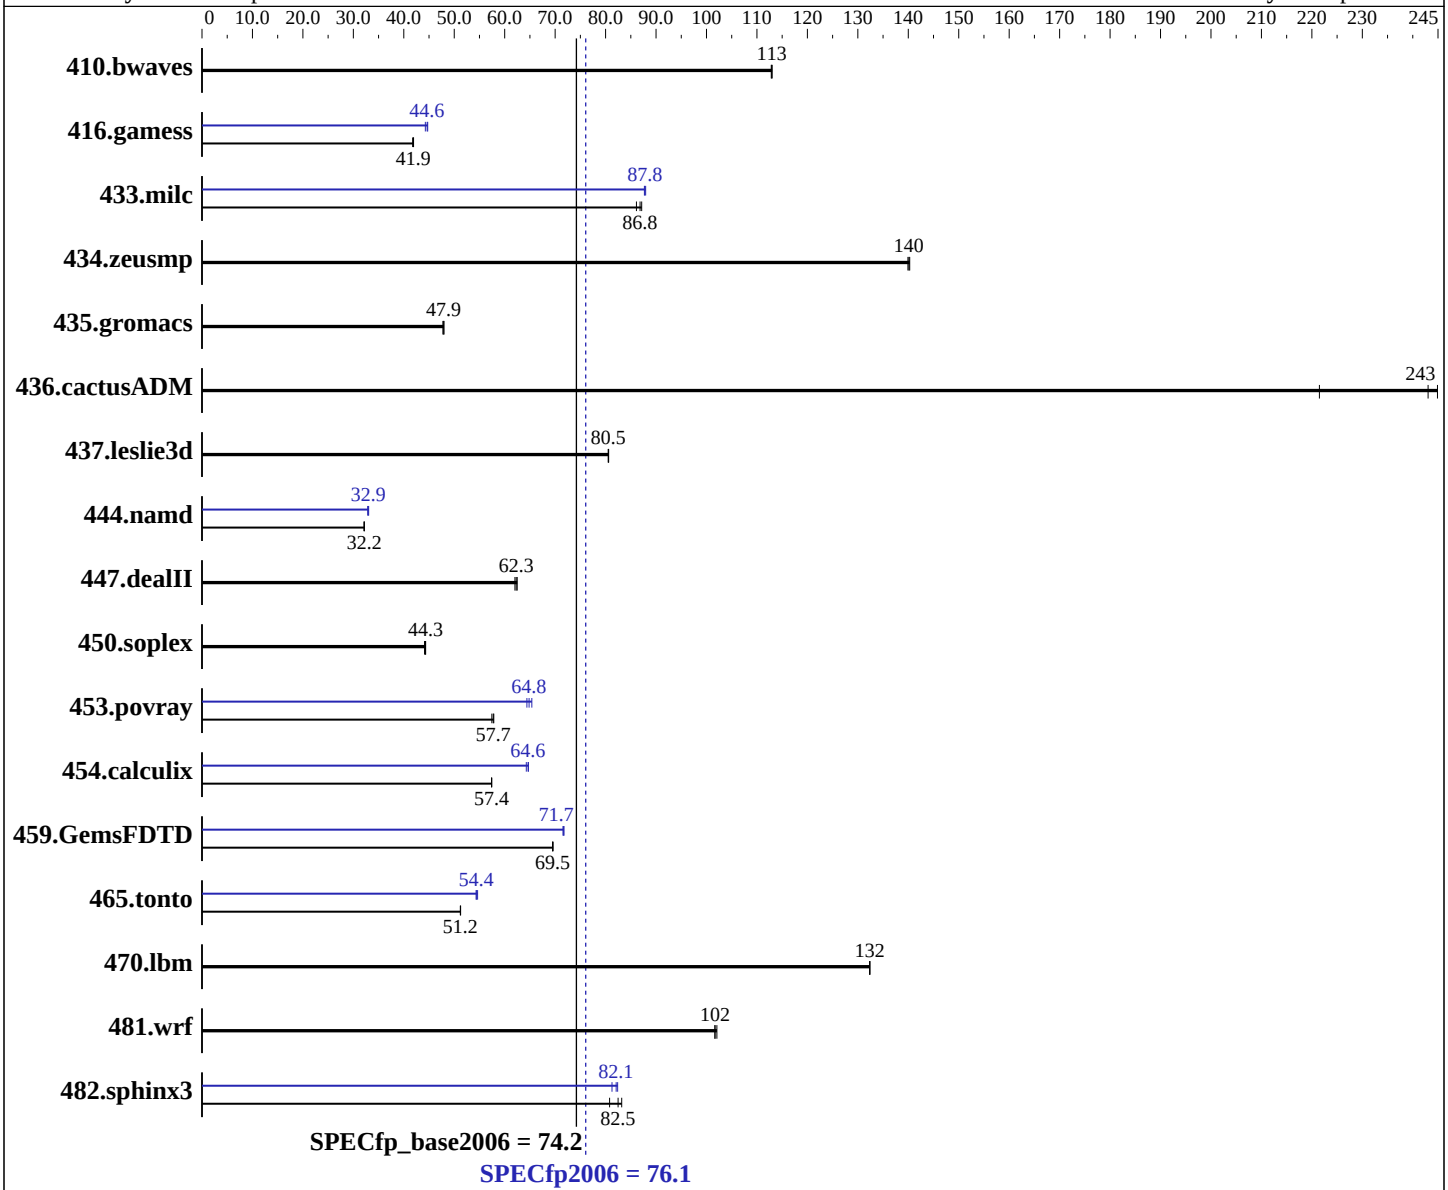

Hardware

CPU Name:	Intel Xeon E3-1231 v3
CPU Characteristics:	Intel Turbo Boost Technology up to 3.80 GHz
CPU MHz:	3400
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 7.0, Kernel 3.10.0-123.el7.x86_64
Compiler:	C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux; Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
Auto Parallel:	Yes
File System:	xfs
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

Motherboard X10SLM+-F
(Intel Xeon E3-1231 v3)

SPECfp2006 = 76.1

SPECfp_base2006 = 74.2

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Jan-2015
Hardware Availability: May-2014
Software Availability: Sep-2014

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 32 GB (4 x 8 GB 2Rx8 PC3-14900E-13, ECC, running at 1600 MHz)
Disk Subsystem: 1 x 512 GB SATA III, SSD
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	120	113	**120**	**113**	120	113	120	113	**120**	**113**	120	113
416.gamess	**467**	**41.9**	469	41.8	467	41.9	438	44.7	442	44.3	**439**	**44.6**
433.milc	**106**	**86.8**	107	86.1	105	87.2	105	87.7	**105**	**87.8**	104	87.9
434.zeusmp	65.0	140	**64.9**	**140**	64.9	140	65.0	140	**64.9**	**140**	64.9	140
435.gromacs	149	48.0	150	47.7	**149**	**47.9**	149	48.0	150	47.7	**149**	**47.9**
436.cactusADM	48.8	245	**49.2**	**243**	54.0	221	48.8	245	**49.2**	**243**	54.0	221
437.leslie3d	117	80.5	117	80.6	**117**	**80.5**	117	80.5	117	80.6	**117**	**80.5**
444.namd	249	32.1	249	32.2	**249**	**32.2**	244	32.8	243	33.0	**243**	**32.9**
447.dealII	**184**	**62.3**	184	62.0	183	62.5	**184**	**62.3**	184	62.0	183	62.5
450.soplex	**188**	**44.3**	188	44.3	189	44.1	**188**	**44.3**	188	44.3	189	44.1
453.povray	**92.1**	**57.7**	92.6	57.5	92.0	57.8	**82.1**	**64.8**	81.4	65.4	82.6	64.4
454.calculix	**144**	**57.4**	144	57.4	144	57.4	128	64.3	**128**	**64.6**	128	64.7
459.GemsFDTD	**153**	**69.5**	152	69.6	153	69.5	148	71.6	**148**	**71.7**	148	71.8
465.tonto	**192**	**51.2**	192	51.2	192	51.3	**181**	**54.4**	180	54.6	181	54.4
470.lbm	**104**	**132**	104	132	104	132	**104**	**132**	104	132	104	132
481.wrf	109	102	**110**	**102**	110	102	109	102	**110**	**102**	110	102
482.sphinx3	241	80.8	234	83.2	**236**	**82.5**	240	81.3	237	82.4	**237**	**82.1**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
As tested, the system used a Supermicro
SuperChassis 113MTQ-330CB and SNK-P0046P heatsink.
Sysinfo program /home/cpu2006/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on 21-45.hnet Sun Jan 25 04:39:04 2015

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo
```

Continued on next page

Platform Notes (Continued)

```
From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E3-1231 v3 @ 3.40GHz
      1 "physical id"s (chips)
      8 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 4
      siblings  : 8
      physical 0: cores 0 1 2 3
   cache size : 8192 KB

From /proc/meminfo
   MemTotal:       32742812 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   os-release:
      NAME="Red Hat Enterprise Linux Server"
      VERSION="7.0 (Maipo)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="7.0"
      PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
      ANSI_COLOR="0;31"
      CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
   redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
   system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server

uname -a:
   Linux 21-45.hnet 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57 EDT 2014
   x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jan 23 20:43

SPEC is set to: /home/cpu2006
   Filesystem                Type  Size  Used Avail Use% Mounted on
   /dev/mapper/rhel_21--45-home xfs   423G   78G  345G  19% /home
Additional information from dmidecode:

   Warning: Use caution when you interpret this section. The 'dmidecode' program
   reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to
   hardware, firmware, and the "DMTF SMBIOS" standard.

  BIOS American Megatrends Inc. 2.00 04/24/2014
  Memory:
   4x Samsung M391B1G73QH0-CMA 8 GB 2 rank 1333 MHz, configured at 1600 MHz
```

Continued on next page

Platform Notes (Continued)

```
(End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"
OMP_NUM_THREADS = "4"

 Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB
 memory using RedHat EL 7.0
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Continued on next page

Base Portability Flags (Continued)

482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32 -ansi-alias

Continued on next page

Peak Optimization Flags (Continued)

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias -parallel

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

Continued on next page

Peak Optimization Flags (Continued)

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html
http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Feb 10 18:35:13 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 10 February 2015.