



SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp®2006 = 117

ASUS TS700-E8(Z10PE-D16WS) Server System (Intel Xeon E5-2699 v3)

SPECfp_base2006 = 111

CPU2006 license: 9016


Test date: Feb-2015

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Sep-2014

Tested by: ASUSTeK Computer Inc.

Software Availability: Sep-2013

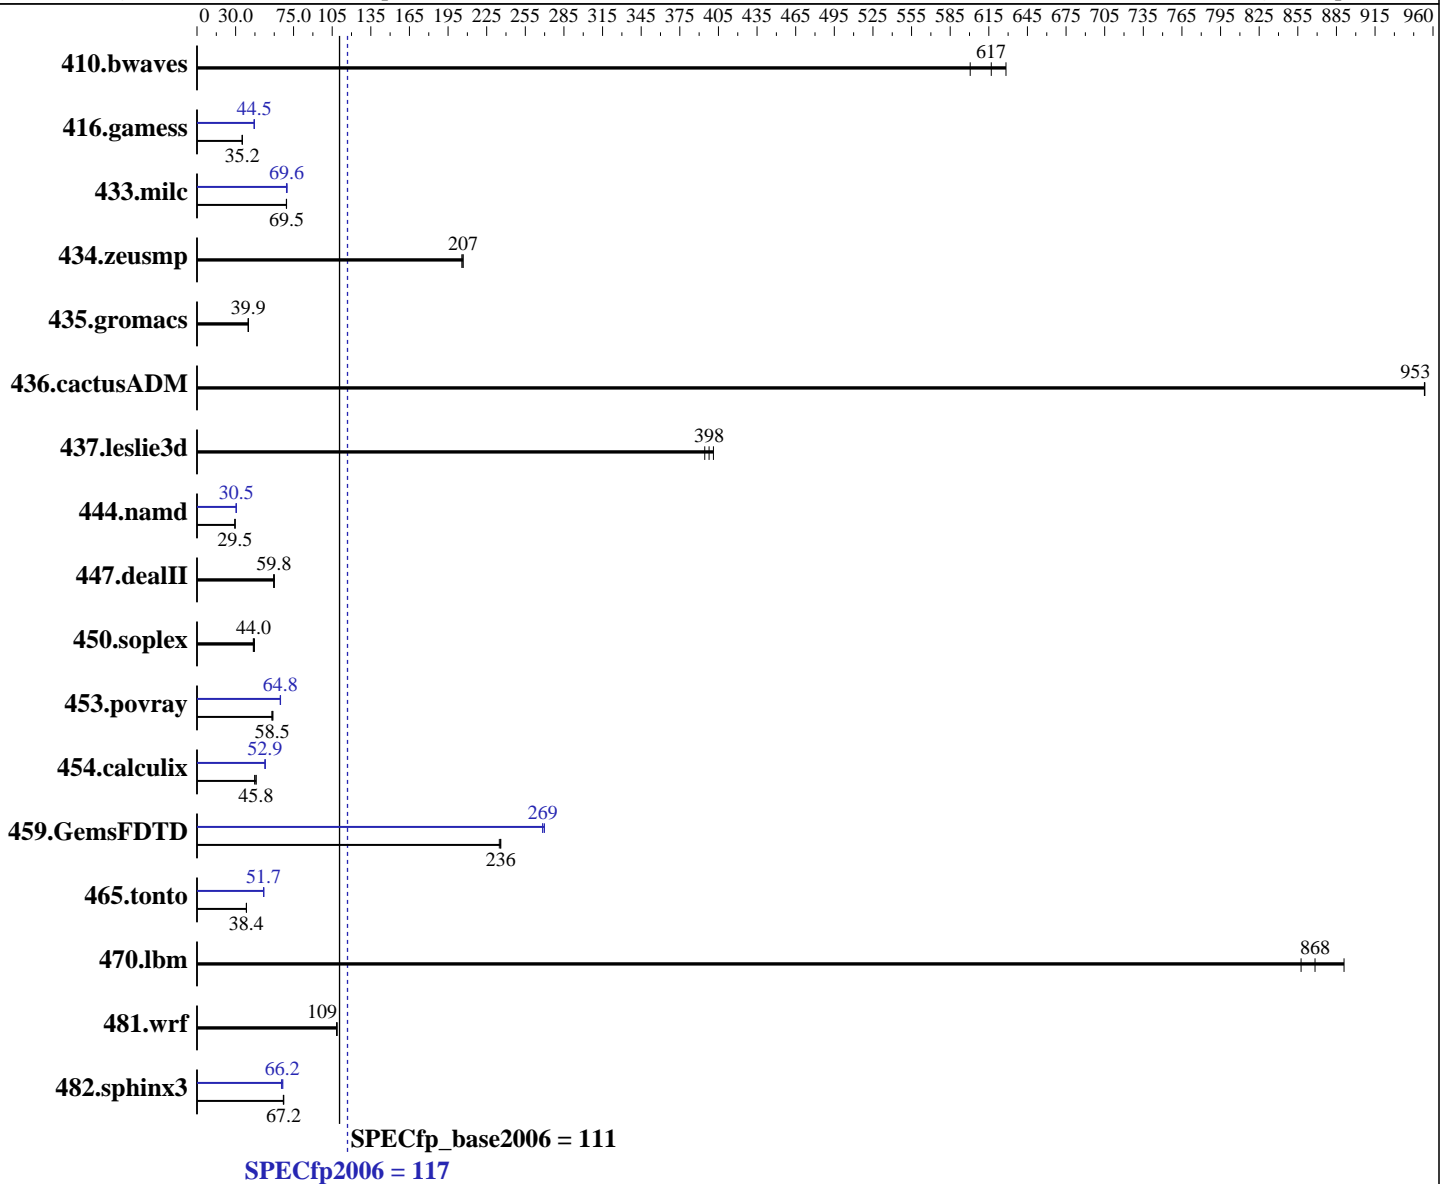

Hardware

CPU Name: Intel Xeon E5-2699 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 36 cores, 2 chips, 18 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
 2.6.32-431.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp2006 = **117**

ASUS TS700-E8(Z10PE-D16WS) Server System (Intel Xeon E5-2699 v3)

SPECfp_base2006 = **111**

CPU2006 license: 9016

Test date: Feb-2015

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Sep-2014

Tested by: ASUSTeK Computer Inc.

Software Availability: Sep-2013

L3 Cache: 45 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
Disk Subsystem: HITACHI HDP725050GLA380 1 x 500 GB SATA, 7200 RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	21.6	628	<u>22.0</u>	<u>617</u>	22.6	601	21.6	628	<u>22.0</u>	<u>617</u>	22.6	601
416.gamess	558	35.1	<u>556</u>	<u>35.2</u>	556	35.2	<u>440</u>	<u>44.5</u>	441	44.4	439	44.6
433.milc	<u>132</u>	<u>69.5</u>	132	69.4	132	69.6	132	69.5	<u>132</u>	<u>69.6</u>	131	70.0
434.zeusmp	44.2	206	<u>44.0</u>	<u>207</u>	44.0	207	44.2	206	<u>44.0</u>	<u>207</u>	44.0	207
435.gromacs	180	39.7	179	40.0	<u>179</u>	<u>39.9</u>	180	39.7	179	40.0	<u>179</u>	<u>39.9</u>
436.cactusADM	<u>12.5</u>	<u>953</u>	12.5	953	12.5	954	<u>12.5</u>	<u>953</u>	12.5	953	12.5	954
437.leslie3d	23.4	401	23.8	394	<u>23.6</u>	<u>398</u>	23.4	401	23.8	394	<u>23.6</u>	<u>398</u>
444.namd	272	29.5	<u>272</u>	<u>29.5</u>	272	29.5	263	30.5	263	30.5	<u>263</u>	<u>30.5</u>
447.dealII	<u>191</u>	<u>59.8</u>	192	59.5	190	60.1	<u>191</u>	<u>59.8</u>	192	59.5	190	60.1
450.soplex	187	44.6	191	43.7	<u>190</u>	<u>44.0</u>	187	44.6	191	43.7	<u>190</u>	<u>44.0</u>
453.povray	90.2	59.0	91.4	58.2	<u>90.9</u>	<u>58.5</u>	82.2	64.7	82.0	64.9	<u>82.2</u>	<u>64.8</u>
454.calculix	<u>180</u>	<u>45.8</u>	180	45.9	184	44.7	156	53.0	156	52.8	<u>156</u>	<u>52.9</u>
459.GemsFDTD	45.0	236	45.2	235	<u>45.0</u>	<u>236</u>	39.5	269	<u>39.5</u>	<u>269</u>	39.3	270
465.tonto	257	38.3	<u>256</u>	<u>38.4</u>	256	38.4	<u>190</u>	<u>51.7</u>	191	51.6	189	52.0
470.lbm	<u>15.8</u>	<u>868</u>	16.0	858	15.4	891	<u>15.8</u>	<u>868</u>	16.0	858	15.4	891
481.wrf	103	109	103	108	<u>103</u>	<u>109</u>	103	109	103	108	<u>103</u>	<u>109</u>
482.sphinx3	289	67.4	<u>290</u>	<u>67.2</u>	291	67.0	297	65.6	<u>294</u>	<u>66.2</u>	292	66.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:
Snoop Mode= Home Snoop
OC Tune Level = Level 2
Energy Performance BIAS setting = Performance
Link Frequency Select = 9.6GT/s
Enforce POR = Disabled
Memory Frequency = 2133
FAN = Full Speed
Sysinfo program /cpu2006/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp2006 = 117

ASUS TS700-E8(Z10PE-D16WS) Server System (Intel Xeon E5-2699 v3)

SPECfp_base2006 = 111

CPU2006 license: 9016

Test date: Feb-2015

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Sep-2014

Tested by: ASUSTeK Computer Inc.

Software Availability: Sep-2013

Platform Notes (Continued)

running on localhost.localdomain Wed Feb 4 02:44:20 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2699 v3 @ 2.30GHz
 2 "physical id"s (chips)
 72 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 18
  siblings  : 36
  physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
  physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
cache size : 46080 KB

```

```

From /proc/meminfo
MemTotal:      264630672 kB
HugePages_Total:       0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)

```

```

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

```

uname -a:
Linux localhost.localdomain 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54
EST 2013 x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Feb 3 21:36

```

SPEC is set to: /cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal        ext4  459G  188G  248G  44% /

```

```

Additional information from dmidecode:
BIOS American Megatrends Inc. 0902 01/28/2015
Memory:
 16x      16 GB
 16x Micron 36ASF2G72PZ-2G1A2 16 GB 2133 MHz 2 rank

```

(End of data from sysinfo program)



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp2006 = 117

ASUS TS700-E8(Z10PE-D16WS) Server System (Intel Xeon E5-2699 v3)

SPECfp_base2006 = 111

CPU2006 license: 9016

Test date: Feb-2015

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Sep-2014

Tested by: ASUSTeK Computer Inc.

Software Availability: Sep-2013

General Notes

Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh"
OMP_NUM_THREADS = "36"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp2006 = 117

ASUS TS700-E8(Z10PE-D16WS) Server System (Intel Xeon E5-2699 v3)

SPECfp_base2006 = 111

CPU2006 license: 9016

Test date: Feb-2015

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Sep-2014

Tested by: ASUSTeK Computer Inc.

Software Availability: Sep-2013

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32 -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias
-parallel

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp2006 = 117

ASUS TS700-E8(Z10PE-D16WS) Server System (Intel Xeon E5-2699 v3)

SPECfp_base2006 = 111

CPU2006 license: 9016

Test date: Feb-2015

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Sep-2014

Tested by: ASUSTeK Computer Inc.

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.html>

<http://www.spec.org/cpu2006/flags/ASUSTekPlatformWS-Settings-V1.2-revA.html>



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS TS700-E8(Z10PE-D16WS) Server System (Intel Xeon E5-2699 v3)

SPECfp2006 = 117

SPECfp_base2006 = 111

CPU2006 license: 9016

Test sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test date: Feb-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2013

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.xml>

<http://www.spec.org/cpu2006/flags/ASUSTekPlatformWS-Settings-V1.2-revA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Feb 25 11:31:15 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 February 2015.