SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M4 (Intel Xeon E5-2667 v3 @ 3.20GHz)

SPECint®_rate2006 = 842

SPECint_rate_base2006 = 814

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: Feb-2015
Hardware Availability: Sep-2014
Software Availability: Jul-2014

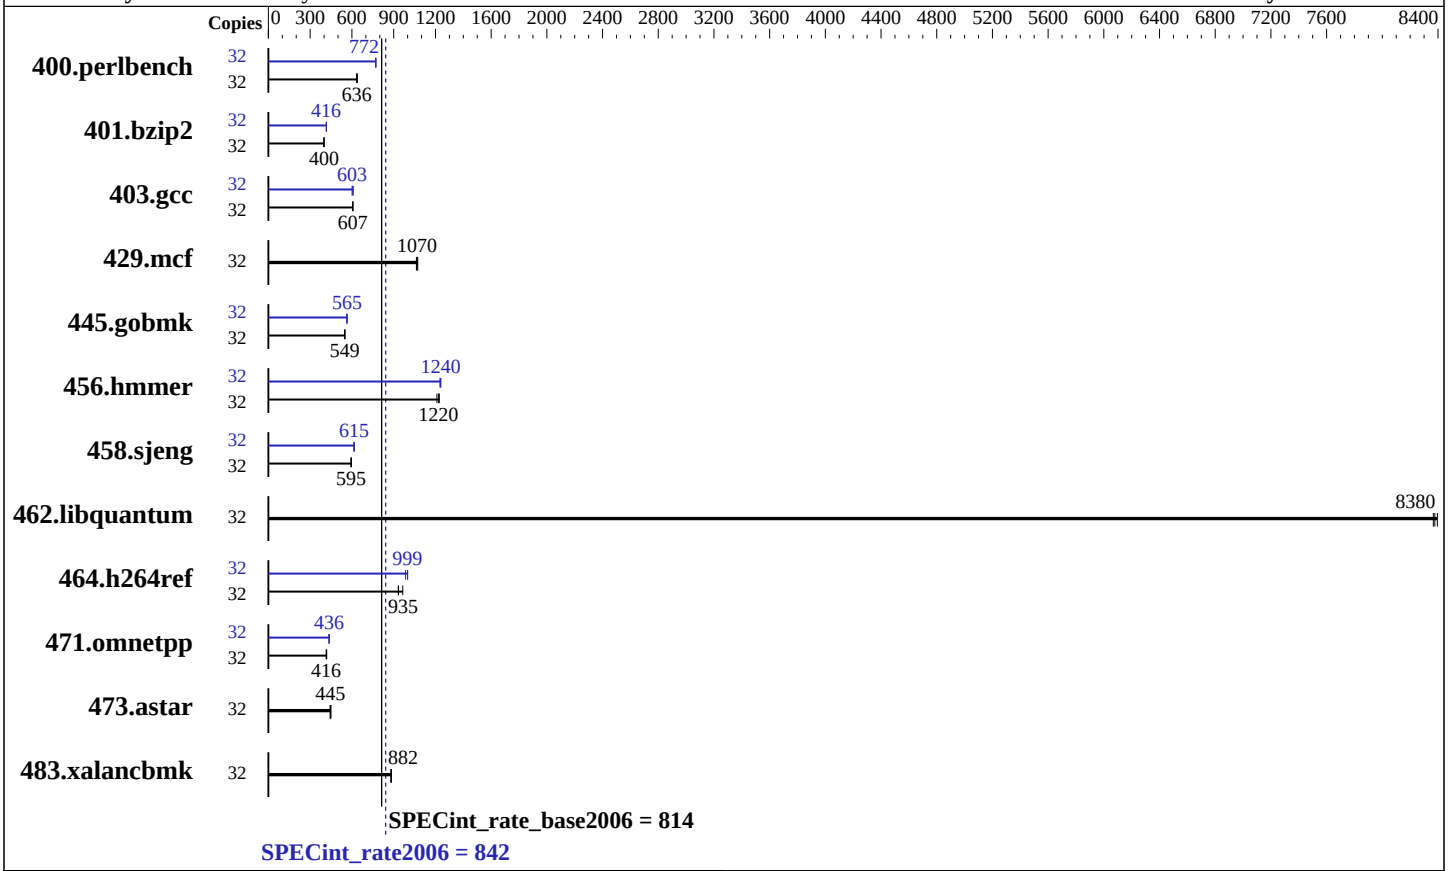

Hardware

CPU Name:	Intel Xeon E5-2667 v3
CPU Characteristics:	Intel Turbo Boost Technology up to 3.60 GHz
CPU MHz:	3200
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	20 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
Disk Subsystem:	1 x 300GB SAS, 15K RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 7.0 (Maipo) 3.10.0-123.el7.x86_64
Compiler:	C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux; Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	None

SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M4 (Intel Xeon E5-2667 v3 @ 3.20GHz)

SPECint_rate2006 = 842

SPECint_rate_base2006 = 814

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: Feb-2015
Hardware Availability: Sep-2014
Software Availability: Jul-2014

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	490	638	**492**	**636**	493	634	32	**405**	**772**	406	770	405	772
401.bzip2	32	771	401	775	398	**773**	**400**	32	740	417	743	416	**742**	**416**
403.gcc	32	425	606	424	607	**425**	**607**	32	423	610	428	602	**427**	**603**
429.mcf	32	272	1070	**273**	**1070**	274	1060	32	272	1070	**273**	**1070**	274	1060
445.gobmk	32	612	549	611	549	**611**	**549**	32	594	565	596	563	**594**	**565**
456.hmmer	32	247	1210	243	1230	**244**	**1220**	32	241	1240	242	1230	**241**	**1240**
458.sjeng	32	651	595	**651**	**595**	652	594	32	628	617	630	615	**629**	**615**
462.libquantum	32	**79.1**	**8380**	79.3	8370	79.0	8400	32	**79.1**	**8380**	79.3	8370	79.0	8400
464.h264ref	32	**758**	**935**	759	933	734	965	32	708	1000	719	985	**709**	**999**
471.omnetpp	32	**481**	**416**	481	416	477	419	32	**458**	**436**	459	435	458	437
473.astar	32	506	444	499	450	**505**	**445**	32	506	444	499	450	**505**	**445**
483.xalancbmk	32	**250**	**882**	250	883	251	880	32	**250**	**882**	250	883	251	880

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
CPU Performance set to HPC
Power Technology set to Custom
Processor Power State C6 set to Disabled
Energy Performance BIAS setting set to Performance
Memory RAS configuration set to Maximum Performance
QPI Snoop Mode set to Early Snoop
 Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6818
 $Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
 running on linux-ezi5 Wed Feb 11 21:59:15 2015

 This section contains SUT (System Under Test) info as seen by
 some common utilities.  To remove or add to this section, see:
   http://www.spec.org/cpu2006/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2667 v3 @ 3.20GHz
       2 "physical id"s (chips)
```

Continued on next page

Platform Notes (Continued)

```
        32 "processors"
     cores, siblings (Caution: counting these is hw and system dependent.  The
     following excerpts from /proc/cpuinfo might not be reliable.  Use with
     caution.)
        cpu cores : 8
        siblings  : 16
        physical 0: cores 0 1 2 3 4 5 6 7
        physical 1: cores 0 1 2 3 4 5 6 7
     cache size : 20480 KB

  From /proc/meminfo
     MemTotal:       264278244 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /usr/bin/lsb_release -d
     SUSE Linux Enterprise Server 11 (x86_64)

  From /etc/*release* /etc/*version*
     SuSE-release:
        SUSE Linux Enterprise Server 11 (x86_64)
        VERSION = 11
        PATCHLEVEL = 3

  uname -a:
     Linux linux-ezi5 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013
     (ccab990) x86_64 x86_64 x86_64 GNU/Linux

  run-level 5 Feb 11 21:58 last=S

  SPEC is set to: /opt/cpu2006-1.2
     Filesystem     Type  Size  Used Avail Use% Mounted on
     /dev/sda2      ext3  273G   12G  260G   5% /

  Additional information from dmidecode:
    BIOS Cisco Systems, Inc. B200M4.2.2.3d.0.111420141438 11/14/2014
    Memory:
     16x 0xCE00 M393A2G40DB0-CPB 16 GB 2133 MHz
     8x NO DIMM NO DIMM

  (End of data from sysinfo program)
```

General Notes

```
 Environment variables set by runspec before the start of the run:
 LD_LIBRARY_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64:/opt/cpu2006-1.2/sh"

  Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
  memory using RedHat EL 6.4
  Transparent Huge Pages enabled with:
  echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Continued on next page

General Notes (Continued)

```
Filesystem page cache cleared with:
echo 1>       /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
`icc -m32`

C++ benchmarks:
`icpc -m32`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`

C++ benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m32`

400.perlbench: `icc -m64`

Continued on next page

Peak Compiler Invocation (Continued)

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:
icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

464.h264ref: `-xCORE-AVX2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-unroll2 -ansi-alias`

C++ benchmarks:

471.omnetpp: `-xCORE-AVX2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/sh -lsmartheap`

473.astar: `basepeak = yes`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html`
`http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revC.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml`
`http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revC.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Apr 9 16:48:48 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 10 March 2015.