SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer RS140 (Intel Xeon E3-1226 v3, 3.30 GHz)

SPECint®2006 = 60.4

SPECint_base2006 = 58.7

CPU2006 license: 9017
Test sponsor: Lenovo Group Limited
Tested by: Lenovo Group Limited

Test date: Mar-2015
Hardware Availability: Jun-2014
Software Availability: Sep-2014

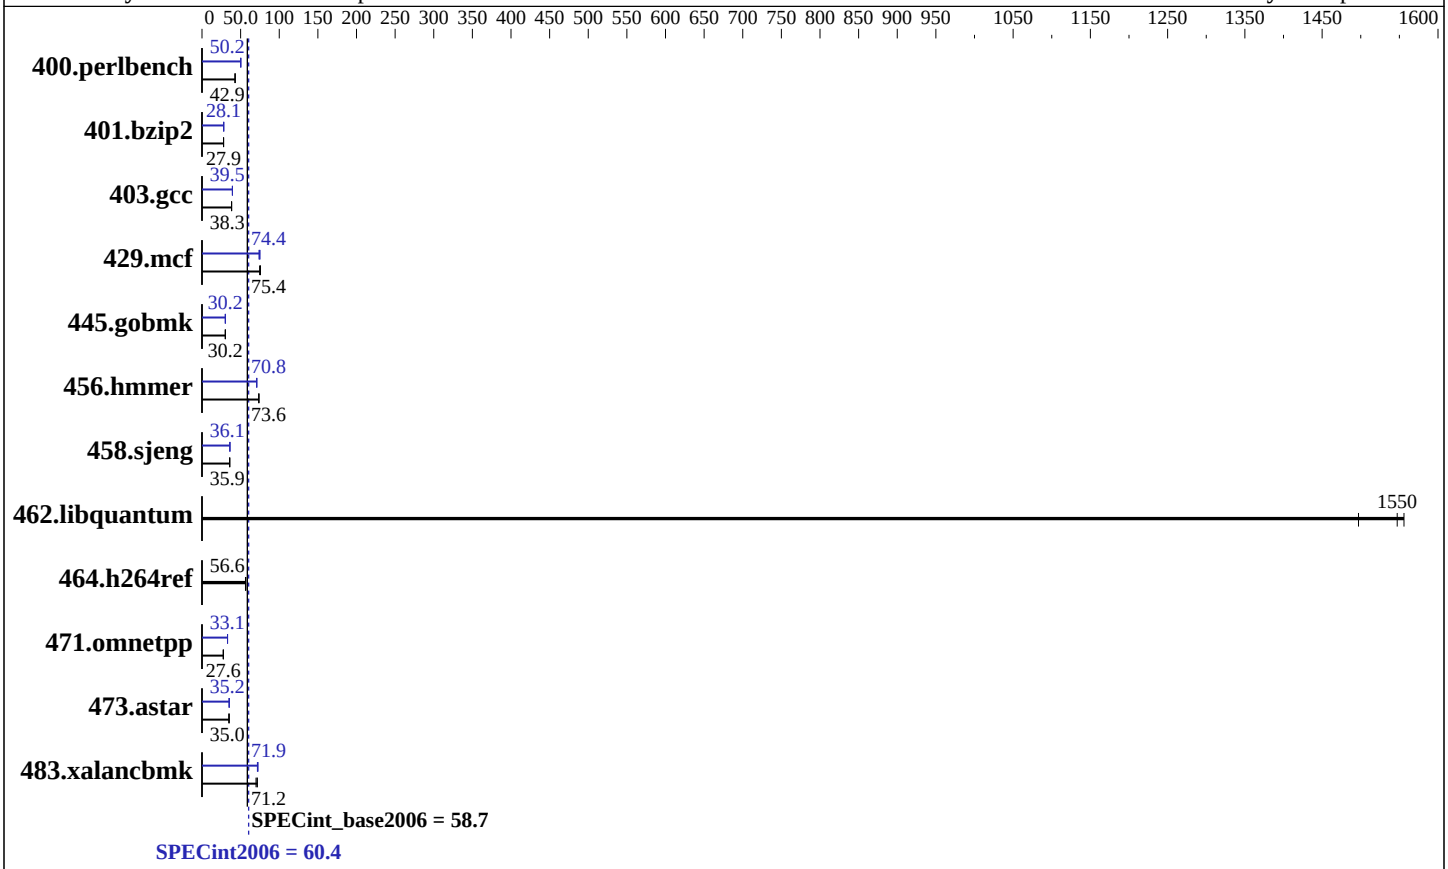

Hardware

CPU Name:	Intel Xeon E3-1226 v3
CPU Characteristics:	Intel Turbo Boost Technology up to 3.70 GHz
CPU MHz:	3300
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	8 MB I+D on chip per chip
Other Cache:	None
Memory:	16 GB (2 x 8 GB 2Rx8 PC3L-12800E-11, ECC)
Disk Subsystem:	1 x 120 GB SATA SSD
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 7.0 (Maipo) 3.10.0-123.el7.x86_64
Compiler:	C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux
Auto Parallel:	Yes
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0

SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer RS140 (Intel Xeon E3-1226 v3, 3.30 GHz)

SPECint2006 = 60.4

SPECint_base2006 = 58.7

CPU2006 license: 9017
Test sponsor: Lenovo Group Limited
Tested by: Lenovo Group Limited

Test date: Mar-2015
Hardware Availability: Jun-2014
Software Availability: Sep-2014

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	**228**	**42.9**	228	42.9	228	42.8	195	50.1	194	50.3	**195**	**50.2**
401.bzip2	347	27.8	**345**	**27.9**	345	28.0	343	28.1	**343**	**28.1**	343	28.1
403.gcc	210	38.4	**210**	**38.3**	210	38.3	204	39.5	**204**	**39.5**	205	39.3
429.mcf	**121**	**75.4**	120	75.7	122	74.6	**123**	**74.4**	121	75.2	124	73.8
445.gobmk	347	30.2	**347**	**30.2**	348	30.2	**347**	**30.2**	347	30.3	348	30.2
456.hmmer	**127**	**73.6**	127	73.5	127	73.6	**132**	**70.8**	131	71.0	132	70.8
458.sjeng	339	35.7	337	35.9	**337**	**35.9**	336	36.0	**335**	**36.1**	335	36.2
462.libquantum	13.8	1500	**13.4**	**1550**	13.3	1560	13.8	1500	**13.4**	**1550**	13.3	1560
464.h264ref	391	56.6	**391**	**56.6**	393	56.3	391	56.6	**391**	**56.6**	393	56.3
471.omnetpp	228	27.5	225	27.7	**226**	**27.6**	**189**	**33.1**	189	33.0	189	33.1
473.astar	199	35.2	202	34.7	**200**	**35.0**	199	35.3	**200**	**35.2**	200	35.1
483.xalancbmk	96.3	71.7	98.7	69.9	**96.9**	**71.2**	95.1	72.6	**96.0**	**71.9**	96.2	71.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS configuration
ICE Performance Modes set to Full Speed
C1E Support set to Disabled
 Sysinfo program /usr/cpu2006/config/sysinfo.rev6914
 $Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
 running on RS140 Mon Mar  9 22:51:48 2015

 This section contains SUT (System Under Test) info as seen by
 some common utilities.  To remove or add to this section, see:
   http://www.spec.org/cpu2006/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E3-1226 v3 @ 3.30GHz
       1 "physical id"s (chips)
       4 "processors"
    cores, siblings (Caution: counting these is hw and system dependent.  The
    following excerpts from /proc/cpuinfo might not be reliable.  Use with
    caution.)
       cpu cores : 4
```

Continued on next page

Platform Notes (Continued)

```
        siblings  : 4
        physical 0: cores 0 1 2 3
     cache size : 8192 KB

  From /proc/meminfo
     MemTotal:       16155464 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     os-release:
        NAME="Red Hat Enterprise Linux Server"
        VERSION="7.0 (Maipo)"
        ID="rhel"
        ID_LIKE="fedora"
        VERSION_ID="7.0"
        PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
        ANSI_COLOR="0;31"
        CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
     redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
     system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
     system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server

  uname -a:
     Linux RS140 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57 EDT 2014 x86_64
     x86_64 x86_64 GNU/Linux

  run-level 3 Mar 9 22:49

  SPEC is set to: /usr/cpu2006
     Filesystem     Type  Size  Used Avail Use% Mounted on
     /dev/sda2      xfs   108G  9.9G   98G  10% /
  Additional information from dmidecode:

     Warning: Use caution when you interpret this section. The 'dmidecode' program
     reads system data which is "intended to allow hardware to be accurately
     determined", but the intent may not be met, as there are frequent changes to
     hardware, firmware, and the "DMTF SMBIOS" standard.

    BIOS LENOVO FBKT84CUS 09/30/2014
    Memory:
     2x Hynix/Hyundai HMT41GU7AFR8A-PB 8 GB 2 rank 1600 MHz
     2x [Empty] [Empty]

   (End of data from sysinfo program)
RS140 support 2 channels and 2 DIMMs per channel, total 4 DIMMs.
2DIMM slots installed with 8 GB DIMM for this run.
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"
OMP_NUM_THREADS = "4"

 Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB
 memory using RedHat EL 7.0
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Base Compiler Invocation

C benchmarks:
```
icc  -m64
```

C++ benchmarks:
```
icpc -m64
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
445.gobmk: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
471.omnetpp: `-DSPEC_CPU_LP64`
473.astar: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32
```

C++ benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh -lsmartheap64
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m64`

400.perlbench: `icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32`

445.gobmk: `icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32`

C++ benchmarks (except as noted below):
`icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32`

473.astar: `icpc -m64`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
473.astar: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xCORE-AVX2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-opt-prefetch -ansi-alias`

401.bzip2: `-xCORE-AVX2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div -prof-use`(pass 2) `-auto-ilp32 -opt-prefetch -ansi-alias`

Continued on next page

Peak Optimization Flags (Continued)

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc -opt-malloc-options=3 -auto-ilp32

429.mcf: -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32 -ansi-alias

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-ra-region-strategy=block -ansi-alias -Wl,-z,muldefs -L/sh -lsmartheap

473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -Wl,-z,muldefs -L/sh -lsmartheap64

483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias -Wl,-z,muldefs -L/sh -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html
http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-RS140-revA.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-RS140-revA.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Apr 8 11:02:43 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 7 April 2015.