SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

Huawei RH2288 V3 (Intel Xeon E5-2658 v3)

SPECint®2006 = 55.5

SPECint_base2006 = 53.4

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Mar-2015
Hardware Availability: Feb-2015
Software Availability: Sep-2014

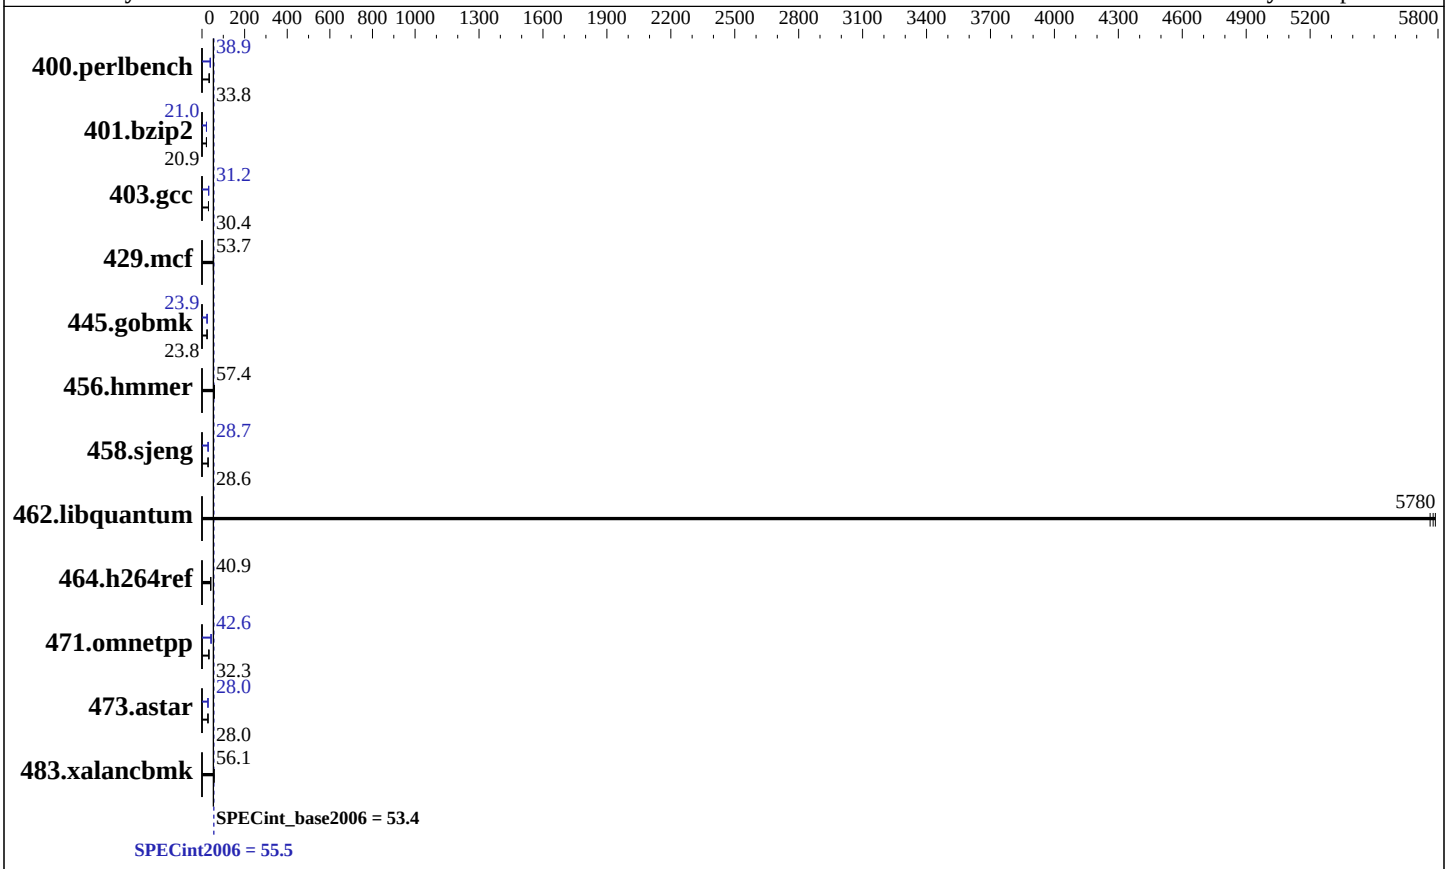

Hardware

CPU Name:	Intel Xeon E5-2658 v3
CPU Characteristics:	Intel Turbo Boost Technology up to 2.90 GHz
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	24 cores, 2 chips, 12 cores/chip
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	30 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
Disk Subsystem:	1 x 500 GB SATA, 7200 RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 7.0 (Maipo) 3.10.0-123.el7.x86_64
Compiler:	C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux
Auto Parallel:	Yes
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0

SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

Huawei RH2288 V3 (Intel Xeon E5-2658 v3)

SPECint2006 = 55.5

SPECint_base2006 = 53.4

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Mar-2015
Hardware Availability: Feb-2015
Software Availability: Sep-2014

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	289	33.8	**289**	**33.8**	289	33.8	**251**	**38.9**	251	38.9	252	38.7
401.bzip2	**462**	**20.9**	461	20.9	462	20.9	459	21.0	459	21.0	**459**	**21.0**
403.gcc	264	30.5	**265**	**30.4**	265	30.4	258	31.2	**258**	**31.2**	258	31.2
429.mcf	**170**	**53.7**	171	53.4	167	54.6	**170**	**53.7**	171	53.4	167	54.6
445.gobmk	**441**	**23.8**	440	23.9	442	23.7	439	23.9	**439**	**23.9**	439	23.9
456.hmmer	162	57.5	**162**	**57.4**	162	57.4	162	57.5	**162**	**57.4**	162	57.4
458.sjeng	424	28.6	424	28.5	**424**	**28.6**	422	28.7	**422**	**28.7**	422	28.7
462.libquantum	3.60	5760	**3.59**	**5780**	3.58	5790	3.60	5760	**3.59**	**5780**	3.58	5790
464.h264ref	543	40.8	541	40.9	**541**	**40.9**	543	40.8	541	40.9	**541**	**40.9**
471.omnetpp	193	32.4	195	32.1	**193**	**32.3**	146	42.8	**147**	**42.6**	147	42.4
473.astar	252	27.8	**250**	**28.0**	250	28.1	**251**	**28.0**	251	27.9	249	28.2
483.xalancbmk	**123**	**56.1**	122	56.4	123	56.1	**123**	**56.1**	122	56.4	123	56.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS configuration:
Set Power Efficiency Mode to Custom
Set Snoop Mode to ES mode
Set Intel Hyper-threading Technology to Disable
Sysinfo program /spec15/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on localhost.localdomain Fri Mar 13 23:54:38 2015

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2658 v3 @ 2.20GHz
      2 "physical id"s (chips)
      24 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
```

Continued on next page

Platform Notes (Continued)

```
        cpu cores : 12
        siblings  : 12
        physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
        physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
     cache size : 30720 KB

  From /proc/meminfo
     MemTotal:       263720560 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     os-release:
        NAME="Red Hat Enterprise Linux Server"
        VERSION="7.0 (Maipo)"
        ID="rhel"
        ID_LIKE="fedora"
        VERSION_ID="7.0"
        PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
        ANSI_COLOR="0;31"
        CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
     redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
     system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
     system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server

  uname -a:
     Linux localhost.localdomain 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57
     EDT 2014 x86_64 x86_64 x86_64 GNU/Linux

  run-level 3 Mar 13 05:37

  SPEC is set to: /spec15
     Filesystem     Type  Size  Used Avail Use% Mounted on
     /dev/sda1      ext4  458G   38G  397G   9% /
  Additional information from dmidecode:

     Warning: Use caution when you interpret this section. The 'dmidecode' program
     reads system data which is "intended to allow hardware to be accurately
     determined", but the intent may not be met, as there are frequent changes to
     hardware, firmware, and the "DMTF SMBIOS" standard.

    BIOS Insyde Corp. 1.17 09/03/2014
    Memory:
     8x Micron 36ASF2G72PZ-2G1A2 16 GB 1 rank 2133 MHz
     8x Micron 36ASF2G72PZ-2G1A2 16 GB 2 rank 2133 MHz

  (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/spec15/libs/32:/spec15/libs/64:/spec15/sh"
OMP_NUM_THREADS = "24"

 Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB
 memory using RedHat EL 7.0
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
icc  -m64
```

C++ benchmarks:
```
icpc -m64
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
445.gobmk: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
471.omnetpp: `-DSPEC_CPU_LP64`
473.astar: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32
```

C++ benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh -lsmartheap64
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m64`

400.perlbench: `icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32`

445.gobmk: `icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32`

C++ benchmarks (except as noted below):
`icpc -m64`

471.omnetpp: `icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
473.astar: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xCORE-AVX2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-opt-prefetch -ansi-alias`

401.bzip2: `-xCORE-AVX2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div -prof-use`(pass 2) `-auto-ilp32 -opt-prefetch -ansi-alias`

Continued on next page

Peak Optimization Flags (Continued)

403.gcc: `-xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc -opt-malloc-options=3 -auto-ilp32`

429.mcf: `basepeak = yes`

445.gobmk: `-xCORE-AVX2`(pass 2) `-prof-gen`(pass 1) `-prof-use`(pass 2) `-ansi-alias`

456.hmmer: `basepeak = yes`

458.sjeng: `-xCORE-AVX2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-unroll4`

462.libquantum: `basepeak = yes`

464.h264ref: `basepeak = yes`

C++ benchmarks:

471.omnetpp: `-xCORE-AVX2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-opt-ra-region-strategy=block -ansi-alias -Wl,-z,muldefs -L/sh -lsmartheap`

473.astar: `-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -Wl,-z,muldefs -L/sh -lsmartheap64`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html`
`http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.4.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml`
`http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.4.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Apr 8 11:02:42 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 7 April 2015.