



SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®_rate2006 = 428

PowerEdge R530xd (Intel Xeon E5-2623 v3, 3.00 GHz)

SPECint_rate_base2006 = 410

CPU2006 license: 55


Test date: May-2015

Test sponsor: Dell Inc.

Hardware Availability: May-2015

Tested by: Dell Inc.

Software Availability: Nov-2014

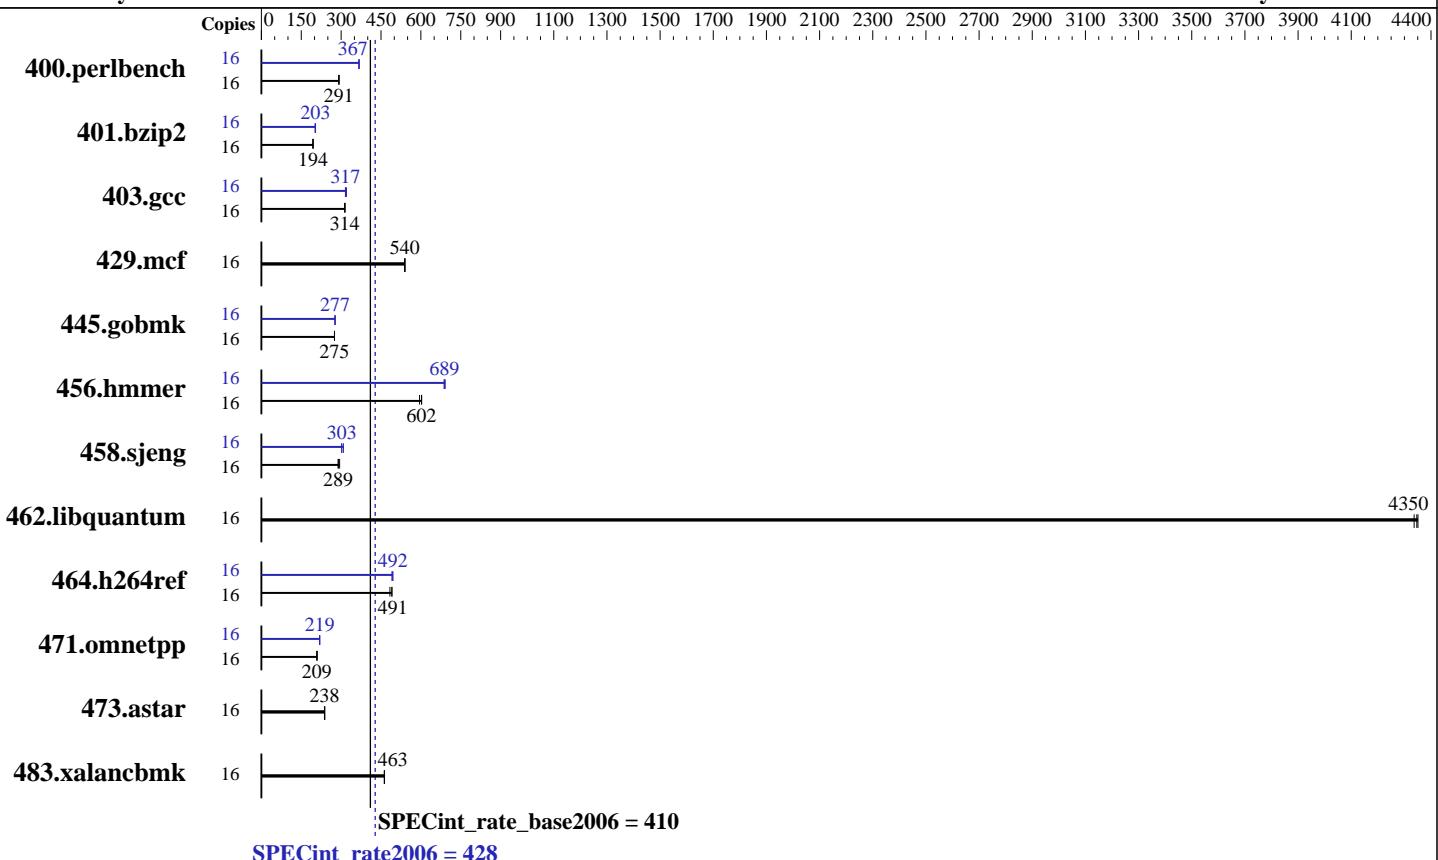

Hardware

CPU Name:	Intel Xeon E5-2623 v3
CPU Characteristics:	Intel Turbo Boost Technology up to 3.50 GHz
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	10 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx4 PC4-2133P-R, running at 1866 MHz)
Disk Subsystem:	500 GB 7200 RPM SATA
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 7.0 (Maipo) 3.10.0-123.el7.x86_64
Compiler:	C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

<p>Dell Inc.</p> <p>PowerEdge R530xd (Intel Xeon E5-2623 v3, 3.00 GHz)</p> <p>CPU2006 license: 55</p> <p>Test sponsor: Dell Inc.</p> <p>Tested by: Dell Inc.</p>	<p>SPECint_rate2006 = 428</p> <p>SPECint_rate_base2006 = 410</p> <p>Test date: May-2015</p> <p>Hardware Availability: May-2015</p> <p>Software Availability: Nov-2014</p>
-------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	537	291	536	291	535	292	16	425	368	426	367	426	367
401.bzip2	16	794	194	798	194	792	195	16	763	202	760	203	759	203
403.gcc	16	411	313	409	315	410	314	16	407	316	402	320	407	317
429.mcf	16	271	539	270	540	270	540	16	271	539	270	540	270	540
445.gobmk	16	610	275	611	275	610	275	16	606	277	605	277	605	277
456.hmmer	16	251	595	248	603	248	602	16	216	692	217	687	217	689
458.sjeng	16	669	289	670	289	658	294	16	627	309	640	303	641	302
462.libquantum	16	76.2	4350	76.3	4350	76.4	4340	16	76.2	4350	76.3	4350	76.4	4340
464.h264ref	16	721	491	721	491	732	484	16	719	492	715	495	720	492
471.omnetpp	16	480	209	478	209	477	210	16	457	219	456	219	456	219
473.astar	16	470	239	473	238	473	237	16	470	239	473	238	473	237
483.xalancbmk	16	238	463	238	463	239	462	16	238	463	238	463	239	462

Results appear in the order in which they were run. **Bold underlined** text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS settings:

Snoop Mode set to Cluster on Die
Virtualization Technology disabled

Virtualization technology, disable System Profile set to Performance

System PROFILE set to PERFORMANCE
Sysinfo program /root/cpu2006-1.2/config/sysinfo rev6914

Sysinfo program /1800/cpus000-1.2/config/sysinfo.1.e8914
\$Rev: 6914 \$ \$Date:: 2014-06-25 ##\$ e3fbh8667hb5a285932ceab81e28219e1

\$REV: 6914 \$Date: 2014-06-25 11:03:06 +0200 (Fr, 25 Jun 2014) \$Branch: trunk

running on localhost.localdomain Fri May 8 09:02:52 2015

This section contains SUT (System Under test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2623 v3 @ 3.00GHz

del name : Intel(R) Xeon(R)

2 "physical id"
16 "logical name"

16 "processors" siblings (Caution: counting these is by and system dependent). The

ting these is
Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 428

PowerEdge R530xd (Intel Xeon E5-2623 v3, 3.00 GHz)

SPECint_rate_base2006 = 410

CPU2006 license: 55

Test date: May-2015

Test sponsor: Dell Inc.

Hardware Availability: May-2015

Tested by: Dell Inc.

Software Availability: Nov-2014

Platform Notes (Continued)

following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 4
siblings   : 8
physical 0: cores 0 1 2 3
physical 1: cores 0 1 2 3
cache size : 10240 KB
```

```
From /proc/meminfo
MemTotal:      264045712 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.0 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="7.0"
  PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
  ANSI_COLOR="0;31"
  CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57
EDT 2014 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 May 8 09:02
```

```
SPEC is set to: /root/cpu2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda1        ext4  489G  20G  444G  5%  /
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS Dell Inc. 1.0.0 04/16/2015
Memory:
 13x 00AD00B300AD HMA42GR7MFR4N-TFTD 16 GB 2 rank 2133 MHz, configured at 1866
 MHz
 3x 00AD063200AD HMA42GR7MFR4N-TFT1 16 GB 2 rank 2133 MHz, configured at 1866
 MHz
```

(End of data from sysinfo program)



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 428

PowerEdge R530xd (Intel Xeon E5-2623 v3, 3.00 GHz)

SPECint_rate_base2006 = 410

CPU2006 license: 55

Test date: May-2015

Test sponsor: Dell Inc.

Hardware Availability: May-2015

Tested by: Dell Inc.

Software Availability: Nov-2014

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

C++ benchmarks:

icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 428

PowerEdge R530xd (Intel Xeon E5-2623 v3, 3.00 GHz)

SPECint_rate_base2006 = 410

CPU2006 license: 55

Test date: May-2015

Test sponsor: Dell Inc.

Hardware Availability: May-2015

Tested by: Dell Inc.

Software Availability: Nov-2014

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll14 -auto-ilp32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R530xd (Intel Xeon E5-2623 v3, 3.00 GHz)

SPECint_rate2006 = 428

SPECint_rate_base2006 = 410

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: May-2015

Hardware Availability: May-2015

Software Availability: Nov-2014

Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll12 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=__alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revE.20150421.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revE.20150421.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Jun 17 10:49:29 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 16 June 2015.