SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3550 M5
(Intel Xeon E5-2695 v3, 2.30 GHz)

SPECfp®2006 = 109

SPECfp_base2006 = 104

CPU2006 license: 9017
Test sponsor: Lenovo Group Limited
Tested by: Lenovo Group Limited

Test date: May-2015
Hardware Availability: Oct-2014
Software Availability: Sep-2014

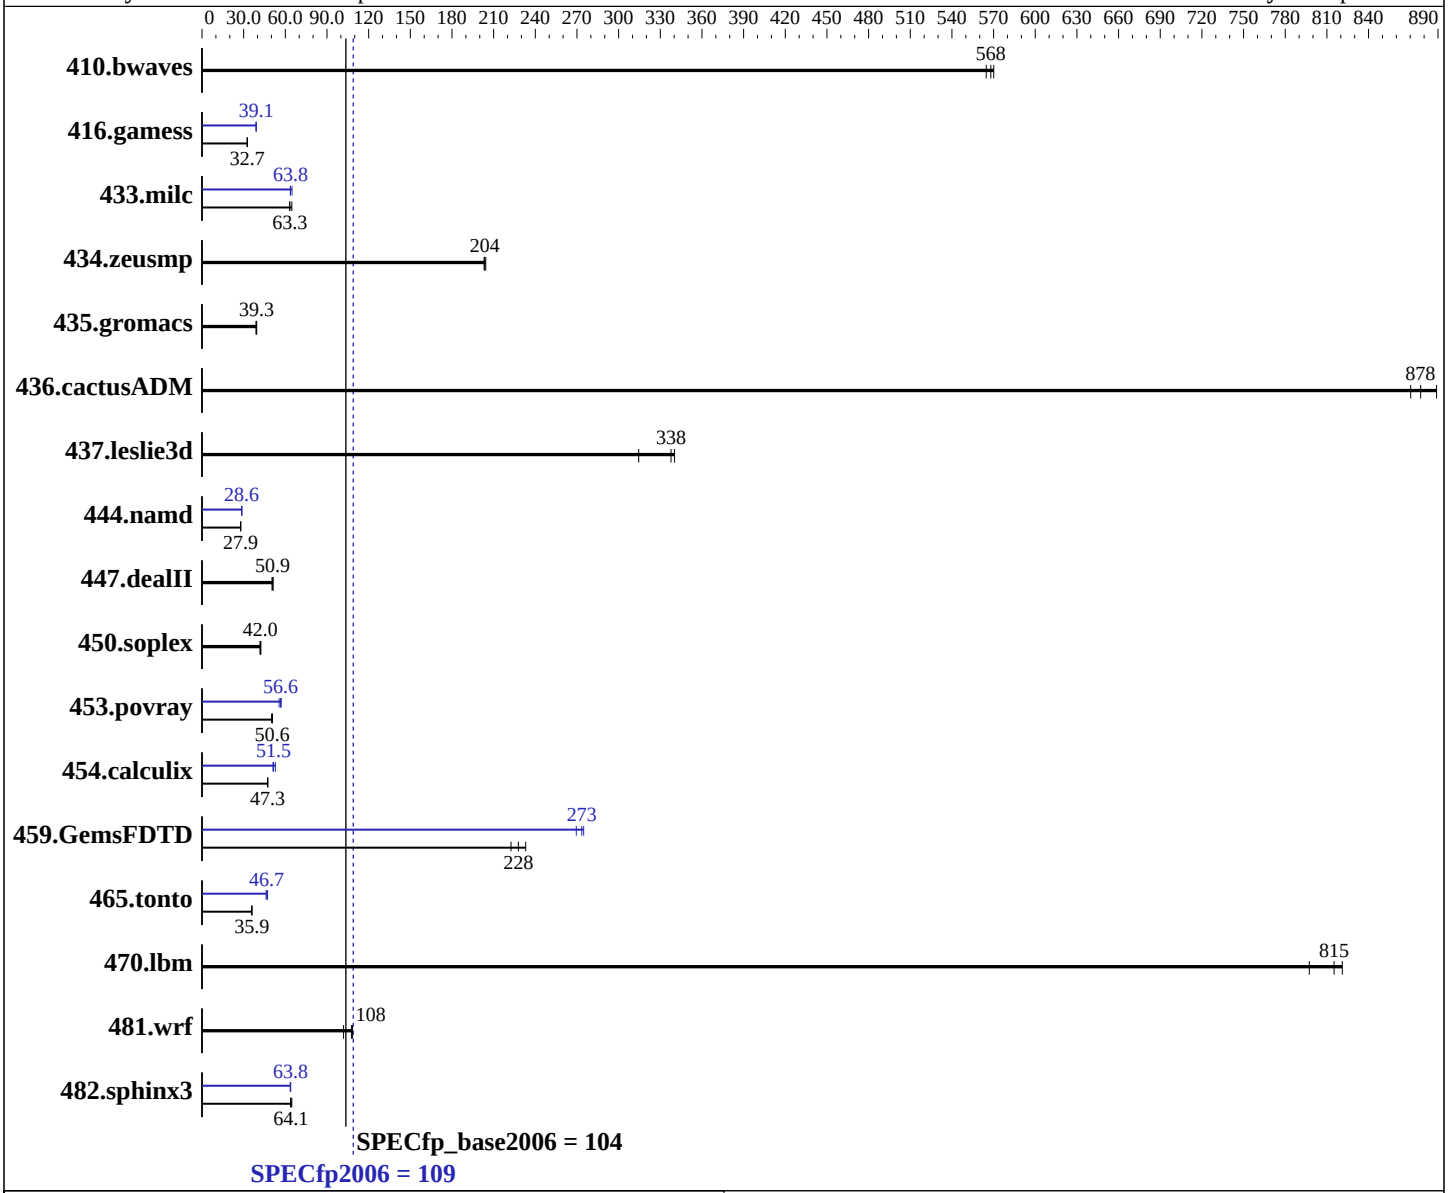

Hardware

CPU Name:	Intel Xeon E5-2695 v3
CPU Characteristics:	Intel Turbo Boost Technology up to 3.30 GHz
CPU MHz:	2300
FPU:	Integrated
CPU(s) enabled:	28 cores, 2 chips, 14 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 7.0 (Maipo) 3.10.0-123.el7.x86_64
Compiler:	C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux; Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
Auto Parallel:	Yes
File System:	xfs

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3550 M5
(Intel Xeon E5-2695 v3, 2.30 GHz)

SPECfp2006 = 109

SPECfp_base2006 = 104

CPU2006 license: 9017
Test sponsor: Lenovo Group Limited
Tested by: Lenovo Group Limited

Test date: May-2015
Hardware Availability: Oct-2014
Software Availability: Sep-2014

L3 Cache:	35 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
Disk Subsystem:	1 x 300 GB SAS, 10000 RPM
Other Hardware:	None

System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other Software:	None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24.1	565	**23.9**	**568**	23.8	570	24.1	565	**23.9**	**568**	23.8	570
416.gamess	604	32.4	598	32.7	**599**	**32.7**	**501**	**39.1**	501	39.1	503	38.9
433.milc	146	63.1	**145**	**63.3**	142	64.7	**144**	**63.8**	144	63.6	142	64.8
434.zeusmp	**44.7**	**204**	44.5	204	44.8	203	**44.7**	**204**	44.5	204	44.8	203
435.gromacs	181	39.4	**182**	**39.3**	184	38.8	181	39.4	**182**	**39.3**	184	38.8
436.cactusADM	13.4	889	**13.6**	**878**	13.7	870	13.4	889	**13.6**	**878**	13.7	870
437.leslie3d	29.9	314	27.6	340	**27.8**	**338**	29.9	314	27.6	340	**27.8**	**338**
444.namd	**287**	**27.9**	287	27.9	289	27.7	280	28.6	280	28.7	**280**	**28.6**
447.dealII	**225**	**50.9**	227	50.4	224	51.2	**225**	**50.9**	227	50.4	224	51.2
450.soplex	199	41.8	**199**	**42.0**	197	42.4	199	41.8	**199**	**42.0**	197	42.4
453.povray	**105**	**50.6**	105	50.8	106	50.1	93.3	57.0	**94.0**	**56.6**	95.9	55.5
454.calculix	174	47.4	175	47.2	**174**	**47.3**	161	51.1	156	52.9	**160**	**51.5**
459.GemsFDTD	45.5	233	47.7	223	**46.6**	**228**	39.4	270	38.6	275	**38.8**	**273**
465.tonto	274	35.9	**274**	**35.9**	275	35.8	213	46.2	208	47.2	**211**	**46.7**
470.lbm	**16.9**	**815**	16.7	821	17.2	797	**16.9**	**815**	16.7	821	17.2	797
481.wrf	**104**	**108**	110	102	103	108	**104**	**108**	110	102	103	108
482.sphinx3	306	63.8	301	64.7	**304**	**64.1**	**306**	**63.8**	305	63.9	307	63.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS setting:
Operating Mode set to "Efficiency-Favor Performance"
Sysinfo program /home/SPEC/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on x3550m5.labs.lenovo.com Mon May 18 20:46:28 2015

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo
```

Continued on next page

Platform Notes (Continued)

```
From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2695 v3 @ 2.30GHz
      2 "physical id"s (chips)
      56 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 14
      siblings  : 28
      physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
      physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
   cache size : 35840 KB

From /proc/meminfo
   MemTotal:       263445696 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   os-release:
      NAME="Red Hat Enterprise Linux Server"
      VERSION="7.0 (Maipo)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="7.0"
      PRETTY_NAME="Red Hat Enterprise Linux"
      ANSI_COLOR="0;31"
      CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
   os-release.rpmnew:
      NAME="Red Hat Enterprise Linux Server"
      VERSION="7.1 (Maipo)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="7.1"
      PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
      ANSI_COLOR="0;31"
      CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"
   redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
   system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server

uname -a:
   Linux x3550m5.labs.lenovo.com 3.10.0-229.1.2.el7.x86_64 #1 SMP Fri Mar 6
   17:12:08 EST 2015 x86_64 x86_64 x86_64 GNU/Linux


SPEC is set to: /home/SPEC
   Filesystem            Type  Size  Used Avail Use% Mounted on
   /dev/mapper/rhel-root xfs   275G   31G  245G  11% /
Additional information from dmidecode:

   Warning: Use caution when you interpret this section. The 'dmidecode' program
```

Continued on next page

Platform Notes (Continued)

```
      reads system data which is "intended to allow hardware to be accurately
      determined", but the intent may not be met, as there are frequent changes to
      hardware, firmware, and the "DMTF SMBIOS" standard.

    BIOS IBM -[TBE105KUS-1.10]- 04/17/2015
    Memory:
     14x Hynix HMA42GR7MFR4N-TF 16 GB 2 rank 2133 MHz
     2x Hynix HMA42GR7MFR4N-TFT1 16 GB 2 rank 2133 MHz
     8x NO DIMM Unknown

  (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/home/SPEC/libs/32:/home/SPEC/libs/64:/home/SPEC/sh"
OMP_NUM_THREADS = "28"

 Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB
 memory using RedHat EL 7.0
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

Continued on next page

Base Portability Flags (Continued)

437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32 -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias -parallel

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc -opt-malloc-options=3 -auto -unroll4

Continued on next page

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: `basepeak = yes`

436.cactusADM: `basepeak = yes`

454.calculix: `-xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias`

481.wrf: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html`
`http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-HSW-B.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml`
`http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-HSW-B.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jul 14 16:21:10 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 14 July 2015.