



SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL560 Gen9
(2.00 GHz, Intel Xeon E5-4620 v3)

SPECfp®2006 = 87.3

SPECfp_base2006 = 83.0

CPU2006 license: 3


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Jun-2015

Hardware Availability: Jun-2015

Software Availability: Oct-2014

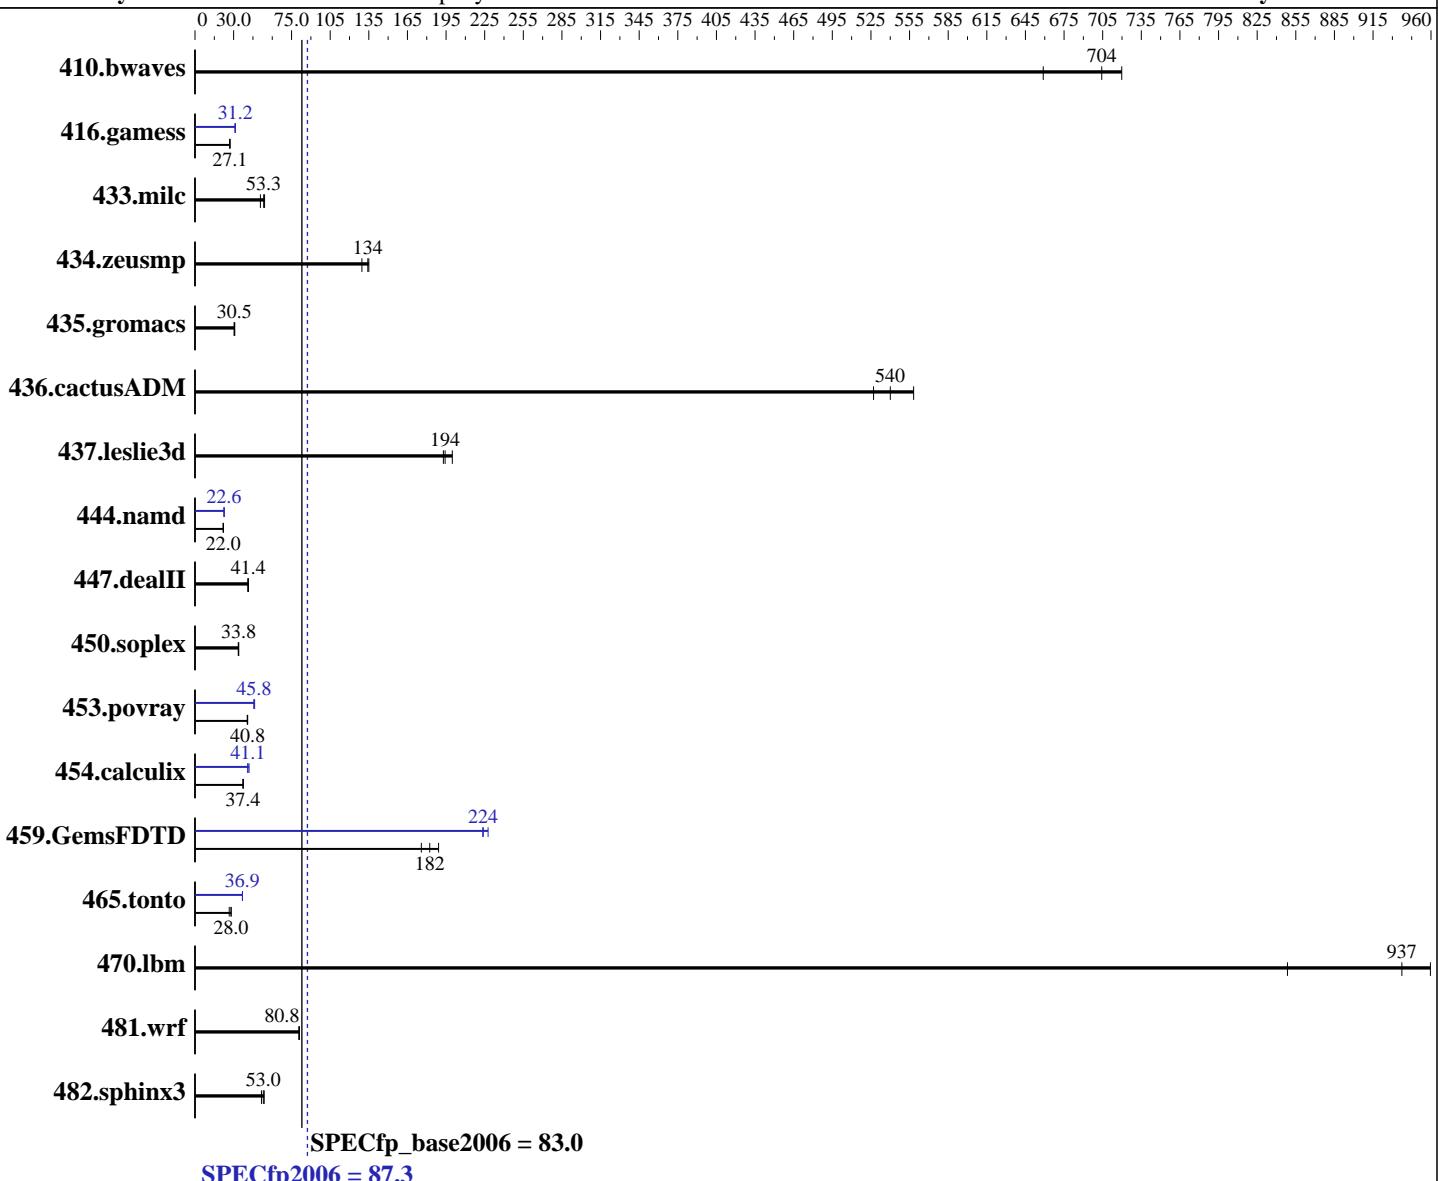

Hardware

CPU Name: Intel Xeon E5-4620 v3
CPU Characteristics: Intel Turbo Boost Technology up to 2.60 GHz
CPU MHz: 2000
FPU: Integrated
CPU(s) enabled: 40 cores, 4 chips, 10 cores/chip
CPU(s) orderable: 2,4 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 12 (x86_64)
Compiler: Kernel 3.12.28-4-default
C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;
Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
Auto Parallel: Yes
File System: xfs
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL560 Gen9
(2.00 GHz, Intel Xeon E5-4620 v3)

SPECfp2006 = 87.3

SPECfp_base2006 = 83.0

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Jun-2015

Hardware Availability: Jun-2015

Software Availability: Oct-2014

L3 Cache:	25 MB I+D on chip per chip
Other Cache:	None
Memory:	512 GB (32 x 16 GB 2Rx4 PC4-2133P-R, running at 1866 MHz)
Disk Subsystem:	2 x 400GB SAS SSD, RAID 1
Other Hardware:	None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	18.9	720	<u>19.3</u>	<u>704</u>	20.6	659	18.9	720	<u>19.3</u>	<u>704</u>	20.6	659
416.gamess	727	26.9	720	27.2	<u>722</u>	<u>27.1</u>	628	31.2	626	31.3	<u>627</u>	<u>31.2</u>
433.milc	<u>172</u>	<u>53.3</u>	181	50.8	170	54.0	<u>172</u>	<u>53.3</u>	181	50.8	170	54.0
434.zeusmp	70.2	130	<u>67.8</u>	<u>134</u>	67.4	135	70.2	130	<u>67.8</u>	<u>134</u>	67.4	135
435.gromacs	234	30.5	<u>234</u>	<u>30.5</u>	231	30.9	234	30.5	<u>234</u>	<u>30.5</u>	231	30.9
436.cactusADM	22.7	527	21.4	558	<u>22.1</u>	<u>540</u>	22.7	527	21.4	558	<u>22.1</u>	<u>540</u>
437.leslie3d	<u>48.4</u>	<u>194</u>	47.0	200	48.7	193	<u>48.4</u>	<u>194</u>	47.0	200	48.7	193
444.namd	365	22.0	<u>365</u>	<u>22.0</u>	365	22.0	<u>355</u>	<u>22.6</u>	355	22.6	355	22.6
447.dealII	<u>276</u>	<u>41.4</u>	279	41.0	276	41.5	<u>276</u>	<u>41.4</u>	279	41.0	276	41.5
450.soplex	248	33.6	245	34.0	<u>247</u>	<u>33.8</u>	248	33.6	245	34.0	<u>247</u>	<u>33.8</u>
453.povray	130	40.9	<u>130</u>	<u>40.8</u>	131	40.6	116	45.8	115	46.3	<u>116</u>	<u>45.8</u>
454.calculix	221	37.3	<u>221</u>	<u>37.4</u>	220	37.5	<u>201</u>	<u>41.1</u>	201	40.9	196	42.0
459.GemsFDTD	<u>58.2</u>	<u>182</u>	60.4	176	56.1	189	47.5	223	<u>47.4</u>	<u>224</u>	46.6	228
465.tonto	351	28.1	370	26.6	<u>352</u>	<u>28.0</u>	<u>267</u>	<u>36.9</u>	267	36.8	267	36.9
470.lbm	14.3	960	<u>14.7</u>	<u>937</u>	16.2	849	14.3	960	<u>14.7</u>	<u>937</u>	16.2	849
481.wrf	138	81.2	138	80.7	<u>138</u>	<u>80.8</u>	138	81.2	138	80.7	<u>138</u>	<u>80.8</u>
482.sphinx3	<u>367</u>	<u>53.0</u>	363	53.7	378	51.6	<u>367</u>	<u>53.0</u>	363	53.7	378	51.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Platform Notes

BIOS Configuration:

Intel Hyperthreading set to Disabled

HP Power Profile set to Custom

HP Power Regulator to HP Static High Performance Mode

Minimum Processor Idle Power Core State set to C6 State

Energy/Performance Bias set to Maximum Performance

Collaborative Power Control set to Disabled

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL560 Gen9
(2.00 GHz, Intel Xeon E5-4620 v3)

SPECfp2006 = 87.3

SPECfp_base2006 = 83.0

CPU2006 license: 3

Test date: Jun-2015

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2015

Tested by: Hewlett-Packard Company

Software Availability: Oct-2014

Platform Notes (Continued)

Thermal Configuration set to Maximum Cooling
Processor Power and Utilization Monitoring set to Disabled
Memory Refresh Rate set to 1x Refresh
Sysinfo program /home/cpu2006/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date::: 2014-06-25 #\\$ e3fbb8667b5a285932ceab81e28219e1
running on dl560gen9jks Wed Jun 10 18:37:27 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-4620 v3 @ 2.00GHz
        4 "physical id"s (chips)
        40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 10
        siblings : 10
        physical 0: cores 0 2 3 4 8 9 10 11 12
        physical 1: cores 0 2 3 4 8 9 10 11 12
        physical 2: cores 0 2 3 4 8 9 10 11 12
        physical 3: cores 0 2 3 4 8 9 10 11 12
cache size : 25600 KB
```

```
From /proc/meminfo
MemTotal:      529312800 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12
```

```
From /etc/*release* /etc/*version*
SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 0
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
        NAME="SLES"
VERSION="12"
VERSION_ID="12"
PRETTY_NAME="SUSE Linux Enterprise Server 12"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12"
```

```
uname -a:
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL560 Gen9
(2.00 GHz, Intel Xeon E5-4620 v3)

SPECfp2006 = 87.3

SPECfp_base2006 = 83.0

CPU2006 license: 3

Test date: Jun-2015

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2015

Tested by: Hewlett-Packard Company

Software Availability: Oct-2014

Platform Notes (Continued)

```
Linux dl560gen9jks 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014
(9879bd4) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jun 10 11:34 last=5
```

```
SPEC is set to: /home/cpu2006
```

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	331G	6.0G	325G	2%	/home

```
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS HP P85 03/05/2015
```

Memory:

```
24x HP 752369-081 16 GB 2 rank 2133 MHz, configured at 1866 MHz
```

```
16x UNKNOWN NOT AVAILABLE
```

```
8x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2133 MHz, configured at 1866 MHz
```

```
(End of data from sysinfo program)
```

Regarding the sysinfo display about the memory installed, the correct amount of memory is 512 GB and the dmidecode description should have two lines reading as:

```
24x HP 752369-081 16 GB 2 rank 2133 MHz, configured at 1866 MHz
```

```
8x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2133 MHz, configured at 1866 MHz
```

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

OMP_NUM_THREADS = "40"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL560 Gen9
(2.00 GHz, Intel Xeon E5-4620 v3)

SPECfp2006 = 87.3

SPECfp_base2006 = 83.0

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Jun-2015

Hardware Availability: Jun-2015

Software Availability: Oct-2014

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
  433.milc: -DSPEC_CPU_LP64
  434.zeusmp: -DSPEC_CPU_LP64
  435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
  437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
  447.dealII: -DSPEC_CPU_LP64
  450.soplex: -DSPEC_CPU_LP64
  453.povray: -DSPEC_CPU_LP64
  454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
  465.tonto: -DSPEC_CPU_LP64
  470.lbm: -DSPEC_CPU_LP64
  481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias
```

Peak Compiler Invocation

C benchmarks:

icc -m64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL560 Gen9
(2.00 GHz, Intel Xeon E5-4620 v3)

SPECfp2006 = 87.3

SPECfp_base2006 = 83.0

CPU2006 license: 3

Test date: Jun-2015

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2015

Tested by: Hewlett-Packard Company

Software Availability: Oct-2014

Peak Compiler Invocation (Continued)

C++ benchmarks:

icpc -m64

Fortran benchmarks:

fort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll14
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll12
-inline-level=0 -scalar-rep-

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL560 Gen9
(2.00 GHz, Intel Xeon E5-4620 v3)

SPECfp2006 = 87.3

SPECfp_base2006 = 83.0

CPU2006 license: 3

Test date: Jun-2015

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2015

Tested by: Hewlett-Packard Company

Software Availability: Oct-2014

Peak Optimization Flags (Continued)

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll12
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-inline-calloc -opt-malloc-options=3 -auto -unroll14

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Jul 14 16:21:46 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 14 July 2015.