SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2048U-RTR4
(X10QRH+ , Intel Xeon E5-4640 v3)

SPECfp®2006 = 90.2

SPECfp_base2006 = 84.7

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Jun-2015
Hardware Availability: Jun-2015
Software Availability: Oct-2014

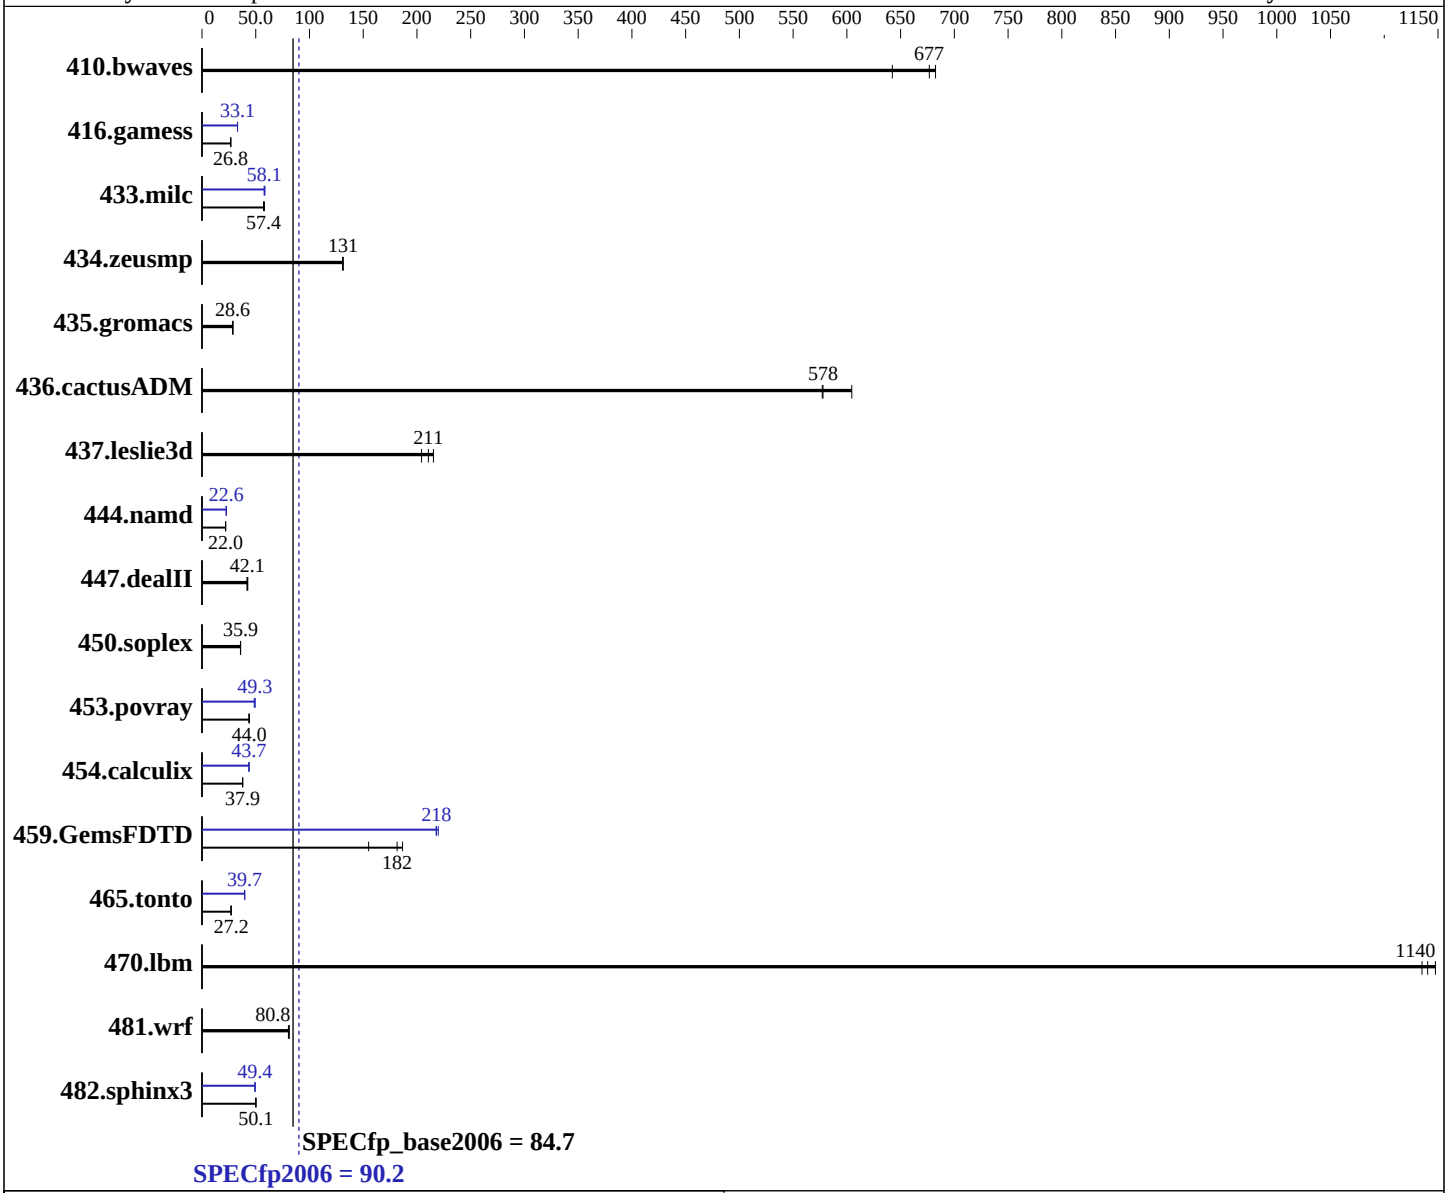

Hardware

CPU Name:	Intel Xeon E5-4640 v3
CPU Characteristics:	Intel Turbo Boost Technology up to 2.60 GHz
CPU MHz:	1900
FPU:	Integrated
CPU(s) enabled:	48 cores, 4 chips, 12 cores/chip
CPU(s) orderable:	1,2,4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 12, Kernel 3.12.28-4-default
Compiler:	C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux; Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
Auto Parallel:	Yes
File System:	ext4
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperServer 2048U-RTR4
(X10QRH+ , Intel Xeon E5-4640 v3)

SPECfp2006 = 90.2

SPECfp_base2006 = 84.7

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Jun-2015
Hardware Availability: Jun-2015
Software Availability: Oct-2014

L3 Cache: 30 MB I+D on chip per chip
Other Cache: None
Memory: 512 GB (32 x 16 GB 2Rx4 PC4-2133P-R, running at 1866 MHz)
Disk Subsystem: 1 x 600 GB SATA II, SSD
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	21.2	642	19.9	683	**20.1**	**677**	21.2	642	19.9	683	**20.1**	**677**
416.gamess	**732**	**26.8**	732	26.8	733	26.7	592	33.1	**592**	**33.1**	593	33.0
433.milc	158	58.1	**160**	**57.4**	160	57.3	**158**	**58.1**	157	58.6	159	57.8
434.zeusmp	69.5	131	69.3	131	**69.4**	**131**	69.5	131	69.3	131	**69.4**	**131**
435.gromacs	**249**	**28.6**	247	28.9	250	28.5	**249**	**28.6**	247	28.9	250	28.5
436.cactusADM	20.7	577	**20.7**	**578**	19.8	605	20.7	577	**20.7**	**578**	19.8	605
437.leslie3d	46.0	204	43.7	215	**44.6**	**211**	46.0	204	43.7	215	**44.6**	**211**
444.namd	365	22.0	**365**	**22.0**	365	22.0	354	22.6	**355**	**22.6**	355	22.6
447.dealII	**272**	**42.1**	268	42.6	272	42.0	**272**	**42.1**	268	42.6	272	42.0
450.soplex	233	35.8	232	35.9	**233**	**35.9**	233	35.8	232	35.9	**233**	**35.9**
453.povray	121	44.0	122	43.6	**121**	**44.0**	**108**	**49.3**	108	49.4	110	48.6
454.calculix	**218**	**37.9**	219	37.7	218	37.9	189	43.6	**189**	**43.7**	189	43.7
459.GemsFDTD	56.9	187	68.4	155	**58.4**	**182**	48.7	218	48.3	220	**48.6**	**218**
465.tonto	362	27.2	**362**	**27.2**	366	26.9	**248**	**39.7**	248	39.6	248	39.8
470.lbm	12.1	1140	**12.0**	**1140**	12.0	1150	12.1	1140	**12.0**	**1140**	12.0	1150
481.wrf	138	81.2	139	80.4	**138**	**80.8**	138	81.2	139	80.4	**138**	**80.8**
482.sphinx3	389	50.1	388	50.3	**389**	**50.1**	**395**	**49.4**	394	49.4	395	49.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS Settings:
Hyper-Threading (ALL) = Disable
COD Enable = Disable
Early Snoop = Disable
Enforce POR = Disabled
Sysinfo program /home/SPEC2K6/SPEC2006-V12/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on 18-216 Mon Jun 22 05:25:45 2015
```

Continued on next page

Platform Notes (Continued)

```
This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-4640 v3 @ 1.90GHz
      4 "physical id"s (chips)
      48 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 12
      siblings  : 12
      physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
      physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
      physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13
      physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13
   cache size : 30720 KB

From /proc/meminfo
   MemTotal:       529336104 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   SUSE Linux Enterprise Server 12

From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 12 (x86_64)
      VERSION = 12
      PATCHLEVEL = 0
      # This file is deprecated and will be removed in a future service pack or
      release.
      # Please check /etc/os-release for details about this release.
   os-release:
      NAME="SLES"
      VERSION="12"
      VERSION_ID="12"
      PRETTY_NAME="SUSE Linux Enterprise Server 12"
      ID="sles"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:12"

uname -a:
   Linux 18-216 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014 (9879bd4)
   x86_64 x86_64 x86_64 GNU/Linux

run-level 5 Jun 21 22:24

SPEC is set to: /home/SPEC2K6/SPEC2006-V12
   Filesystem     Type  Size  Used Avail Use% Mounted on
```

Continued on next page

Platform Notes (Continued)

```
    /dev/sda3      ext4  529G  9.1G  519G   2% /home
 Additional information from dmidecode:

    Warning: Use caution when you interpret this section. The 'dmidecode' program
    reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to
    hardware, firmware, and the "DMTF SMBIOS" standard.

   BIOS American Megatrends Inc. 1.00 05/28/2015
   Memory:
    16x NO DIMM NO DIMM
    7x Samsung(data:13/51) M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz, configured at
    1866 MHz
    3x Samsung(data:14/16) M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz, configured at
    1866 MHz
    8x Samsung(data:14/17) M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz, configured at
    1866 MHz
    6x Samsung(data:14/25) M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz, configured at
    1866 MHz
    8x Samsung(data:14/26) M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz, configured at
    1866 MHz

 (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,0,1"
LD_LIBRARY_PATH = "/home/SPEC2K6/SPEC2006-V12/libs/32:/home/SPEC2K6/SPEC2006-V12/libs/64:/home/SPEC2K6/SPEC2006-V12/sh"
OMP_NUM_THREADS = "48"

 Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB
 memory using RedHat EL 7.0
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Continued on next page

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32 -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias -parallel

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

459.GemsFDTD: `-xCORE-AVX2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-unroll2` `-inline-level=0 -opt-prefetch -parallel`

465.tonto: `-xCORE-AVX2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-inline-calloc -opt-malloc-options=3 -auto -unroll4`

Benchmarks using both Fortran and C:

435.gromacs: `basepeak = yes`

436.cactusADM: `basepeak = yes`

454.calculix: `-xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias`

481.wrf: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html`
`http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revG.20141230.00.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml`
`http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revG.20141230.00.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Aug 6 13:25:33 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 6 August 2015.