SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ZTE

ATCA SBCR (Intel Xeon E5-2628L v2)

SPECint®2006 = 40.2

SPECint_base2006 = 38.6

CPU2006 license: 3834
Test sponsor: ZTE
Tested by: ZTE

Test date: Aug-2015
Hardware Availability: Sep-2013
Software Availability: Sep-2014

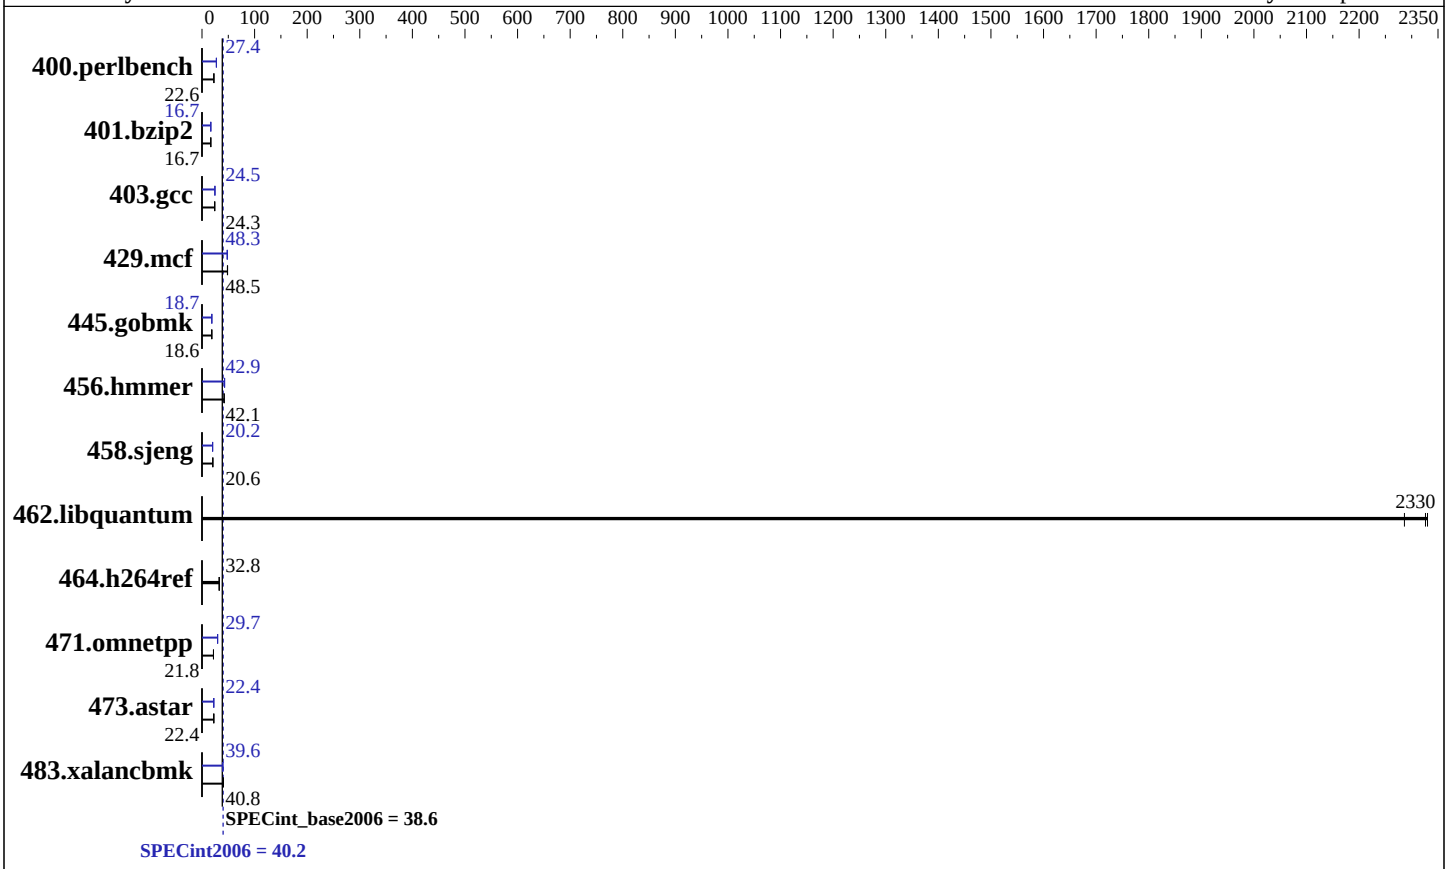

Hardware

CPU Name:	Intel Xeon E5-2628L v2
CPU Characteristics:	Intel Turbo Boost Technology up to 2.40 GHz
CPU MHz:	1900
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	20 MB I+D on chip per chip
Other Cache:	None
Memory:	128 GB (8 x 16 GB 2Rx4 PC3-10600R-9 ECC)
Disk Subsystem:	1 x 300 GB SAS, 10K RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 7.0(Maipo) 3.10.0-121.el7.x86_64
Compiler:	C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux
Auto Parallel:	Yes
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0

SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ZTE

ATCA SBCR (Intel Xeon E5-2628L v2)

SPECint2006 = 40.2

SPECint_base2006 = 38.6

CPU2006 license: 3834
Test sponsor: ZTE
Tested by: ZTE

Test date: Aug-2015
Hardware Availability: Sep-2013
Software Availability: Sep-2014

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	**433**	**22.6**	433	22.6	433	22.6	**357**	**27.4**	357	27.4	357	27.4
401.bzip2	577	16.7	578	16.7	**577**	**16.7**	577	16.7	**577**	**16.7**	577	16.7
403.gcc	337	23.9	331	24.3	**332**	**24.3**	328	24.5	328	24.6	**328**	**24.5**
429.mcf	187	48.7	189	48.3	**188**	**48.5**	191	47.7	**189**	**48.3**	189	48.3
445.gobmk	**564**	**18.6**	563	18.6	564	18.6	562	18.7	563	18.6	**562**	**18.7**
456.hmmer	**222**	**42.1**	222	42.0	222	42.1	217	42.9	**217**	**42.9**	217	43.0
458.sjeng	588	20.6	588	20.6	**588**	**20.6**	**599**	**20.2**	600	20.2	599	20.2
462.libquantum	9.06	2290	**8.91**	**2330**	8.89	2330	9.06	2290	**8.91**	**2330**	8.89	2330
464.h264ref	**675**	**32.8**	675	32.8	676	32.7	**675**	**32.8**	675	32.8	676	32.7
471.omnetpp	**286**	**21.8**	286	21.8	287	21.8	211	29.6	**211**	**29.7**	210	29.7
473.astar	313	22.4	313	22.4	**313**	**22.4**	313	22.4	314	22.4	**314**	**22.4**
483.xalancbmk	170	40.7	**169**	**40.8**	169	40.8	174	39.6	174	39.6	**174**	**39.6**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS settings:
Turbo boost Technology enabled
Virualization Technology disabled
Hyper Threading Technology disabled
Sysinfo program /home/speccpu/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ 2b55956e7c0e338e808a36a21505f13a
running on localhost.localdomain Mon Aug 10 07:56:26 2015

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2628L v2 @ 1.90GHz
      2 "physical id"s (chips)
      16 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
```

Continued on next page

Platform Notes (Continued)

```
        cpu cores : 8
        siblings  : 8
        physical 0: cores 0 1 2 3 4 5 6 7
        physical 1: cores 0 1 2 3 4 5 6 7
     cache size : 20480 KB

  From /proc/meminfo
     MemTotal:       131797868 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     os-release:
        NAME="Red Hat Enterprise Linux Server"
        VERSION="7.0 (Maipo)"
        ID="rhel"
        ID_LIKE="fedora"
        VERSION_ID="7.0"
        PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
        ANSI_COLOR="0;31"
        CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
     redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
     system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
     system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server

  uname -a:
     Linux localhost.localdomain 3.10.0-121.el7.x86_64 #1 SMP Tue Apr 8 10:48:19
     EDT 2014 x86_64 x86_64 x86_64 GNU/Linux

  run-level 3 Aug 10 07:55

  SPEC is set to: /home/speccpu
     Filesystem            Type  Size  Used Avail Use% Mounted on
     /dev/mapper/rhel-home xfs   225G   79G  146G  36% /home
  Additional information from dmidecode:

     Warning: Use caution when you interpret this section. The 'dmidecode' program
     reads system data which is "intended to allow hardware to be accurately
     determined", but the intent may not be met, as there are frequent changes to
     hardware, firmware, and the "DMTF SMBIOS" standard.

    BIOS American Megatrends Inc. CORE4.6.5_UBF3.10.49_SVN57833 05/06/2015
    Memory:
     8x Micron 36KSF2G72PZ-1 16 GB 2 rank 1333 MHz

  (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/speccpu/libs/32:/home/speccpu/libs/64:/home/speccpu/sh"
OMP_NUM_THREADS = "16"

 Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB
 memory using RedHat EL 7.0
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Base Compiler Invocation

C benchmarks:
```
icc  -m64
```

C++ benchmarks:
```
icpc -m64
```

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
```
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32
```

C++ benchmarks:
```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -Wl,-z,muldefs
-L/sh -lsmartheap64
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m64`

400.perlbench: `icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32`

445.gobmk: `icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32`

C++ benchmarks (except as noted below):
`icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32`

473.astar: `icpc -m64`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
473.astar: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xAVX`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-opt-prefetch` `-ansi-alias`

401.bzip2: `-xAVX`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div` `-prof-use`(pass 2) `-auto-ilp32` `-opt-prefetch` `-ansi-alias`

Continued on next page

Peak Optimization Flags (Continued)

403.gcc: `-xAVX -ipo -O3 -no-prec-div -inline-calloc -opt-malloc-options=3 -auto-ilp32`

429.mcf: `-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32`

445.gobmk: `-xAVX`(pass 2) `-prof-gen`(pass 1) `-prof-use`(pass 2) `-ansi-alias`

456.hmmer: `-xAVX -ipo -O3 -no-prec-div -unroll2 -auto-ilp32 -ansi-alias`

458.sjeng: `-xAVX`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-unroll4`

462.libquantum: `basepeak = yes`

464.h264ref: `basepeak = yes`

C++ benchmarks:

471.omnetpp: `-xAVX`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-opt-ra-region-strategy=block -ansi-alias -Wl,-z,muldefs -L/sh -lsmartheap`

473.astar: `-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -Wl,-z,muldefs -L/sh -lsmartheap64`

483.xalancbmk: `-xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias -Wl,-z,muldefs -L/sh -lsmartheap`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html
http://www.spec.org/cpu2006/flags/ZTE-Platform-Flags-V2.0.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/ZTE-Platform-Flags-V2.0.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Sep 8 22:41:03 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 8 September 2015.